ENGINEERING NEWS-RECORD

A McGRAW HILL PUBLICATION

Welded Steel Penstocks at Hungry Horse Dam

Four welded steel penstocks, each 448 ft. long, will deliver water to the 105,000-hp turbines in the power house at the Hungry Horse dam in Northwest Montana. We fabricated the steel for these penstocks in our shops at Salt Lake City and welded it into sections 20 ft. long at the dam site. The view below shows some of the sections in a storage yard ready for delivery to the dam.

The four penstocks are made of plates ranging from ⅜ in. to 1⅝ in. in thickness. They are 13 ft. 6 in. in diam. at the upper end and 11 ft. 9 in. in diam. at the lower end. Constructing them in sections required approximately 8,100 lineal feet of automatic machine welding and 1,300 ft. of hand welding. Installation of these penstock sections at the dam will require an additional 1,000 feet of hand welded seam.

The internal "spiders" are used to retain the circular shape of the penstock sections during handling and while concrete is being poured around them. After the concrete sets, the spiders will be removed.

The penstock installation at the Hungry Horse project illustrates how well we are equipped to handle steel plate work for construction projects. We also fabricate and erect plain and differential surge tanks, smokestacks, large-diameter pipe, flat-bottom reservoirs, elevated water tanks, and similar steel plate structures. Let our nearest office furnish estimates for your next job.

The name "Hungry Horse" comes, we are told, from a story about two run-away horses that spent the winter of 1900-1 in this area and were found in an almost starved condition. The statuette below is rapidly becoming known as a symbol for the project.

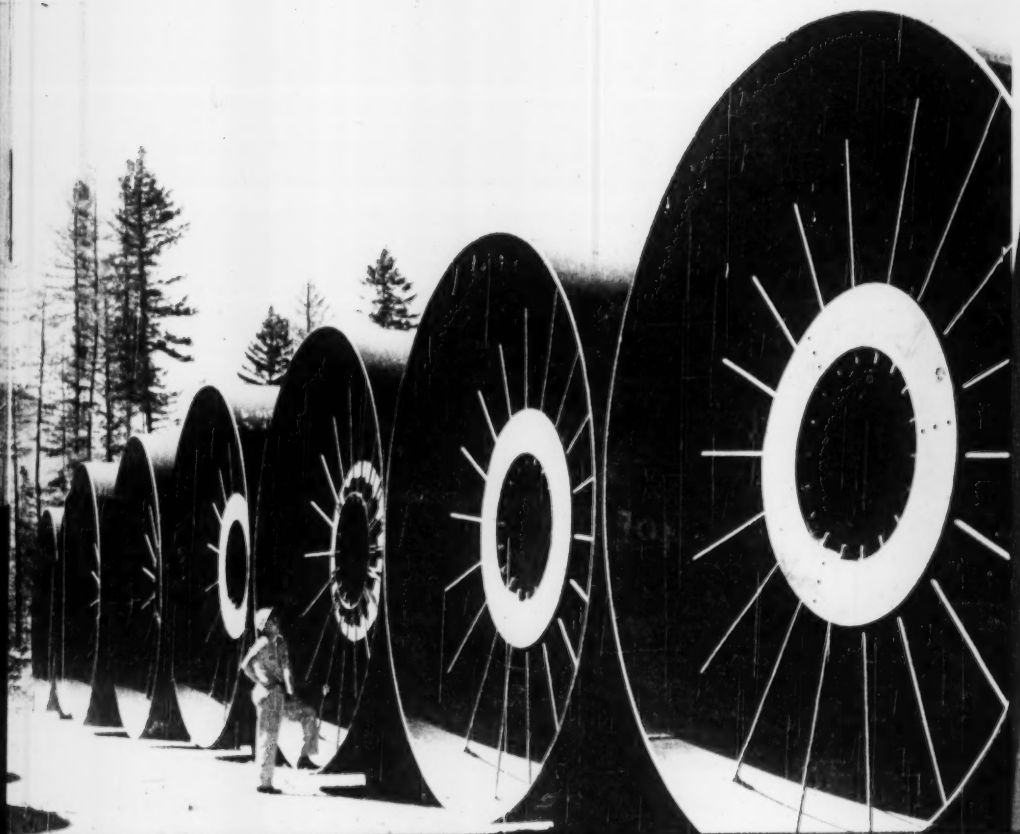

CHICAGO BRIDGE & IRON COMPANY

Atlanta, 3	1125 Healey Building	Detroit, 26	1506 Lafayette Building	Philadelphia, 3	1633—1700 Walnut St. Building
Birmingham, 1	1320 North 50th Street	Houston, 2	2109 National Standard Building	Salt Lake City, 4	512 West 17th South Street
Boston, 10	1012—281 Devonshire Street	Havana	402 Abreu Building	San Francisco, 4	1230-300 Bush Street
Chicago, 4	2101 McCormick Building	Los Angeles, 17	1511 General Petroleum Building	Seattle, 1	1312 Henry Building
Cleveland, 15	2231 Guildhall Building	New York, 6	3311—165 Broadway Building	Tulsa, 3	1617 Hunt Building

Plants in BIRMINGHAM, CHICAGO, SALT LAKE CITY, and GREENVILLE

In Canada: HORTON STEEL WORKS, Limited, FORT ERIE, Ont.

HENRY DOELGER PICKS LPC MOTOR SCRAPERS

for 12 million ...!

MOVING 12 million yards of sand is a man-sized job in anyone's language. Henry Doelger of San Francisco tackled it to make room for a 7000 new home housing project at Westlake, south of San Francisco. Six LaPlant-Choate Motor Scrapers are moving 11,700 yards per 8-hour day, working on a 1600-ft. cycle. Each load averages 14.3 pay yards. Material is damp sand, weighing 3000 lbs. to the yard. Average loading time is 1-minute. All ejection and spreading is done in high gear. Each unit hauls 17 loads in a 50-min. hr.

Whether you're moving sand, mud or good scraper dirt, you'll be money ahead if you use profit-making LPC Motor Scrapers. Get the story *first* hand — talk to the men who own them or run them. There are reasons why more and more smart contractors are using the Motor Scraper.

Available now in 2 sizes. The "300" in the 14-17.5 yard class. The "200" in the 9-12 yard class. LaPlant-Choate Manufacturing Co., Inc., Cedar Rapids, Iowa; LaPlant-Choate Sales & Service, 1022 77th Ave., Oakland, Calif.

LAPLANT CHOATE

Cable-operated Scrapers in 6-, 8- and 14-yd. sizes for all makes of track-type tractors.

2- and 4-yd. Scrapers for track-type and rubber-tired industrial tractors.



Hydraulic and Cable-operated Dozers.

ENGINEER'S FILE ON HYDROGRAPHIC INSTRUMENTS

STEVENS
HYDROGRAPHIC INSTRUMENTS

A wide range of precision measuring instruments to record and indicate head, flow, and totalize flow; for waterworks, sewerage, irrigation and industrial uses. New, low cost methods of liquid level recording.

These methods and instruments for all liquid measuring problems are listed in a complete Engineer's Data folder for your convenience. This information folder is FREE and can be had by filling in the coupon below. The folder includes data on instruments to record fluctuations of liquids in oil production, stream gaging, deep wells, sewage, irrigation, etc., both accurately and economically.

STAFF GAGES



An inexpensive, dependable means of measuring liquid levels. They are designed so as not to affect the flow of liquid. Porcelain enameled for easier reading . . . accurately graduated in English or metric system . . . will not rust or discolor. Staff gages are available in a wide range of lengths and widths — Staff gages for as little as $1.00. Complete information in the Engineer's Data Folder.

Leupold and Stevens pioneered the field of water level recording 43 years ago, and since then have developed precision measuring instruments of all types and descriptions to meet many specific needs.

Write for the complete file. There may be a measuring device that exactly suits your specific requirements. Use the coupon below.

Please send me the Engineer's Data Folder with complete information on Hydrographic instruments.

Name _____

Address _____

City _____ State _____

LEUPOLD & STEVENS INSTRUMENTS, INC.
4445 N.E. Glisan • Portland 13, Oregon

ENGINEERING NEWS-RECORD

Volume 144 · JUNE 29, 1950 · No. 26

WALDO G. BOWMAN
Editor

FEATURE IN THIS ISSUE

Taming the Columbia River at McNary Dam . . . Col. Wm. Whipple . . . 29

New York's Hudson River Pumping Plant . . . 33

Canada's First Subway . . . 36

Building Raised by Its Boot Straps . . . 38

Rapid-Stability Test for Asphaltic Concrete Mixes . . . 43

How to Rip Rails Out of Pavements . . . 44

Perspective—Detroit's Stream-Pollution Problem . . . 96

DEPARTMENTS

Construction Week . . . 17
Construction Trends . . . 19
Editorials . . . 21
News of the Week . . . 23
Notes on Legal Decisions . . . 40
Reader Comment . . . 45
Developments Abroad . . . 46
Municipal Affairs . . . 51
Men and Jobs . . . 52
Education and Research . . . 53
Obituaries . . . 57
Election and Activities . . . 58
Unit Prices . . . 60
Construction Reports . . . 61
New Products . . . 84

Number of copies of this issue printed: 45,411

Managing Editor—Eugene E. Halbouse, Jr.
Associate Editors—*New York*, V. T. Boughton (senior associate), J. C. Dunnstead, G. H. Brady, R. N. Larkin, F. S. Merritt; *Chicago*, J. R. Carr; *San Francisco*, N. A. Bowers; L. L. Wise; *Washington*, V. B. Smith.
Assistant Editors—*New York*, Melvin Dean, Arthur J. Fox, Jr., T. D. Macgregor.
Staff Assistants—Ruth Imler, *Research*; Ethel Lyon, *Makeup*; R. P. Munyon, *Production*; Louise Barker, Ruth McCarthy, Madelaine Smith, *Editorial*.
Business News—Elsie Eaves, *Manager*; E. M. Hiller, Jane Lucia, J. A. Mahoney, Frederick Lee Moore, Jr., M. W. Roessler, M. Weitzel.
Contributing Editor—Edward J. Cleary.
Domestic News Bureaus—Atlanta, Chicago, Cleveland, Detroit, Houston, Los Angeles, San Francisco, Washington. Correspondents in 21 cities in the United States, Canada and Mexico.
Foreign News Bureaus—London, Frankfurt, Paris, Moscow, Tokyo, Bombay, Melbourne, Rio de Janeiro, Mexico City. Correspondents—Athens, Buenos Aires, Caracas, Buenos Aires, Santiago, Shanghai, Zurich, Johannesburg and 40 other cities.

Member ABC · ROBERT F. HOGAN, Publisher · Member AEP

ENGINEERING NEWS-RECORD Vol. 144—No. 26

June 29, 1950
Publication Office—99-129 N. Broadway, Albany 1, N. Y.
Executive and Editorial Offices—330 West 42nd St., New York 36, N. Y.

Copyrighted 1950 by McGraw-Hill Publishing Co. All rights reserved. Published every Thursday by McGraw-Hill Publishing Co., James H. McGraw (1860-1948), Founder. CURTIS W. McGRAW, President and Treasurer. JAMES H. McGRAW, JR., Executive Vice President. JOSEPH A. GERARDI, Secretary. HUGH J. KELLY, Vice President. WILFRED I. DUVALL, Assistant Treasurer. DONALD C. McGRAW, Vice President. Publication Office, 99-129 N. Broadway, Albany 1, N. Y. Editorial and Executive Offices, 330 West 42nd St., New York 36, N. Y. Cable address: McGRAW-HILL, New York. Telephone: LOngacre 4-3000. Teletype: NY 1-2300. Branch Offices: 520 North Michigan Ave., Chicago 11, Ill.; 68 Post St., San Francisco 4, Calif.; 1125 Sixteenth St., N.W., Washington 6, D. C.; 1370 Standard St., Cleveland 13, Ohio; 2-273 General Motors Bldg., Detroit 2, Mich.; 1321 Rhode Island Ave., N.W., Washington 5, D. C.; 1520 Locust St., Philadelphia 2, Pa.; 1800 Oliver Bldg., Pittsburgh 22, Pa

CLYDE

Portable* BUILDERS TOWERS

many SAVES^ COSTLY MAN-HOURS

Easily moved from job to job!

No wasted time!

No loss of material!

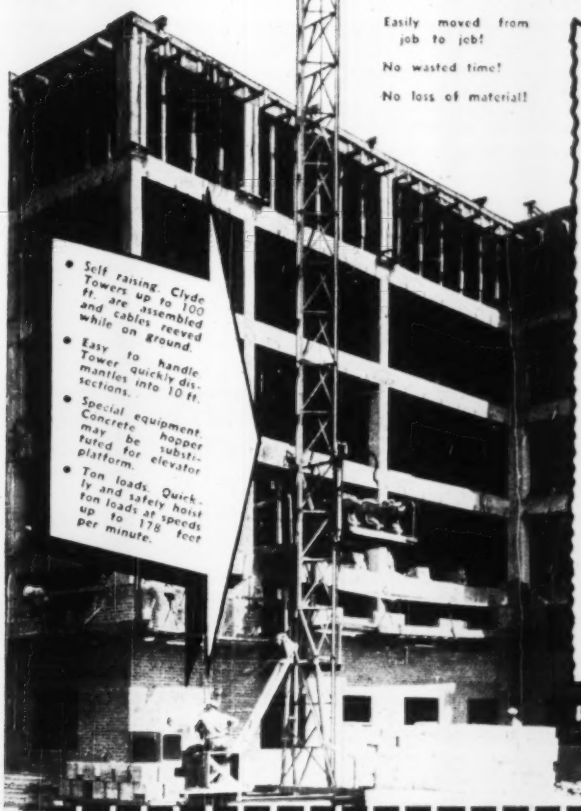

- Self raising. Clyde Towers up to 100 ft. are assembled and cables reeved while on ground.
- Easy to handle. Tower quickly dismantles into 10 ft. sections.
- Special equipment. Concrete hopper may be substituted for elevator platform.
- Ton loads. Quickly and safely hoist ton loads at speeds up to 178 feet per minute.

Cut Costs!

Speed Materials Handling!

*Clyde Portable Builders Towers offer many money-saving and time-saving advantages. Time saved in the erection and dismantling, as compared to other type elevators, effects large savings **measurable in cold cash!** Clyde Towers are built for long life, dependable performance, and eliminate maintenance and replacement costs of timber tower. But more than that, Clyde Portable Builders Tower are **safety engineered** to minimize construction job hazards. No acrobats or dare-devils are needed to erect a Clyde . . . it's assembled on the ground and raised into position with its own hoist!

For safety, for convenience, for large savings measurable in cold cash, get a Clyde! **You can expect,** AND GET, more when you buy a Clyde portable builders tower.

Check these Clyde Features

- ✓ Safety brake automatically locks load in in case of cable failure.
- ✓ A 2,000 lb. capacity tower derrick available as extra equipment.
- ✓ May be transported on trailer wheels or loaded on a truck.

For Complete Facts write for Bulletin A-11

Tower hoist quickly and easily raises tower into position. No outside crane is needed. Clyde Portable Builders Towers are fast, safe, convenient to erect.

Tower is quickly and easily assembled, and cable reeved while tower is on ground. Only two men are required to handle and erect complete.

Tower is easily and quickly lowered and dismantled for transport. May be loaded on truck or towed on trailer wheels which attach to tower base.

CLYDE IRON WORKS, Inc.

DULUTH 1, MINNESOTA

A SUBSIDIARY OF Barium STEEL CORPORATION Steelmaking for the Nation

Hoists • Derricks • Whirleys • Builders Towers • Car Pullers • Handi-Cranes • Rollers •

Ezebilt

The Fastest SCAFFOLDING assembly ever devised!

Ezebilt Mason Panel—used with brackets, quickly erects to any height—provides a convenient materials handling area.



SL Standard Panel 2', 3 ft. heights

SS Standard Panel 4-4', 5 ft. heights



SU Mason Panel 4-4', 5 ft. heights

SH Ladder Panel 6½ ft. high

PSW Putlogs—up to 22¼ ft. span

Above are sketched just a few of the many basic Ezebilt parts—all interchangeable—all assembled with no bolts, no wing nuts, no loose parts.

"Up Faster—no bolts to master"

To erect a scaffolding without losing time working with or looking for loose parts—specify Universal Ezebilt. Everything necessary for assembling the different panels, stringers, and braces is contained right in the "Gravity Lock"... just put the units into position and the scaffolding virtually assembles itself.

Note in the Diagram how easy and fast an Ezebilt installation can be made. In the simple "Gravity Lock" design, the side braces and horizontal braces are attached to the panel legs . . . no nuts, bolts, or tools required.



Send for name of nearest distributor—or write for new Ezebilt Catalog

UNIVERSAL MANUFACTURING CORP.
200 NORTH STREET · ZELIENOPLE (Pgh. District) PA.

EZEBILT Tubular Steel Panel Scaffolding, LADIS All-Lightweight Scaffolding, Elevating Towers, Rolling Maintenance Towers, Portable Steel Beachers, Agricultural Equipment, Endax Clamp-Type Scaffolding.

NEWS BRIEFS

Like Depression Days—Columbia Steel Co.'s Torrance, Cal., plant will complete installation of the industry's first smoke and fume elimination device for open-hearth furnaces by Oct. 31. About $600,000 worth of electrostatic precipitators will be installed. They'll pass gases through discharge flues, cooling them from 1,300 to 500 deg. F., and precipitate the solids.

Sunlight's at Fault—Pennsylvania's Health Department reports what it calls a valuable research tool. It's found that as much as 1,000 ppm of cyanide in water will have no adverse effect upon fish until the cyanide is exposed to sunlight. Thereafter, one ppm will kill the fish within an hour.

Add Union Rules—Virginia's issued some instructions to the crews that paint and replace the white lines dividing traffic. It's forbidden on holidays, week-ends and near large gatherings; discontinued at peak hours; done on clear days to speed drying; and done in sections on long grades.

Construction Cost Note—With construction just begun on its $8,000,000 Alaskan Way viaduct, Seattle finds it has spent almost $1,000,000 on condemnation costs. The condemnation was the largest in the city's history, raised some legal points unique there. Many concerned the effect and cost of impairment of "light, air and access."

Important Election—Akron, Ohio, voters will have a part in one of the nation's most significant senatorial elections this fall, wherein Sen. Taft stands for reelection. Adding interest may be a $15,000,000 bond issue. It would be in connection with a $17,000,000 school construction program now being planned by the Akron Board of Education.

"Out-of-the-Mud" Stuff—South Carolina's Highway Commission has adopted a $2,500,000 farm-to-market road paving program for 1950-51. This amount brings to $29,500,000 the funds directed by the state to rural and suburban roads since the war.

Rules, Rules, Rules—A fifth Pennsylvania industry now has a set of standards under which to operate in treating its wastes. It's the pulp and paper industry. Earlier sets of regulations covered milk, oil well, gas well and steel mill pickling liquor waste treat-

(Continued on page 6)

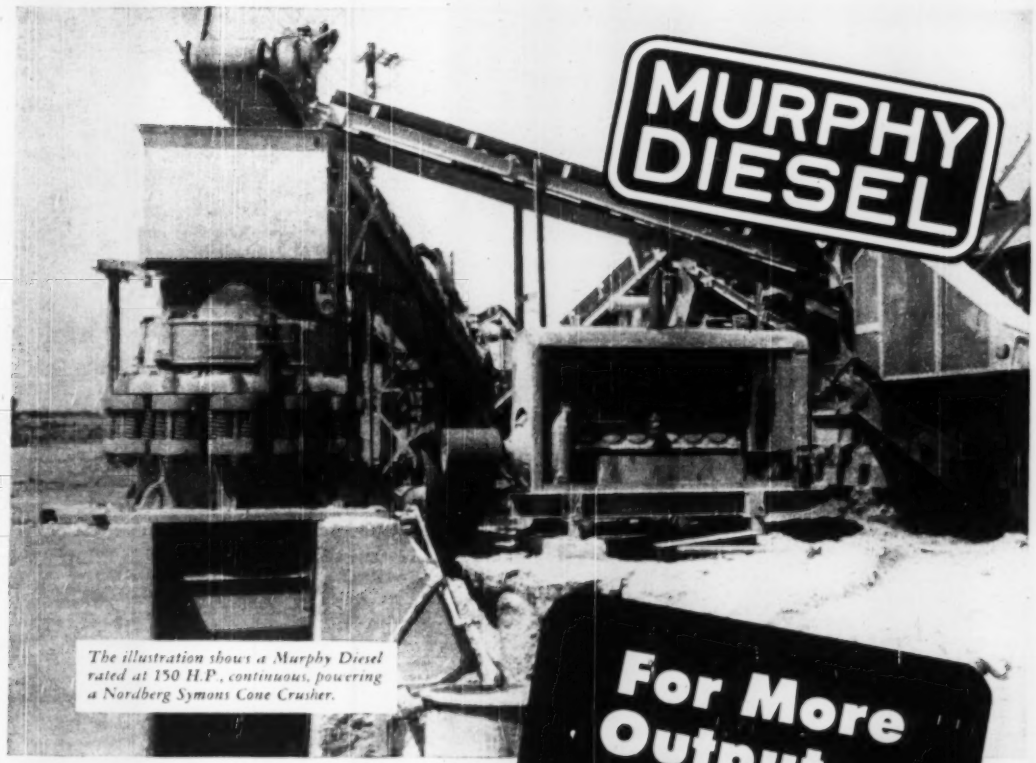

The illustration shows a Murphy Diesel rated at 150 H.P., continuous, powering a Nordberg Symons Cone Crusher.

For More Output... At Lower Cost

ANY crushing job will be more profitable when you have economical, dependable power. And that's just what has made Murphy Diesels so popular with crushing plant owners everywhere. The Murphy Diesel is a rugged, heavy duty power plant built to deliver its full rated power 24 hours a day, day-in and day-out. It's economical, too — *the Murphy Diesel uses less fuel per horsepower hour than any other engine in its size range.*

Such engineering features as "true" diesel operation, unit fuel injection, four valves per cylinder, hydraulic servo-type governor and many others are the reasons why Murphy Diesels are able to compile such impressive records. Of particular interest to crushing plant operators are the Murphy features that guard the engine against the destructive effects of dust and dirt — large oil bath air filter, positive filtered crankcase ventilation and full flow absorbent type fuel and lube oil filters . . . extra protection for you under rock crushing conditions.

Get full information on Murphy Diesel. Ask your Murphy Diesel Dealer or write directly.

MURPHY DIESEL COMPANY
5311 W. Burnham St., Milwaukee 14, Wisconsin

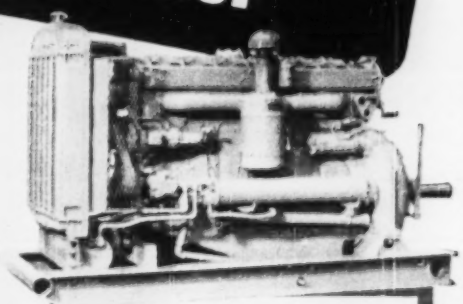

Heavy duty power

for construction

Murphy Diesel Engines and Power Units for construction, 90 to 220 H.P. Generator Sets, 60 to 133 K.W.

Performance that "PROMOTES A PREFERENCE"

FOR OWEN BUCKETS

Buckets AND Grapples

Write for Catalog

"A mouthful at every bite"

THE OWEN BUCKET CO.

6010 Breakwater Avenue • Cleveland, Ohio

Branches: New York; Philadelphia; Chicago; Berkeley, Calif.

(Continued from page 4)

ments. Standards were prepared by the Health Department and a committee representing the industry.

No Free Ride—Connecticut law now provides that city housing authorities reimburse the state for work done by the state authority. That will eliminate all cost to the state of a program for which the state takes considerable credit.

Believe It or Not—A Texas company has just completed a loan so large that it had to go all the way to Pennsylvania and New Jersey to raise the money. Lone Star Gas Co., of Dallas, borrowed $85,000,000 from three Fort Worth, five Dallas and three Pittsburgh banks and the Prudential Insurance Co. The latter loaned $65,000,000 of it. The money's for a five-year expansion program which will call for new gasoline recovery, development and exploration programs and an expanded distribution system. It's described as the Southwest's largest single financial transaction.

No Drouth Now—San Francisco has completed a second pipeline to bring Hetch Hetchy water to the city. The 33-mi, $8,500,000, steel and concrete line adds 20 mgd to the city's supply, an increase of one-third in the mountain water flow. Other water is available from springs around the city.

Big Job—Illinois faces a 10-year job to correct its highway deficiencies, a Congressional committee found. Only California and Ohio have bigger road rehabilitation jobs, the report asserted. Almost 65,000 of the 87,759 mi of roadway were classed as deficient.

Money Trouble—Army Engineers and the city of Los Angeles are squabbling over division of costs on the proposed $25,000,000 yacht harbor at Playa del Rey beach. City proposes to pay $16,505,000. The Army says $19,427,000 is about right. The Board of Engineers for Rivers and Harbors also says no agreement exists between city and county on control of the harbor after it's done.

Careful, Please—Publicity for the New York State Thruway asks motorists to be careful of its surveyors, who'll be necessary for the 480-mi road between New York City and Buffalo. State has less than 2,000 of them, according to the Public Works Department. It costs $5,000 to train them and their experience is even more valuable.

When is a Revenue Bond?—Kentucky

(Continued on page 124)

OVER 60% OF ALL EUCLIDS SOLD ARE REPEAT ORDERS . . .

PROOF of CUSTOMER SATISFACTION . . . . . PROFITABLE PERFORMANCE !

BOTTOM-DUMP EUCLIDS
13 to 25 cu. yd. capacity. Top speeds loaded up to 34.4 m.p.h.

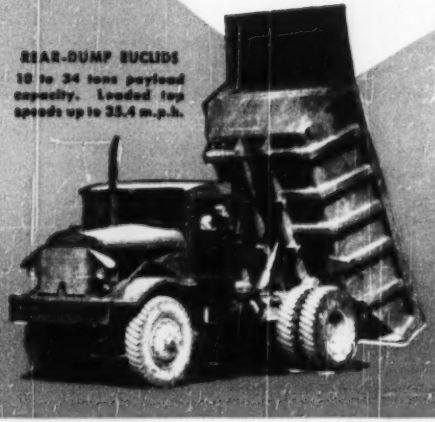

REAR-DUMP EUCLIDS
10 to 34 tons payload capacity. Loaded top speeds up to 35.4 m.p.h.

Leading contractors and industrial users buy "Eucs" because they are designed and built throughout for heavy off-the-highway hauling. And because Euclids are job proved for high production at the lowest cost per ton or yard moved, owners add to their fleets as more equipment is needed.

Nine out of every 11 Euclids built are still in use today. Their ability to stay on the job year after year under a wide range of operating conditions means more yards moved at greater profit.

Euclid owners also know they can depend on prompt, efficient service from Euclid's world-wide distributor organization.

Write for information on the complete line of Euclid equipment or see your Euclid Distributor today.

The EUCLID ROAD MACHINERY Co., Cleveland 17, Ohio
CABLE ADDRESS: YUKLID—CODE: BENTLEY

EUCLIDS *Move the Earth*

Buy balanced

FOR MORE WORK

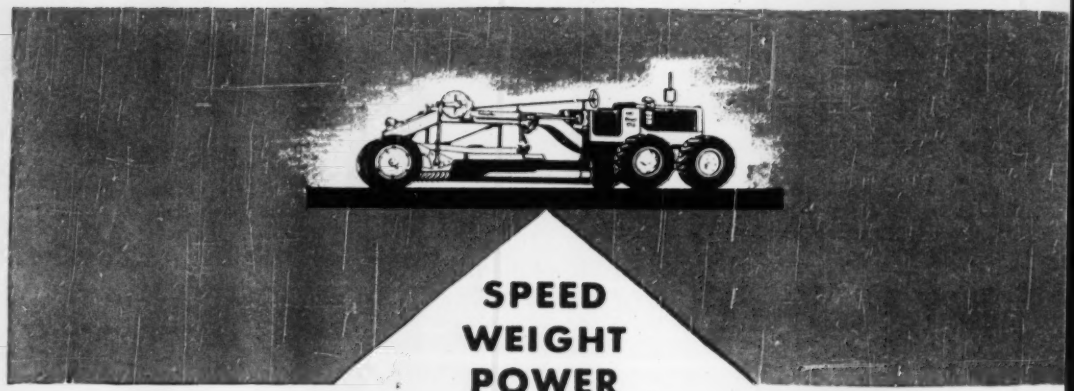

THE OWNER of the "Cat" No. 212 Grader shown here has a unique problem. "Can't keep operators away from the rig," says D. W. Klock, vice president of the Klock Construction Company, Amarillo, Texas. "This Motor Grader is so fast, maneuverable, and well balanced, the boys *all* want to run it!"

Balance is the secret of "Cat" Graders' popularity with owner and operator alike. "Caterpillar" builds each Motor Grader from the ground up as an individual unit. The correct weight, plus the right horsepower, plus rated work speed—these things add up to *balanced* machines that solve your job problems at lower cost.

Informed buyers are finding that *assembled* motor graders are often poorly balanced. It stands to reason that when one engine or one frame is used for more than one model, the best use cannot be made of weight and power. But balanced "Cat" rigs are neither muscle-bound nor jumpy on the job. Their matching power cuts costs through superior performance and longer service life.

There's a size "Cat" Motor Grader for every type of work—with the stamina, punch and balance to do a particular job best. And don't forget what world-famous "Caterpillar" dealer service means in keeping equipment on the job—cutting down-time to the bone. Ask your "Caterpillar" dealer to show you his Motor Graders' bonus features—from tough blades with the maneuverability of a boarding-house reach, to "Hi-Electro" hardened final drive gears built to last.



LOOK UNDER THE HIDE

Fuel pumps are "Caterpillar"-designed and "Caterpillar"-built. Made of the cleanest high-chromium, high-carbon alloy steel obtainable, the pump plungers and barrels are diamond lapped. Pumps are heat-treated to maximum hardness to give users thousands of hours of trouble-free economical service. There is an individual pump for each cylinder. Pumps are adjustment-free and completely interchangeable. Look under the hide for quality—it doesn't show on the outside, it shows up in performance.

CATERPILLAR

REG. U. S. PAT. OFF.

"Cat" graders

AT LESS COST

Here's the Klock Construction Company's "Cat" No. 212 Grader working on the new municipal football stadium in Amarillo. Does subgrade, shoulder work and drainage. It's punched the Klock Co.'s time clock for 5186 hours of work. D. W. Klock says, "This Cat No. 212 Grader is the backbone of our street, alley and parking area work in the city of Amarillo. It's especially well balanced, and just the right size for our work. Small enough to work in close places, but powerful enough for big production—and fast getting from one job to another. Going to buy another just like it this year!"

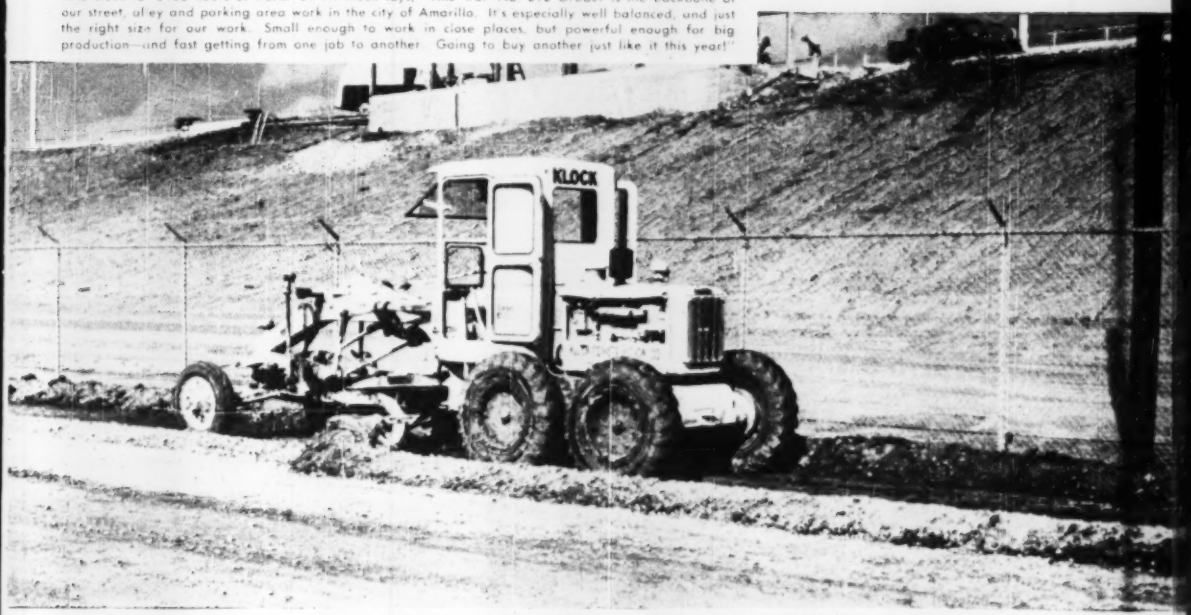

NO. 12

In a No. 12 "Cat" Motor Grader you get a No. 12 from stem to gudgeon. The "Cat" Engine was built for a frame that gets full use out of its 100 hp. And the working speed range was engineered to get maximum production at each speed.

WEIGHT	22,300 lbs.
ENGINE	100 hp.
SPEEDS: 1st	2.3 mph.
2nd	3.6 "
3rd	5.5 "
4th	8.5 "
5th	12.0 "
6th	19.1 "
1st R.	2.7 "
2nd R.	4.1 "

Price of the standard model No. 12 is $10,920. f. o. b. Peoria, subject to change without notice.

NO. 112

With the No. 112 you get the No. 112's 75 hp. Engine on a No. 112 frame, with a No. 112 weight and a No. 112 transmission. You don't get mismatched power, weight or speed.

WEIGHT	19,430 lbs.
ENGINE	75 hp.
SPEEDS: 1st	2.1 mph.
2nd	3.6 "
3rd	4.9 "
4th	5.6 "
5th	11.2 "
6th	16.0 "
1st R.	2.8 "
2nd R.	4.0 "

Price of the standard model No. 112 is $9545. f. o. b. Peoria, subject to change without notice.

NO. 212

When you buy a No. 212 you get the same balanced performance. It has its own weight, its own frame, its own "Cat" Engine, its own working speeds.

WEIGHT: tandem drive	13,290 lbs.
single drive	11,010 "
ENGINE	90 hp.
SPEEDS: 1st	2.0 mph.
2nd	3.[illegible] "
3rd	4.[illegible] "
4th	11.9 "
R	2.6 "

Price of the standard model No. 212 is $6435. f. o. b. Peoria, subject to change without notice.

DIESEL ENGINES • TRACTORS
MOTOR GRADERS
EARTHMOVING EQUIPMENT

CATERPILLAR, PEORIA, ILLINOIS

DON'T GET HOOKED...

BY

1.

SALESMEN WHO ROLL OUT THE CARPET FOR PROSPECTS

2.

... AND LET YOU DOWN ONCE YOU'RE SOLD

5.

WE WORK HAND IN HAND WITH YOU TO HELP

UP PRODUCTION AND LOWER COSTS...

AMERICAN MUTUAL ...the first American liability insurance company

© 1950 AMERICAN MUTUAL LIABILITY INSURANCE COMPANY

GET HAPPY! (WE SELL YOU AFTER YOU'RE SOLD!)

MR. FRIENDLY

ARE VERY MUCH FROWNED ON AT AMERICAN MUTUAL!

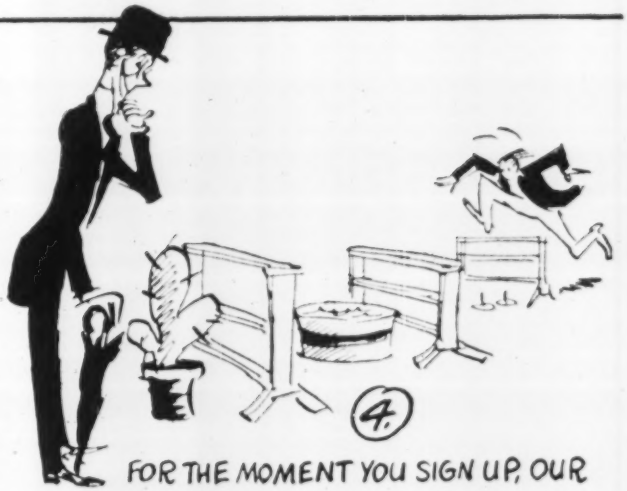

FOR THE MOMENT YOU SIGN UP, OUR SERVICE REALLY BEGINS...WE STUDY YOUR ACCIDENT HAZARDS AND TRY TO ELIMINATE THEM...

RESULT:

This special service (included at no extra charge with every industrial policy) has increased production and reduced premium costs to as much as 50% below the average rate for some businesses! If you're interested in service that saves . . . see your local Mr. Friendly. Let him show you "The All-American Plan" for your business.

MAIL THIS COUPON NOW—WITHOUT DELAY!

Dept. O-96, American Mutual Liability Insurance Company
142 Berkeley Street, Boston 16, Massachusetts

Without obligation, please *rush* to me information on *The All-American Plan* so that I may be richer and happier!

*Name*_____

*Street*_____

*City*_____ *State*_____

A M

to meet
Your Specific **TRAILER REQUIREMENTS**

Rogers utilizes basic proven designs in building trailers but modifies them as desired and most practical to meet the specific needs and personal preferences of each purchaser.

In other words, Rogers Trailers are "tailored to each specific need" but built on a basis that utilizes economical, high production methods. Thus, purchasers obtain the utmost in performance and value.

Newest development is the Rogers Power-Lift 4-Feature Detachable Gooseneck Trailer — the most versatile and practical trailer yet developed.



The Detachable Gooseneck

ROGERS TRAILERS

ROGERS BROTHERS CORPORATION
135 Orchard St.
ALBION, PA.

ROGERS HEAVY DUTY Gooseneck Trailers

EXPERIENCE *builds 'em* PERFORMANCE *sells 'em* *Since 1915*

(Continued from page 6)

courts have a test case which could have wide ramifications. A member of the legislature has sued to stop a state agency from issuing revenue bonds which would be repaid from rentals paid by the state for the use of property built with bond issue proceeds. His suit claims the bonds would commit future legislators to appropriate fixed amounts regularly until bonds were retired.

Wanted: Up-to-date Data—Census Bureau and the Housing and Home Finance Agency will collaborate on a project aimed at providing a continuing, reliable inventory of U. S. housing between censuses. Census will provide tested techniques for classifying its data and for gathering other material.

Knotty Problem—North Carolina's Highway Commission has a report recommending that it give up control of the state's prison system. Biggest fault with prison road camps, the report says, is that "a dollar sign has been placed on the back of every prisoner, the main thought is to get full value from him on the roads."

THE COVER

Looking away from the recording tape of a Geiger counter is Prof. Rolf Eliassen, of the Department of Civil and Sanitary Engineering of M.I.T. He's this year's recipient of the George Westinghouse award for distinguished contributions to the teaching of engineering students.

The Geiger counter, incidentally, is part of an M.I.T. investigation into the removal of radioactive substances from water by conventional treatment methods.

The 39 year old professor, a native of Brooklyn, New York, will be the fifth recipient of the Westinghouse award, made each year by the American Society for Engineering Education (see also the news section of this issue. His career has been active enough for several engineers: A 1932 graduate of M.I.T., he worked for two consulting firms, was an associate professor (sanitary) at Illinois Institute of Technology, held a similar post at New York University, was consultant to the National Resources Planning Board in the early war years and rejoined M.I.T. in 1949.

In addition, he's been a travelling salesman; successively captain, major and lieutenant colonel, Corps of Engineers; head of the Department of Civil Engineering at the American University at Biarritz, France; a pretty good amateur tennis player; a music-lover (but no musician); has written some 40 papers and reports for publication; and carried on a considerable consulting practice.

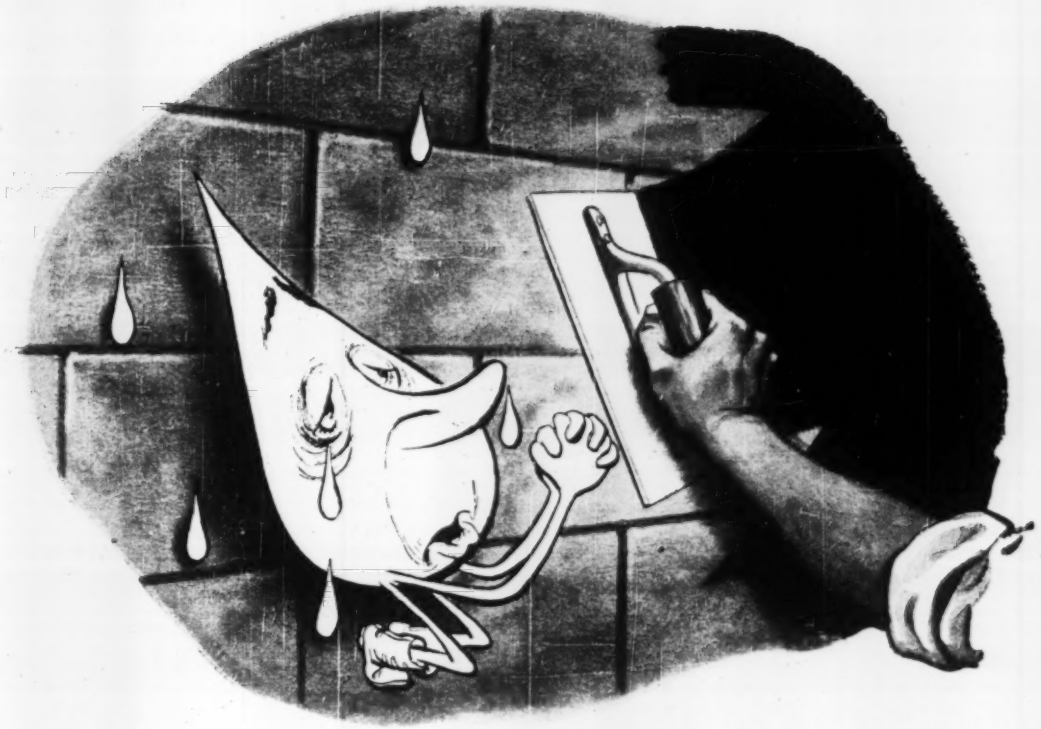

How to Humiliate Humidity...

There are few intruders more persistent than unwanted moisture. One of the best ways to bar the door against it is to specify Flintkote Trowel Mastic on the interior face of exterior walls.

Here is a list of specially formulated asphalts for the many different applications necessary in moisture control. Cutbacks and emulsions . . . mastics, semi-mastics and fluids . . . hot-applied, cold-applied . . . fibrated, non-fibrated . . . spray-, brush-, and trowel-applied . . . whatever the characteristics, you can be certain that when you specify Flintkote, you're getting high quality products *especially developed* for your needs.

No matter what the job . . . above grade, or below . . . inside or out . . . you get proven performance when you specify the Flintkote line. It's a really effective way to humiliate humidity.

FLINTKOTE PRODUCTS FOR PROTECTION AGAINST WATER AND DAMPNESS

ASPHALT PRIMERS • ASPHALT CUTBACK COATINGS
TROWEL MASTICS • SEMI-MASTICS • HYDRALT* EMULSION PROTECTIVE COATINGS • CAULKING COMPOUNDS • ASPHALT SATURATED MEMBRANE • SPANDREL CLOTH

Complete specifications and application data are available. Write for them today.

*Reg. U. S. Pat. Off.

THE FLINTKOTE COMPANY, *Industrial Products Division*
30 Rockefeller Plaza, New York 20, N. Y.
Atlanta • Boston • Chicago Heights • Detroit • Los Angeles
New Orleans • Washington • Toronto • Montreal

FLINTKOTE *Products for Industry*

BEAM - STRENGTH

Without beam strength—or, for that matter—without all of the strength factors listed opposite—no pipe laid 100 years ago in *city streets* would be in service today. But, in spite of the evolution of traffic from horse-drawn vehicles to heavy trucks and buses—and today's vast complexity of subway and underground utility services—cast iron gas and water mains, laid over a century ago, are serving in the streets of more than 30 cities in the United States and Canada. Such service records prove that cast iron pipe combines all the strength factors of long life with ample margins of safety. No pipe that is provably deficient in any of these strength factors should ever be laid in city streets. Cast Iron Pipe Research Association, Thos. F. Wolfe, Engineer, 122 So. Michigan Ave., Chicago 3.

CAST IRON PIPE

Strength factors of Long Life !

No pipe that is provably deficient in any of these strength factors should ever be laid in city streets

BEAM STRENGTH

When cast iron pipe is subjected to beam stress caused by soil settlement, or disturbance of soil by other utilities, or resting on an obstruction, tests prove that standard 6-inch cast iron pipe in 10-foot span sustains a load of 15,000 lbs.

CRUSHING STRENGTH

The ability of cast iron pipe to withstand external loads imposed by heavy fill and unusual traffic loads is proved by the Ring Compression Test. Standard 6-inch cast iron pipe withstands a crushing weight of more than 14,000 lbs. per foot.

SHOCK STRENGTH

The toughness of cast iron pipe which enables it to withstand impact and traffic shocks, as well as the hazards in handling, is demonstrated by the Impact Test. While under hydrostatic pressure and the heavy blows from a 50 pound hammer, standard 6-inch cast iron pipe does not crack until the hammer is dropped 6 times *on the same spot* from progressively increased heights of 6 inches.

BURSTING STRENGTH

In full length bursting tests standard 6-inch cast iron pipe withstands more than 2500 lbs. per square inch internal hydrostatic pressure, which proves ample ability to resist water-hammer or unusual working pressures.

CAST IRON

SERVES FOR CENTURIES

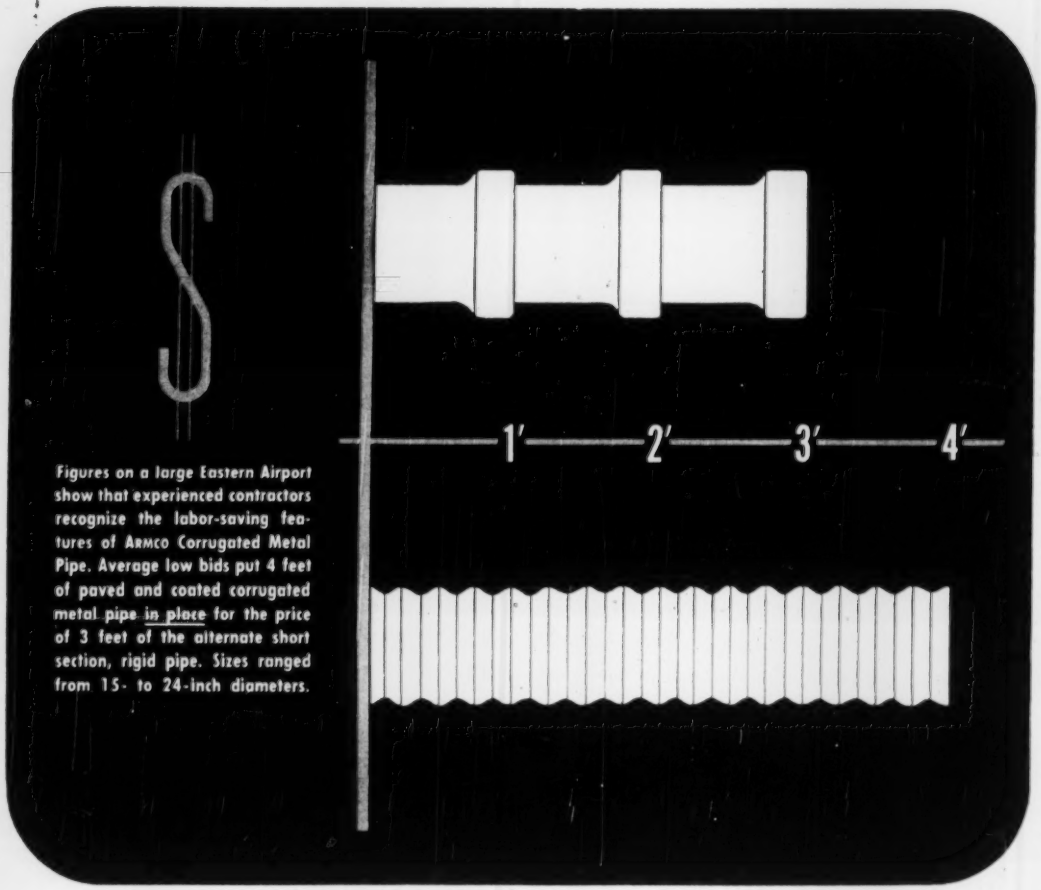

Figures on a large Eastern Airport show that experienced contractors recognize the labor-saving features of ARMCO Corrugated Metal Pipe. Average low bids put 4 feet of paved and coated corrugated metal pipe in place for the price of 3 feet of the alternate short section, rigid pipe. Sizes ranged from 15- to 24-inch diameters.

Make your bid dollar go 33⅓% farther

Contractors have found that a dollar goes farther when they figure bids with ARMCO Corrugated Metal Pipe. It means lower bids with adequate profits and puts you in a sound competitive position.

Experience shows that ARMCO Pipe saves money in many ways. Although amply strong it often weighs only one-tenth as much as more massive types. This means low handling and hauling costs. Job costs are low because unskilled labor quickly makes the installation. There is no breckage, no curing, no waste, no delay.

Individual sections of ARMCO Pipe or PIPE-ARCH are supplied in any length that can be hauled or handled. No large and expensive equipment is required for installation. A few men with a rope sling or a small A-frame can handle the largest structure. Trenches need only be wide enough for men to work since there are no bells or massive joints that require extra digging. Connections are made with simple band couplers. End finishing is easy and inexpensive with prefabricated ARMCO End Sections.

Bid low on that next contract with ARMCO Corrugated Metal Pipe. You will find it ideal for highway, railway, airport or municipal installations. Write for complete information. Armco Drainage & Metal Products, Inc., 1465 Curtis Street, Middletown, Ohio.

Export: The Armco International Corporation

ARMCO DRAINAGE STRUCTURES

THE CONSTRUCTION WEEK

TAXES TAKE THE ELEVATOR—House committee ok of a higher tax rate for businesses whose profits exceed $167,000 a year brings some ominous speculation from Washington. Pundits there see it as more than a political maneuver to make palatable at the White House the substantial revenue losses incurred by excise tax cuts. They call it Congress' first accession to the Fair Deal concept that big business should pay more of the government's expenses. Fair Dealers argue that federal spending is underwriting the boom; so, with spending and deficits rising, more of these government-invoked profits should be recovered for government. It's an argument with particular applicability to the construction business. For all business, it may be an indicator of what future Congresses may be willing to accept.

HOW'S YOUR CASH POSITION?—While the corporate tax boost will hit only "big" business if it becomes law, there's another angle to the tax bill which will affect business big and small. It's that Mills Plan again—the proposal to speed up corporate income tax payments as a means of disguising the deficit. (Companies would pay in the first six months after the close of a tax year what they've been paying in the first 12 months.) This, naturally, is no tax increase, but it's a squeeze on those whose cash position is narrow. Because many small companies pay last year's taxes with this year's profits, the Mills plan isn't over-popular. Even so, it may be accepted in the trading that will take place as the Senate gets to work on a tax bill. Numerous senators worry about what a corporate tax boost would do to venture capital. That, however, doesn't worry Fair Dealers. A shortage of private capital, as they see it, could be made up by government capital—through loans and government-backed capital banks. Federal capital, of course, would facilitate federal leadership and direction of business, influencing the shape of business growth and competition.

COLUMBIA RIVER DIVERSION—Californians, particularly state officials, are quick to deny that they had anything to do with prompting studies by the Bureau of Reclamation of diversion of Columbia River water to California (ENR June 25 p 25). The State Water Resources Division maintains that there is ample water in California for its needs—with, however, two provisos: That California rights to Colorado River water are firm and that facilities be constructed for diverting water from coastal rivers in northern California to the central valley.

The original Central Valley project plan developed by the state more than 20 years ago included a trans-mountain diversion from the north-coastal Trinity River to the Sacramento Valley. The federal government took over this plan when the state could not finance construction in depression years and this diversion was left out. The state now is drawing up a new statewide "California Water Plan" and special attention is being devoted in studies to use by mountain diversion of the more than 10,000,000 acre-ft per year of water wasted from north coast streams.

HOW ABOUT HOUSING?—Some Washington authorities think May will prove to have been the peak month of the 1950 housing boom. (May recorded 140,000 starts—an all-time, all-season record.) Whether May does or doesn't prove to be the peak, it's agreed that 1950 will break all records—with starts perhaps as many as 200,000 above last year's record of 1,025,000.

HOW'S BUSINESS?—Bureau of Contract Information, an agency of the surety companies, has two interesting indicators as to the current situation in the contracting business. One, backed by statistical evidence, is that surety losses are rising—percentagewise. The ratio of losses to earned premiums is going up, indicating that contractors are having increasing difficulty—for whatever reasons. The other, which can't now be backed up with statistical evidence, is that the volume of notes and bills in the over-due and slow-payment categories seems to be increasing. Evidence available to the bureau indicates that competition—about which contractors have been exclaiming for months—is cutting profit margins.

IT'S ONLY MONEY—The din of that legal battle over the Lustron Corp. apparently hasn't reached from federal court in Columbus, O., to the House Office Building at Washington. A bill has been introduced which would let RFC lend as much as $50,000,000 more to prefab producers and large-scale builders using on-site fabrication methods. Similar proposals in the past haven't done well on Capitol Hill. Too many Congressmen could remember what happened to most of RFC's original $50,000,000 prefab authorization. (It's causing all the noise at Columbus). Major aim of the bill, though, was to authorize chartering of private national mortgage corporations. (ENR May 25, p 25). Idea is that the new corporations would create a private market for FHA and VA paper, replacing the Federal National Mortgage Corp., whose functions have been curtailed.

Welded Design is the Key to Cutting Structural Weight and Cost

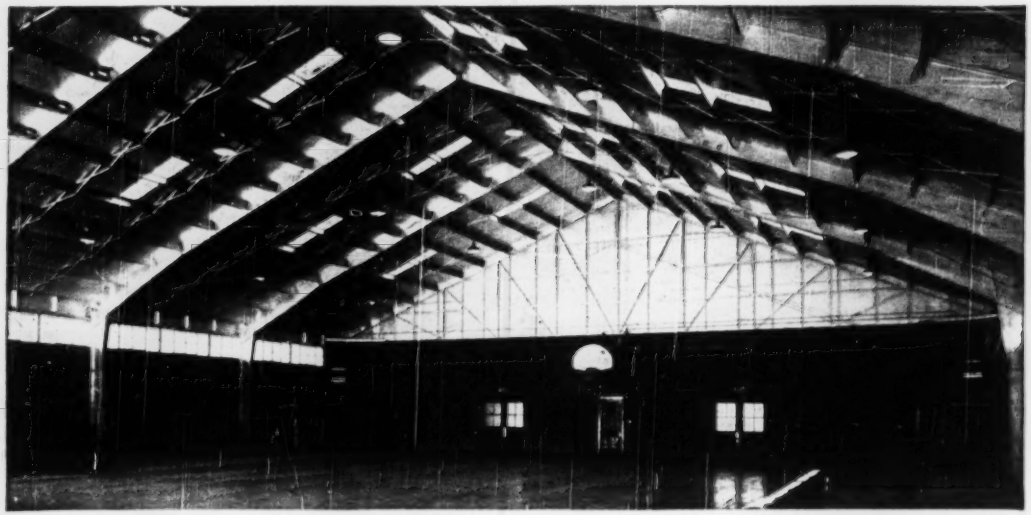

School gymnasium, 85' x 130', at Wright City, Oklahoma. Designed by David R. Graham, Tulsa, Oklahoma. Has clear, unobstructed view from everywhere. Note simple, compact roof construction.

By DAVID R. GRAHAM
Consulting Engineer
Tulsa, Oklahoma

THE limited budgets of small communities for gymnasiums, field houses and similar structures can be met simply through the use of arc welded construction. By designing the framework as a solid, continuous unit, it is possible to use lighter structural members, eliminate rivets, butt and corner plates and so cut steel requirements as much as 30%.

With welded design, the structural engineer can take full advantage of longer spans, greater ceiling clearance and less obstruction than possible with riveted or bolted construction. These benefits, of course, mean higher availability of useful space at lower cost. These buildings are simpler to light and easier to clean.

In the past, our work has been devoted to architectural engineering involving both riveted and welded designs and the decision on riveted or welded design was left up to the engineer. In recent years, however, it is significant to note that clients familiar with both types of structural design now specify welded construction.

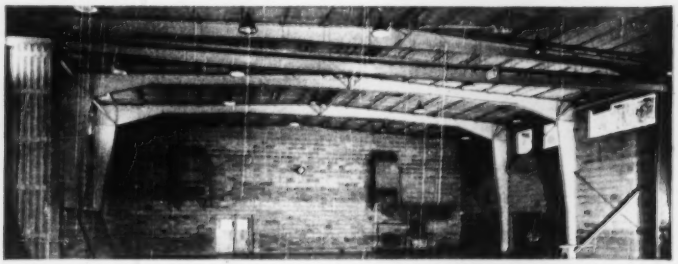

School gymnasium, 72' x 120', at Tulsa, Oklahoma. Has exceptional ceiling clearance made possible by welded design.

GET THE FACTS

Write for Studies in Structural Arc Welding
THE LINCOLN ELECTRIC COMPANY
Dept. 135, Cleveland 1, Ohio

Sales Offices and Field Service Shops in All Principal Cities

LINCOLN

CONSTRUCTION TRENDS

1 Distribution of firms and employment in contract construction

By size of firm, March 31, 1948

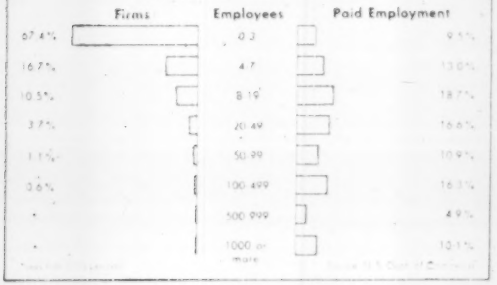

2 Per cent increase in number of firms in operation and in employment in contract construction

By size of firm, March 31, 1945 to March 31, 1948

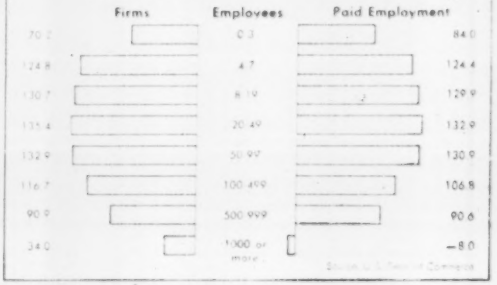

THE CONSTRUCTION BUSINESS GROWS

What's happened to the contract construction business in the booming postwar years is shown in the accompanying charts. Based on a study by the U. S. Department of Commerce, here is a preview of the overall make-up of the industry of a sort that won't be available until there's another Census of Construction.

The employment figures actually understate the size of the industry. The Commerce study is based largely on employment at the end of March of each of the postwar years, a date close to the seasonal low.

The employment figures are based on social security records compiled by the Bureau of Old Age and Survivors Insurance. These include only paid employees. But the Commerce Department adjusted the figures.

The 312,400 contract construction firms who are the employers include trade and subcontractors, plumbing, heating, electrical, painting, plastering as well as general and prime contractors. How many of the total are special-trade contractors is not known. But in 1939, when there were 215,050 contract construction firms, 81.9%, were special trade contractors, 0.9%, "heavy" contractors, 1.7%, "highway" contractors (included light waterworks and sewers), 13.8%, were building contractors of all sizes and 1.7%, were "builders."

So, assuming that the special trade or subcontractors still make up more than 80% of the number of firms, it is no surprise that more than 67% of all the 312,400 "contract construction" firms employ less than four.

On the other hand, the big construction firms do a major part of all construction work. A few big firms employ more than 10% of all construction workers.

Chart I shows the percentage distribution of construction firms and employment by size.

The second striking thing is the industry's amazing growth in the postwar years. True, in March, 1945, when the Commerce figures start, construction was still close to its wartime low. But in the next three years, the total number of contract construction firms grew 85%. This is up 52% from 1939. Employment in the three postwar years climbed 91%. The biggest growth came in the middle-sized firms. In this time, the growth in the number of firms in all industries was only 23%. Employment in all industries gained 8%.

Chart II shows the percentage growth of the industry, by size of firm.

How does construction compare with other business?

The Department's figures for 1948 show there were 3,960,000 operating businesses of all kinds. This includes companies in mining, manufacturing, transportation, trade, utilities, service businesses, and construction. Of these, construction accounted for 312,400. Total employment in all these firms was 33,600,000, an average of slightly less than 10 workers to a firm. Total paid employment in contract construction was slightly more than 2,000,000, or 15.5 workers per firm.

We have only a scattering of clues on development since 1948, which is as far as Commerce carried its study. But these clues indicate continuing growth. The total of operating businesses in contract construction, as reported more recently by the Department of Commerce, was 321,800 last September.

In short, the evidence indicates that the number of firms in the field is still growing, although at a much slower rate than 1946 and 1947. Certainly today's figures on contract awards and volume of activity point to continuing growth in heavy construction work.

And with the shift in homebuilding toward mass-housing, and the bright long-range outlook for other kinds of engineering construction, contractors in this field should continue to gain.

TODAY...

Just As You Wouldn't Use A Horse and Buggy

•

You Wouldn't Use An Old Model Air Compressor

•

When You Can Use The

SCHRAMM *Pneumatractor*

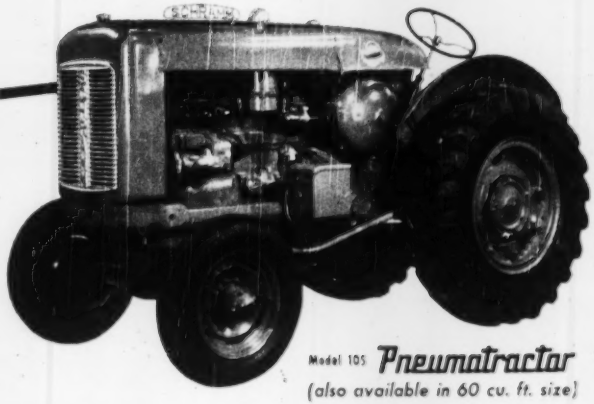

Model 105 *Pneumatractor*
(also available in 60 cu. ft. size)

The SCHRAMM *Pneumatractor* may very aptly be termed the "Newest of the New" —a self-propelled air compressor literally packed with far advanced features that put it in a class by itself. Its desirability over an old model air compressor can be likened to your preference for the modern automobile over the horse and buggy.

Here is why you should choose the SCHRAMM *Pneumatractor*. It can be easily transported . . . is strong, rugged, husky . . . and costs less than a separate tractor and separate compressor. Moreover, it is so flexible you can use it for an endless variety of compressed air jobs!

Going hand-and-hand with the *Pneumatractor* is the complete line of SCHRAMM auxiliary equipment also available . . . approved equipment which will enable you to do your job better.

Write today for Bulletin NEU-50B describing this most modern of air compressors and auxiliary equipment. In today's compressed air needs, you will find the *Pneumatractor* a "must".

SCHRAMM INC.

The Compressor People

WEST CHESTER • PENNSYLVANIA

Challenging Times for Concrete

In providing the Portland Cement Association with a great new research laboratory, the cement manufacturers of the country have exhibited a high order of industrial statesmanship. In a certain sense every research laboratory is an expression of dissatisfaction with things as they are and a symbol of confidence in what they can become. Despite great advance, concrete and its basic ingredient, cement, do not satisfy all hopes. Despite attainment of a high plateau of knowledge respecting concrete design and manufacture, many peaks holding unknown treasure beckon from the horizon. The cement manufacturers have pledged their support to realize these hopes and to increase this knowledge.

The new laboratory embodies a promise to the public of better concrete, of concrete applied in new and useful ways. By the same token, it ennobles the challenge to the research workers who will labor within its walls to give this promise substance.

There is no dearth of paths for the investigators to follow. By coincidence one of them was suggested in last week's issue only a week after the article describing the laboratory was published (ENR June 15, 1950, p. 32). It relates to the relative advantages of the "old fashioned" course cements and the finer ground cements of today. The Kansas highway department has a suspicion that the course ground product was discarded too precipitously when the advantages of high early strength furnished by finer grinding caught the country's imagination. Pavement made with both types of cement is being laid for comparison.

The question to be answered is: Are high early strength and durability incompatible characteristics in concrete? Also, is high early strength a deterrent to the best in ultimate strength? Generally a negative answer has been given to both questions. Yet, certain experience of recent years has shown that some pavements made with the course cements have continued to gain in strength and durability over a long period of time whereas the newer concretes which attained high strength at an early age have not become appreciably stronger and have shown poor durability with the passage of time. A possible conclusion is that we can accelerate the rate at which concrete hardens, but in so doing we may interfere with the slow process of crystal formation that gives concrete the quality that we know as durability.

Thus, cement itself offers one path of investigation. Another, with quite as revolutionary prospects, is offered by prestressed concrete. Here, finally, is a way to make a cement product that will take tension without cracking, one in which the entire cross section, not just the upper half, carries bending moment. So far, the expense of its manufacture seems to make prestressed concrete too expensive for some otherwise promising applications. What can research do to remove this obstacle?

These two paths of needed investigation are merely typical. There are many others: control of air entrainment; reduction of shrinkage; reduction of heat of hydration; lighter weights without strength impairment; more scientific selection and grading of aggregates; more efficient mixing; use of pozzolans, etc.

These are challenging times for concrete, and the appearance on the scene of a new and modern concrete laboratory is most propitious. Not only its own researches but those which its example stimulates can pave the way to new advances in the concrete art.

Highways and Night Clubs

The House Ways and Means Committee has decided to cut the tax on night club bills in half but has consistently refused to cut excise taxes on motor vehicles and parts. The tax on furs, another essential to high living, also is to be cut. But when it comes to cutting one of the federal taxes on highway users—to open the way for the states to add to their highway income without increasing the already heavy tax on road users—Congress takes no action. We surmise that the reason lies in the fact that cutting night club taxes has little effect on the federal income whereas a cut in automotive excise taxes would!

So if you find the highway to your favorite night club going to pieces, or overcrowded with traffic, don't blame the highway department. Just remember that putting up with those conditions is the price Congress asks you to pay for having your evening's pleasure cost you a little less!

Promising New Building Method

Casting floor slabs for the upper stories of a building at ground level and then sliding them up the columns by jacking, as was done on a two-story building at Trinity University (p. 38), is radical but promising. Not only did it prove economical and to the liking of the contractor on this first large scale use but additional opportunities for improving the technique were uncovered. Once the process is perfected, it should not be too great a step to prestress the concrete slabs and thus decrease their weight. Wider column spacing might also then be practicable. On the first job, the elimination of nearly all formwork and the need for only a small labor force were two advantages of moment. It is good to see new methods tried, particularly if they offer a possibility of cost saving.

ENGINEERING NEWS-RECORD

JUNE 29, 1950 VOL. 144 NO. 26

NLRB cases define standing of construction disputes

Board continues to make policy and reverse itself after three years under Taft-Hartley — But recent decisions throw some light on jurisdiction problem

Joseph Gambatese
Washington Staff

Where does construction stand under Taft-Hartley?

It's evident, this week, that not even the National Labor Relations Board knows for certain.

After three years, it's still making new policy decisions pertaining to construction.

Already it has reversed itself on some points.

And you can be sure that there'll be more switches as well as more new policy.

• **Why**—There are several reasons for this. Before Taft-Hartley, NLRB hadn't touched construction.

Now it faces a division of opinion on what the law means and how it should be applied. The split exists not only between the board and its independent general counsel, Robert N. Denham. It exists within NLRB itself.

So you can expect that rulings will change with experience, as courts express themselves more fully, as personnel changes take place within the five-member board and in the general counsel's office. One day, the law may change, also.

• **What's illegal?**—There's considerable dispute at NLRB on what acts are violations of the law. Whether certain union activity is or is not a secondary boycott; whether mass lists or certain types of picketing are coercive, and on similar knotty points.

But sharper—and perhaps more important—is the division on whether to exercise jurisdiction. Taft-Hartley is unreal to those over whom NLRB exercises no jurisdiction. Neither builder, union nor worker has any protection. None has any rights. Anything goes.

Thus, NLRB made news for construction last week when it handed down some significant decisions on jurisdiction. Adding last week's decisions to earlier rulings, this is construction's current situation regarding Taft-Hartley:

NLRB will take jurisdiction in such cases as these:

Contractors' association: When it is party to a labor contract, an association as well as a union is subject to the act. (Citation: General Contracting Employers' Assn., Buffalo, N. Y.).

Highway construction: NLRB will exercise jurisdiction over contractors engaged in construction, maintenance or repair of U. S. highways (Strong Co., Springville, Utah, ENR Nov. 3, 1949, p 15) even though it has declined jurisdiction over some local suppliers of highway construction companies. (Brewer and Brewer's Sons, Inc., Chillicothe, O.).

Prefabrication: Large manufacturers of prefab housing are under NLRB jurisdiction in labor disputes. (Lassen & Hodgson, Kansas City, Mo.).

Equipment manufacturing: A building trades union's dispute with the maker of equipment being installed in a construction project will be handled. (Grumman Co., Denver).

Dams—Disputes on large dams which have a major impact on interstate commerce will be handled. (Ozark Dam Constructors, Bull Shoals, Ark.).

Atomic construction: Disputes will be handled, having a substantial effect on commerce. (Atkinson-Jones, Richland, Wash.).

NLRB won't take jurisdiction in such cases as these:

Individual contractor: (See first case above, related to this) If he is not a member of an association, and his operations are largely local, NLRB won't take jurisdiction. (Straubinger Construction Co., Buffalo, N. Y.).

Local project: If a labor dispute involves a project of local character, it won't be handled, even though the contractor's whole operation has a substantial effect on commerce. (West Virginia Electric Corp., Fairmont).

Secondary boycott: A dispute involving a secondary boycott won't be handled, even though the contractor might do more than $100,000 worth of business (dollar value is sometimes important in determining the local nature of a contracting business) some of it for manufacturing firms directly in interstate commerce.

NLRB to hear vote pleas

National Labor Relations Board struck hard this week at the "no elections" policy of its independent general counsel, Robert N. Denham.

The board ruled that it would hold hearings on the petitions for representation elections filed in Olean, N. Y., Knoxville, Tenn., and Baltimore. All petitions had been filed by the M.E. Plumbers and Steamfitters Union. Denham, in line with his policy, rejected the petitions. The union appealed, and NLRB has ordered hearings held. The action does not commit NLRB to hold the elections.

With the decision, Denham announced he would ask the hearings be held by staff trial examiners rather than by regional directors, who are under his jurisdiction and committed to his viewpoint. Principal issue will be whether the bargaining unit sought by the plumbers union is an appropriate one. A union shop is sought at Olean. In Knoxville and Baltimore, bargaining elections are asked.

Dean Westergaard dies

Harald M. Westergaard, Gordon McKay professor of civil engineering and former dean of the Harvard Graduate School of Engineering, died at Cambridge, Mass., June 22. He was 61 years old. A native of Denmark, his U. S. career began at the University of Illinois in 1916. He became professor in 1927, continuing until 1936, when he joined the Harvard faculty, becoming dean a year later.

In 1929-30, he was on leave from Illinois for technical studies on Hoover Dam for the Reclamation Bureau. He also served the Bureau of Public Roads as special analyst and senior mathematician on slab-design problems. He was also consulting structural engineer for the Bureau of Yards and Docks.

He authored many technical papers, mostly on structural mechanics and the theory of elasticity. An authority on the elasticity of structural materials, he was noted in recent years for mathematical solutions of airport and building slab-design problems.

another possible consideration in determining jurisdiction—(Pettus Banister Co., Anniston, Ala.).

Residential construction: Generally, this is local and won't be considered even though it might involve a secondary boycott. (Denver Building and Construction Trades Council).

Construction supply dealers: Local supply dealers won't be considered under jurisdiction. (Texas Construction Material Co. and Makins Sand & Gravel Co.).

Drive-in theater: Won't be considered, being a local project, despite $80,000 cost and purchase of supplies in interstate commerce. (Petrodis & Dyer, Pittsburgh).

Jurisdictional dispute: Even though a labor dispute involves a union jurisdictional dispute—a special Taft-Hartley target—jurisdiction won't be taken. (West Virginia Electric Corp., Fairmont).

Yes and no: In the Buffalo Contractors' Assn. case, NLRB took jurisdiction unanimously where the association was involved. Illegal closed shop charges, filed against the association, three contractors and the AFL Hod-Carriers union, will soon go to hearing.

But, by a 3-2 vote, NLRB refused to include Strasbinger in the same case because Strasbinger was not a member of the association. Chairman Herzog joined Member Reynolds in a dissent. He thought Strasbinger, who was doing more than $600,000 a year in business, was big enough to warrant taking jurisdiction. That gives some idea of the board's ideas on how much a contractor's total volume should enter into the decision to take or refuse jurisdiction.

Another angle to the Buffalo case is this: Reynolds, who dissented on Strasbinger, went along with the majority in the dismissal of charges in this case against a fifth contractor—Anthony Sumner, a small masonry contractor. He figured Sumner's operations were so small as to qualify under the "de minimis" doctrine (courts aren't concerned with trifles). Reynolds believes that NLRB should reject jurisdiction only in cases involving this doctrine.

• **Standards but not rules**—There are standards for determining whether a job affects commerce and thus is subject to Taft-Hartley. But there are no exact rules for measuring what a dispute would have a "substantial" effect on commerce. So members must use their own judgment as to whether or not a job comes under Taft-Hartley jurisdiction.

The board, for instance, has had a rule of considering all a contractor's operations in determining the impact on commerce of a dispute involving him. But consider the West Virginia Electric case.

With Herzog and Reynolds dissenting, NLRB refused jurisdiction of a union jurisdictional dispute because the job was only a $4,545 electrical contract on an elementary school. In this case, the contractor does $100,000 yearly, 25% of it outside West Virginia. In his dissent, Herzog urged the board to stand by its "previously well settled policy" of considering a contractor's operations in the long run as a whole.

• **The politics**—On NLRB today, three pro-labor members are in control. Thus, Herzog usually has the choice of joining them in a decision or of dissenting, with Reynolds.

This wasn't the case until last winter. Then, Paul L. Styles, a former AFL official from Alabama, replaced J. Copeland Gray on NLRB. Gray, who came from management, usually sided with Reynolds, while members Houston and Murdock generally voted pro-labor. This normally left Herzog to cast the deciding vote on most contested issues. That's no longer the case, with the Houston-Murdock-Styles line-up.

So Herzog's losing his effectiveness as chairman. This is another one of his reasons for wanting to quit when his term finally expires in August.

—

Kiley to succeed Buford as Milwaukee road head

John P. Kiley, a Chicago civil engineer, will become president of the Chicago, Milwaukee, St. Paul and Pacific railroad Aug. 31 when Charles H. Buford retires. Kiley now is vice-president in charge of operations.

Kiley, who had worked for the road as a rodman during his college vacations, joined the staff in 1913 after his graduation from Villanova College, Villanova, Pa., as a civil engineer.

He was made assistant to the president in 1946, with headquarters in Seattle. Wash. Later, he was elected vice president and returned to Chicago in 1948 to resume operations.

Buford started with the railroad in 1907 after being graduated from the University of Arkansas as a civil engineer.

He became general manager of the lines west in 1927. From 1939 to 1946, he served as vice president operating and maintenance department, of the Association of American Railroads, Washington, D. C. He returned to the Milwaukee road as executive vice-president and was elected president in May, 1947.

Buford will remain as a consultant with the road. Board Chairman Leo T. Crowley announced.

PHA lends $100 million for N. Y. C. housing

Largest transaction will finance more than 7,700 units in five projects—First to be ready in one year

New York City's housing business with the federal government is in the $100 million class.

There were only a few less dollars than that involved in a contract between the two last week. Its object: Construction funds for low-rent homes for 7,728 families. The federal loan: $99,464,000. Target date for completion of the first units: Summer of 1951. The dwellings are to be built by the city's housing authority.

Five separate projects are to be undertaken under last week's loan. They represent a little less than one-third of the 24,000 units for which the city has obtained a federal ok. (ENR June 8, p. 28). They're even a smaller proportion of the authority's 8-year program. That calls for 80,000 units at a cost of "close to a billion dollars." The current split-up of expenses on this long-term program calls for $700 million of it to be federal aid, $20,000,000 of it to be city financed and the remainder state aid.

• **Homes for half a million:** There'll be half a million persons living in city-built homes after eight more years, according to Gen. Thomas E. Farrell, authority chairman. Right now, the authority has 25 projects under construction—"the minimum load." They'll cost $300 million.

Under the terms of the National Housing Act of 1949, the Public Housing Administration guarantees up to 90% of development costs and offers a maximum annual rent subsidy of $75. That'll bring the authority $4,475,850 yearly under last week's contract. Tenants will let the new units rent at $5 to $9 monthly per room to persons whose annual income is below $2,000 for two persons, $2,400 for three or four persons, and $2,850 for five or more persons. The rents are higher than they were in pre-war city-built homes, but the authority says they're better homes, too.

• **Bond sales soon:** Sale of the bonds whence the federal loan will be repaid probably will begin early next year. The first such bonds under the National Housing Act are scheduled to be offered in September. Early issues probably will be watched closely by housing officials throughout the country for an indication of the interest costs they'll incur. With broad federal guarantees and subsidies, authority housing bonds are expected to provide some pretty inexpensive financing for the vast program.

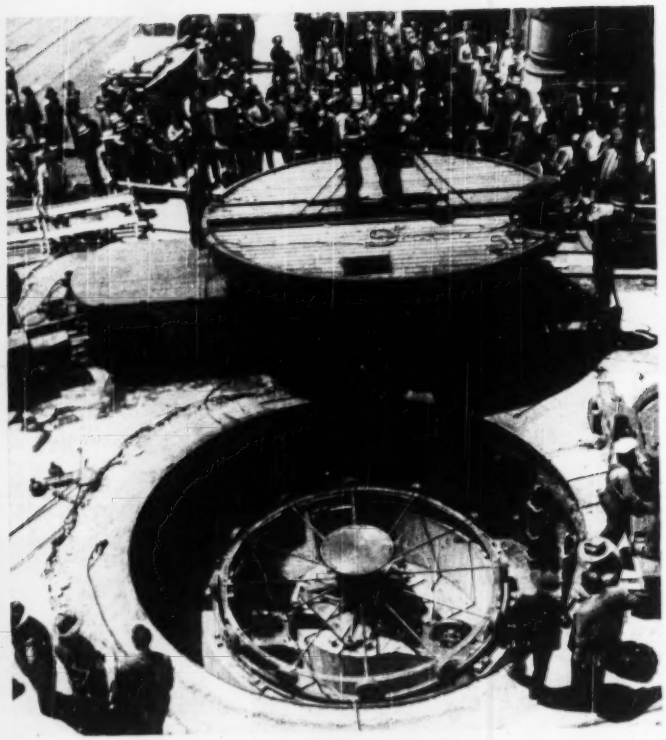

SO THAT'S HOW THEY DO IT—San Francisco sidewalk engineers have a sentimental —as well as professional—interest in this job. They're watching a crane lower a new turntable for one of the city's cable car lines. A new center anchorage and rail pier of reinforced concrete has been poured and the pit wall resurfaced.

Job prospects good for engineers

Today's college-bound youth need not fear for its job prospects in engineering. Technical graduates this year are getting jobs or offers in abundant supply despite their numbers. And there's a plainly predictable shortage of engineers coming in four years.

Startling is that may be, it was asserted last week at Seattle, before the 58th annual meeting of the American Society for Engineering Education.

Four out of five engineering graduates in 1950's record-breaking class had either received jobs or job offers three weeks after graduation, according to a survey by the Manpower Committee of the Engineers Joint Council. Covering 117 engineering schools, the survey found that 62.5% were placed by June 15. An estimated 20% more had offers. A similar survey last year showed 62% of the graduates placed by July 1—95% by November.

• **Warning: Smaller classes.** Fewer entering freshmen are anticipated next fall in engineering classes—partly because of reports that the field is overcrowded. As a result, warned M. M. Boring, of General Electric Co., chairman of EJC's committee, "we very clearly will face a serious shortage of engineering graduates four years from now." The shortage might become acute as early as 1952, he added.

Morris L. Cooke, chairman of the Water Resources Policy Commission and a technical-economic specialist assigned many for the last five national administrations, urged engineers to forget their distaste for government and politics. He warned that the profession would be unable to play its full role in a developing world if its members do not "abandon what is now almost our universal hypercritical attitude toward government."

Members were told of the completion of the first phase of ASEE's three-point program to further engineering education. A manual entitled "Effective Teaching" has been published and 10,000 copies of it sold in three months. Elsewhere in that program, a committee has completed a preliminary study of improved teaching methods. Teaching aids are being reviewed with a view toward publication.

Three awards for advancement of engineering education went to Fred B. Seely, Rolf Eliassen and Harry P. Hammond. Seely, chairman of the department of Theoretical and Applied Mechanics, University of Illinois, was awarded the Lamme Medal. Dr. Eliassen, professor of Civil and Sanitary Engineering, Massachusetts Institute of Technology, won the Westinghouse Award (see p 12). Dean Hammond, of Pennsylvania State College, won the James H. McGraw Award. (The latter was presented for the first time this year by the McGraw-Hill Book Company for distinguished contributions to technical education at the sub-collegiate level.)

• **Wanted: Broader training.** Dean Thorndike Saville, of New York University, retiring president of the society, criticized "compartmentalized" education, with two-year technical institutes for draftsmen, surveyors and similar skills. He urged that state educational systems be induced to integrate pre-engineering aspects of the technical institutes and junior and community colleges into a broad program of engineering education. He urged also that college effort be concentrated on a fundamental background in engineering science, not upon mastery of a specialty.

Dean E. M. Dixon, of Iowa State University, was elected president to replace Dean Saville. E. E. Ginter, of Illinois Institute of Technology, and Gerald Rosselot, of Georgia Institute of Technology, were elected vice-presidents. C. L. Skelley, of the McMillan Publishing Co., is treasurer.

Dr. Rosselot was elected chairman of the Engineering College Research Council, which met during the ASEE convention. A. G. Conrad, of Yale University, was elected vice-chairman. Ralph A. Morgan, University of Florida; Kurt L. Wendt, University of Wisconsin, and Eric Walker, Pennsylvania State College, are directors.

Carpenters reject pact

San Francisco Bay area carpenters have voted down a three-year contract their negotiators worked out for them. ENR June 22, p 30). Voting against the new contract was 5,500 to 3,200. The contract called for a 10¢ cent wage boost this year and increases of 5 cents in 1951 and 1952. Nineteen unions and eight employer groups had signed it.

CONSTRUCTION BUSINESS

Lumber price rise tapering off

Price increases of $2-$15 a thousand on Douglas fir and pine hit eight major cities early in June. Prices (fob city) were steady throughout the month in five coastal cities. The June increases may be the topping out of the current advance, according to representatives of large mills and to reports from pricing centers.

Prices are expected to hold near present levels in Chicago, Cleveland, New York, Baltimore and Seattle. First signs of a leveling off appeared about three weeks ago (See ENR June 15, page 27).

• **Current prices**—Prices affected by the early June increases compare with a month ago as follows (fir 2x4s, $ per thousand, No. 2 or better, fob city)—Baltimore $107.50, up $5.50; Chicago $111, up $3.50; Cincinnati (estimate) $96, up $2.50; Cleveland (estimate) $112, up $5; Denver $125, up $7; Kansas City $127.50, up $13.50; Minneapolis, $120, up $10; Pittsburgh $97.50, up $2.50; St. Louis $124, up $4.50.

Fir prices held steady through June in Boston, $94; Los Angeles, $101; New York, $130; Seattle (mill) $75; Philadelphia, $115.

Firm price quotations are not available in Cleveland or Cincinnati. Cleveland sellers point out that the mills refuse to quote except for spot delivery and when lumber is available to fill the order.

• **Outlook**—Lumber demand at the mills is very strong, but spokesmen of large companies say they see no further price increases. Right now, the mills are just able to take care of current order volume. Dealers are not ordering far ahead, apparently fearing to commit themselves to any more high-priced inventories than necessary.

At the local level also, prices are thought to be stabilizing in some cities. In Baltimore, there are slight shortages of a few items of Douglas fir but nothing serious; prices are believed to have reached their peak. In New York, lumber is not quite so short as it was, but deliveries are still slow; prices may continue to hold around the June 1 level. In Seattle, supply is tight, but prices have been level for almost two months.

Inland, the supply is more critical and prices showed signs of going up last week in some cities. Kansas City prices were still in an uptrend last week, but had lately shown signs of leveling off. In Minneapolis, supply is tight, with no relief in sight. Chicago supply is improving, and prices are thought to be leveling off. In Cleveland supply is very short, but it may improve if shipments keep coming in as they have lately.

Labor supply notes

• **Seattle**—Labor is in good supply in Seattle except for a shortage of bricklayers.

• **Baltimore**—The skilled labor shortage is growing in Baltimore. Bricklayers, electricians, plumbers are at a premium. Contractors are advertising for bricklayers at $2 a day over the basic rate.

Hoisting engineers are scarce. It is anticipated they will become scarcer as Chesapeake Bay Bridge construction advances.

• **Chicago**—The Chicago carpenters' 5-cent wage rise signed negotiated last month is not official yet. The workers are voting on whether to take the 5 cents hourly in cash or welfare.

Labor supply continues adequate in Chicago.

• **Los Angeles**—There are reports of widespread "pirating" of labor by premium wage offers, and materials price bonuses paid suppliers in Los Angeles.

The Home Building Institute in Los Angeles has voted to put pressure on any member who pays bonuses to materials suppliers or who hires other contractors' workers by offering premium wages.

• **St. Louis**—Building permits hit a new high last month and are expected to increase the next few months, creating some skilled labor shortage.

But so far there is no strain on builders, out-of-town labor is filling gaps on larger jobs, no materials price premiums are reported, and bidding is competitive and free of escalator clauses except as to material prices in some cases.

Middle West prices up

Prices of brick and some other materials increased in the Middle Western area during June, while they were steady elsewhere. Lumber prices are also especially strong in Midwestern cities.

Price increases on common brick are: Cincinnati, up 25 cents a thousand to $32.50; Cleveland, up $1.50 to $30; Detroit, up $1 to $22.50; and Pittsburgh, up $2 to $28. These price increases are attributed to wage increases granted clay workers throughout the north central portions of the U. S. in the past two months.

Crushed stone is up 25 cents a ton in Detroit and 5 cents in Kansas City. Concrete block is up ½ cent a block in Cincinnati, 1 cent in Detroit, and ¼ cent in Kansas City.

Paving asphalt is up $1.50 a ton to $21.50 in Cincinnati. Cutback asphalt is up a cent a gal to 9½ cents in Cincinnati and up 1.1 cents a gal to 9.76 cents in Detroit. Road oil is up 2½ cents a gal to 6.1 cents in Kansas City and up ½ cent a gal to 9.7 cents in Detroit.

Cement output, shipments a record last month

May cement shipments and production by mills set new records, thus beginning to reflect this year's record construction volume.

Shipments for May total a record 22.8 million barrels, 17½% above the same month last year. Only months the mills ever shipped more than this were August and September of last year.

Production for May was 20 million barrels, 7% higher than last month and in all time record output for one month.

Mill shipments earlier this year ran only 3% over last year, despite record construction volume put in place. Department of Commerce analysts think dealers supplied the extra high demand by drawing down on their stocks. But there are no figures on dealer cement stocks to prove this.

Cost outlook improved by federal budget change

The federal budget may be almost balanced in fiscal 1951, which starts next month. And a balanced federal budget means there is little chance of inflation.

This means that materials producers are more likely to hold prices down, and labor leaders are more willing to settle long-term wage contracts.

Budget balance is not the most important influence on the construction cost outlook, but it is a factor. An inflation fear would make producers more apt to raise prices and labor leaders more aggressive. The way it looked this spring, a big government deficit was in the offing. Some economy-minded Congressmen and others voiced their fears of an impending price rise, unless the budget came closer to balance.

Now the fiscal 1951 cash deficit is seen as only a half billion dollars, compared with earlier Budget Bureau forecasts of $2.7 billion.

BIDS AND BIDDERS

(Major project news received after Construction Reports, page 76, went to press.)

Apartments—Albert P. Dicker & Louis Gregory, Washington, D. C., plan to construct 2,500 unit brick garden-type apartment project with shopping center, theater, recreation center, tennis courts and swimming pool on 181 acre site at Indian Head Rd. and Livingston Rd., Upper Marlboro, Md., 2.8 miles south of D. C. line, to cost between $17,000,000 and $20,000,000.

Dwellings—Chocolate Bayou Estates, Houston, Tex., plans 2,500 dwellings for Negroes on 530 acre tract near Holmes Rd. for $17,500,000. Knostman & Webster are architects; Robert Atkinson is consulting engineer.

Laboratory—Atomic Energy Commission received low bid on 2-story, basement, chemistry laboratory building in Los Alamos, N. M., from Utah Construction Co. and C. H. Leavell & Co., Ltd., El Paso, Tex., at $11,209,290.

Military installations—Garland Construction Co., Bellingham, Wash., submitted low bid of $8,835,000 to U.S. Engineers for constructing officers', NCO's and airmen's quarters; central heat and power plant; operations building; warehouse and cold storage; vehicle warm storage; mess hall; recreation building; dispensary and administration building; POL station storage; outside utilities and roads at Capes Romanzof, Prince of Wales and Lisburne, Alaska.

Office building—Turner Construction Co., New York, N. Y., was awarded contract for 32-story addition to the Chrysler Building, Lexington Ave. and 42nd St., New York, by the W. P. Chrysler Building Corp. for $9,000,000. Reinhard, Hofmeister & Walquist are the architects, Guy B. Panero, consulting engineer, and Edwards & Hjorth, structural engineers.

Hotel—Sheraton Hotel System, Ernest F. Henderson, pres. will build a 600-rm. hotel in Dallas, for $9,000,000.

Housing—Newark, N. J., Public Housing plans constructing 730 apartments, three and eight stories high, in the South End Project, Dayton St. at the Elizabeth-Newark line, for $8,637,000.

Waterworks—Dallas, Tex., voted $7,800,000 bonds for waterworks expansion. J. T. Conroy is Public Works engineer for the project.

Turnpike—D. W. Winkleman, Inc., Syracuse, N. Y., was awarded contract by the Pennsylvania Turnpike Comm. for constructing 3.78-mi. and 4.99-mi. extensions of Turnpike in Lawrence and Beaver Counties for the sum of $4,083,986.68.

Housing—Hoboken, N. J., Public Housing Authority plans to construct 598-unit housing project for $7,000,000.

Hospital—U.S. Public Buildings Administration awarded contract for 6-story, basement addition to U. S. Marine Hospital, San Francisco, Calif.; to Robert E. McKee, Los Angeles, for $3,786,000.

Hotel—Adolphus Hotel, Dallas, Tex., plans a 20-to 22-story, 520-room addition to cost $5,500,000. Wyatt C. Hedrick, Dallas, is consulting engineer.

Housing—Jersey City, N. J., Housing Authority plans to construct in the Greenville Section a $5,250,000, 500-unit housing project. Kelly & Gruzen, New York, N. Y., are architects. Plans also 60 unit housing on Bright St. to cost $600,000 and six 10-story buildings with 462 units on six acres on Montgomery St. to cost $5,000,000. Christian H. Ziegler, Jersey City, is architect.

School—Muscogee Co., Ga., voted bonds for school improvements to cost $4,250,000.

Highways—Included in the letting of 18 New York State Highway projects were the 0.86-mile elevated section of the Major Deegan Expressway, Bronx Co., for $4,979,447 to Johnson, Drake & Piper, Inc., of New York, and the 0.78-mile Cross Bronx Expressway Highbridge Interchange, New York Co., for $3,163,476 to Poirier & McLane Corp., New York.

Factory—Westvaco Chemical Corp., New York, N. Y., Division of Food Machinery & Chemical Corp. of San Jose, Calif., awarded contract for $5,500,000 Lawrence, Kan., chemical factory to Bechtel Corp., San Francisco.

Housing—Perth Amboy, N. J., Public Housing will construct 252 unit housing for $3,500,000.

Buildings—U. S. Atomic Energy Commission, Los Alamos, N. M., received low bid on 31 reinforced concrete buildings and facilities for $2,062,500 from R. J. Daum, Albuquerque.

COSTS AND VOLUME

ENR INDEX NUMBERS

Index	Base	1950	1949	1926
Construction Cost	June '39	566.45	243.45	
Building Cost	June '39	372.96	261.61	
Volume	May '39	404	266	

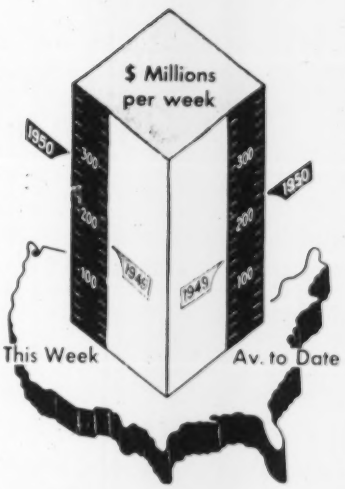

Activity This Week

As reported to ENR (in millions of dollars)

Amount of contracts let

	Week of June 29 1950	Cumulative 1950 (26 wks.)	Cumulative 1949 (26 wks.)	% change
Federal	$21.2	$214.8	$156.1	+38
State & Mun.	96.0	1,714.4	1,492.4	+15
Total Public	$110.2	$2,439.2	$2,047.5	+19
Total Private	117.3	3,224.4	1,892.5	+71
U. S. Total	$227.6	$5,663.1	$3,940.0	+44

Contracts by type of work

	This Week	Cumulative 1950 (26 wks.)	Cumulative 1949 (26 wks.)	% change
Waterworks	$1.4	$118.5	$57.2	+106
Sewerage	6.0	128.0	129.7	-1
Bridges	7.9	192.5	173.6	+11
Highways	42.9	817.7	400.9	+104
Earthwork				
Waterways	9.5	236.7	308.6	-23
Buildings				
Public	27.1	524.5	662.9	-21
House, pub	3.1	118.1	261.3	-55
House, pri	108.2	1,906.8	858.0	+122
Industrial	28.0	529.1	309.3	+71
Commercial	25.8	461.6	295.0	+56
Unclassified	21.8	478.1	344.9	+39

NOTE: Miscellaneous size projects included are: Waterworks and waterways projects, $58,000; other public works, $58,000; industrial buildings, $58,000; other buildings, $2,240,000.

New capital for construction

	1950 (26 wks.)	Cumulative 1949 (26 wks.)	% change
Corporate Securities	$1,458.3	$1,277.9	12
State & Mun. Bonds	1,204.8	1,282.9	-6
Bank Financing	1,000.0	1,000.0	0
Insurance	729.1	1,116.1	-35
Total Capital	$4,392.1	$4,676.7	-6

Western road officials discuss truck limits

Reno meeting hears committee report and trucker's recommendations on size and weight limitations

Truck size and weight limitations highlighted sessions of the Western Association of State Highway Officials at Reno, Nevada, June 12-15. Recommended limitations were presented by a representative of the trucking industry as well as by a committee of the association. A comparison (see table) shows marked agreement but differences are significant—particularly those regarding maximum height and weight.

The group includes highway officials from the 11 westernmost states, Texas, Alaska and Hawaii, and the Bureau of Public Roads. It was WASHO's 29th annual conference.

The trucker's viewpoint was presented to the group by John L. Springer, managing director and president, of Western Highway Institute. WHI is a research group with trucker membership in the 11 western states and Alaska. Springer said that, as far as he knew, his address was the first time a representative of the motor carrier industry had appeared before that group.

• **Joint committee possible**—G. S. Paxson, Oregon bridge engineer and chairman of the WASHO committee, presented its report. Both speakers referred to the possible organization of a joint committee to study size and weight limitations composed of highway officials and trucker members. Paxson pointed to the need for economic data, particularly as regards truck operation, so engineers can balance economy of operation against the added cost of constructing, operating and maintaining facilities necessary to accommodate heavier loads than are now carried under applicable state restrictions.

The truck size and weight limitation recommendations are an effort to achieve a greater degree of uniformity among states. The WASHO group first adopted standards in 1958. The American Association of State Highway Officials did likewise in 1946. Main difference between WASHO and AASHO standards are in height, length of truck-trailer combinations and axle-group limitations. Here also is where the trucker recommendations differ from those established by AASHO and WASHO.

As to height, the truckers want a 13-ft 6-in. limit as opposed to the AASHO limit one foot less. The WASHO limit was 13 ft 6 in. in 1958, but the present committee recommended against exceeding 12 ft 6 in. until highway structures more universally permit the increased height (national design standards call for a 14-ft clearance and this will not safely pass 13-ft 6-in. vehicles).

Length is another major point of argument. AASHO limits truck-trailer combinations to 50 ft (all but one of the eastern states restrict length to 50 ft or less) and WASHO allows 60 ft (permitted in all but two WASHO states). However, the truckers want a 65-ft limit, as permitted by four western states.

• **Differ on weights**—The complex problem of weight limitations on axle groups is another point of difference. Truckers represented by the WHI are seeking a slightly more liberal limitation on truck weights, by axle groups, than highway officials are anxious to concede to them.

Both the truckers, as represented by Springer, and WASHO, as evidenced in a resolution, called for stricter enforcement of existing laws limiting truck weights.

Other conference speakers included WASHO President W. E. Holcomb, Nevada State Highway engineer; Hal H. Hale, AASHO executive secretary; A. N. Carter, AGC highway division manager; Louis A. Woodward, Jack Ambrosen Photogrammetric Engineers, and George M. Williams, western headquarters, Bureau of Public Roads.

New officers are W. E. Anderson, chief engineer, Utah Highway Commission, president; A. M. Nash, district engineer in California, vice president; and E. A. Elliott, district engineer for the U. S. Bureau of Public Roads in Texas, secretary-treasurer. Directors are W. A. Bugge, Washington; P. G. Poore, Montana; and Mark Watrous, Colorado.

TRUCK SIZE AND WEIGHT LIMITATIONS

	Recommended by WASHO Committee	Western Highway Institute
Width:		
Body	96 in.	96 in.
Wheels	*102 in.	102 in.
Height:	12 ft 6 in.	13 ft 6 in.
Length:		
Single units	35 ft	35 ft
Combined units	60 ft	65 ft
Truck Speed:		
Maximum	45 mph	
Minimum	no unnecessarily slow operation	
Weight:		
Single axle	18,000 lb	18,000 lb
Tandem axles	32,000 lb	over 32,000 to 46,400 lb according to spacing from 4 to 18 ft
Total load	73,280 lb	76,800 lb

* As soon as structures permit increased width

Pollution control group established by Kentucky

Stream cleanup in Kentucky was accelerated last week when legislation became effective that establishes a state water pollution control commission.

The new law resulted from Kentucky's participation in the Ohio River Valley Water Sanitation Compact, which pledges signatories to enact suitable legislation for promotion of basin-wide pollution control.

Kentucky's new commission is empowered to establish quality standards for water according to use. It may issue orders requiring abatement of pollution or adoption of remedial measures to curb it.

Anyone now discharging wastes will be required to obtain a permit to continue doing so. Such permits may be conditioned. No new discharges will be legal without commission approval, nor will changes in existing discharges be legal without approval.

The new commission will be under the state health department. Members of its six-man board will include Dr. Bruce Underwood, health commissioner; Henry Ward, Conservation Department commissioner; A. E. Funk, attorney general; Earl Wallace, fish and game director, and two lawyers, one to represent industry, the other municipalities. F. Clarke Diggin, director of sanitary engineering in the Health Department, will be technical secretary and administrative agent of the new group.

Pollution control activities in Kentucky will be integrated closely with the interstate Ohio program because of interlocking membership in the two.

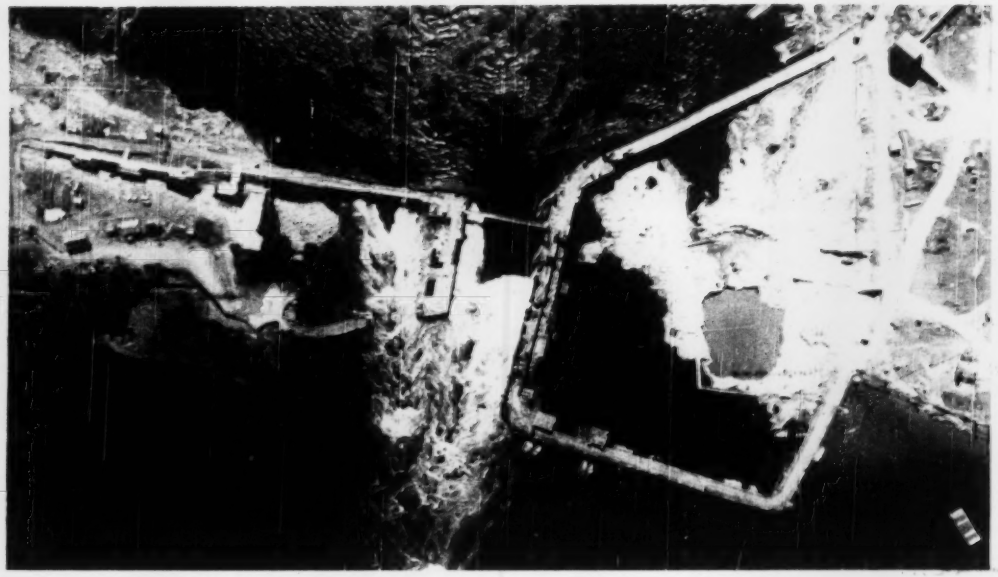

FLOODS THREATEN COFFERDAM—High water in the Winnipeg River, Manitoba, late in May threatened for a time to overtop the powerhouse cofferdam (right center) at the Pine Falls power development. To relieve the situation, two breaches were blasted in the sluiceway cofferdam (left) to provide an additional channel. The flow at that time had reached 97,000 cfs. Water inside the powerhouse cofferdam was leakage. It has since been pumped out and rock excavation has been resumed. The dam and power plant are being built by the Manitoba Department of Mines and Natural Resources, for which J. R. Rettie is project engineer. Contractor is the Foundation Company of Canada.

"One job" companies are tax law target

If a bill now shaping up in the House Ways and Means Committee ever becomes law, one of the most effective tax maneuvers yet devised will be outlawed for good.

It's the "one-shot" or "collapsible" corporation. It has been used hundreds of times by movie producers and building contractors to get quality income for taxation as capital gains rather than at the 1st stiff rates applicable to ordinary income.

For several years, the Bureau of Internal Revenue has been trying to stop the practice, and to recover such savings. But officials suspect strongly that the maneuvering is still going on.

• **When is a collapse?** Troublesome, it's hard to prove that a "collapsible" really is wrong, especially when the corporation complies with the letter of the law. Anyway, the Bureau hasn't been able to collect in every case, though its efforts have restrained a lot of would-be imitators. Now, however, the committee's action would make it easy for BIR to crack down.

The typical "collapsible" corporation is organized to produce one movie or put up a single apartment house or office building. When the job is finished—and before any income is earned—the corporation is dissolved; its assets are distributed to its stockholders. No tax is paid by the corporation as it has received no income.

For tax purposes, the stockholders value the film or building at what they guess it will bring later. Then they pay relatively small capital gains taxes on the difference between their original investment and this fair market value. As income is received, up to the market value, it is considered tax-free. And that's all there is to it.

Here's how the device was used:

• **One film only.** A corporation was organized in California for the sole purpose of making one film. The producer and his wife owned all the capital stock (par value $1 a share). A year later, when the film was finished and distribution contracts signed, the corporation was liquidated.

Market value of the film was estimated at $1,452,000. To find his capital gain, the producer deducted his initial investment plus production costs which he had assumed as liabilities of the dissolved corporation. The net gain was better than $500,000.

The 25% ceiling on capital gains keeps the producer's tax down to about $150,000. Had the producer not qualified the income thus, he would have paid regular corporate taxes of 38% and individual taxes up to 82%—almost $500,000 in all. So he's ahead more than $250,000.

To end this kind of tax calculation, the committee voted to tax as income any gains realized within three years after completion of the operations for which the corporations were created. Now, you hold them six months.

• **BIR isn't happy.** Strangely enough, the committee's vote hasn't made BIR officials entirely happy. They want some legislative action, of course. But they object to the form the proposed draft takes.

In their view, the language may lead to a loss of revenue. Reason: In setting out what taxpayers may not do, the new provision—by implication—says what they may do. In other words, they feel that a lot of businessmen now paying income taxes may be encouraged to set up "collapsibles," then wait three years.

There's a good chance that, by the time a bill gets to the White House, the language problem will have been straightened out. It is not a serious obstacle. Most Congressmen favor revisions that plug genuine loopholes.

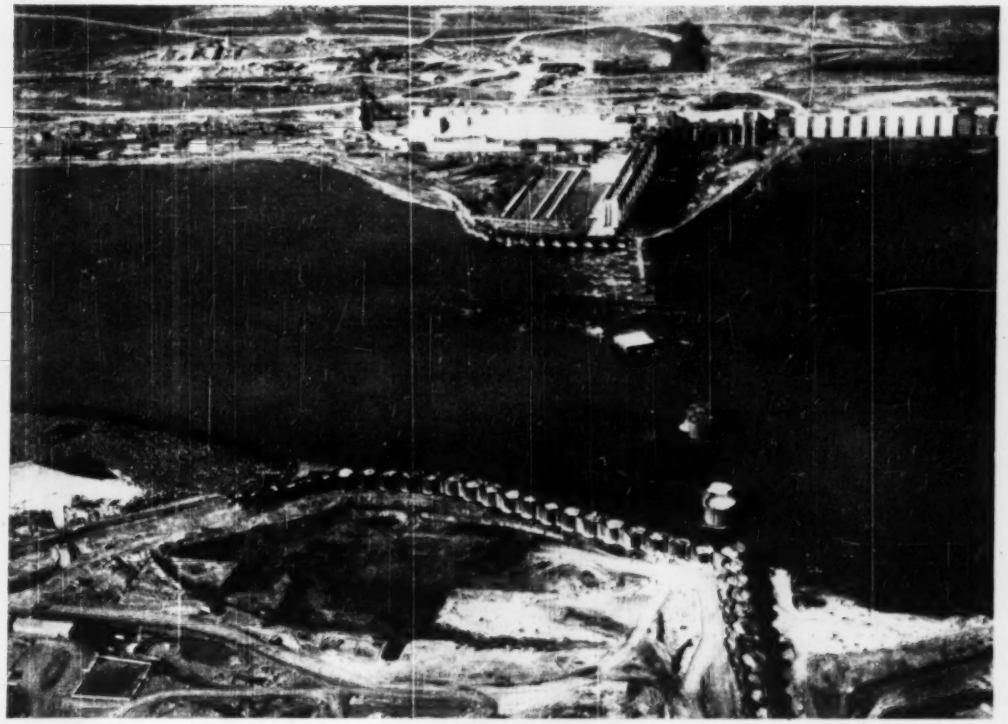

THE SITE FOR THE BATTLE with the river is the 240-ft gap between the two pairs of sheetpile cells in the right center. By early fall other cells will block the rest of the river flow, after which precast concrete blocks and rock will be dropped from a cableway to close this opening.

The toughest river diversion in construction history . . .

Taming the Columbia River at McNary Dam

Colonel William Whipple
District Engineer
Walla Walla District, Corps of Engineers

FINAL WORK is under way to prepare for what promises to be a spectacular construction feat: the turning of the Columbia River at McNary Dam.

To close the upstream part of the second-stage cofferdam, the entire flow of the river must be forced through twelve flow-blocks in sections of the spillway, each 50 ft wide, built within the first-stage cofferdam.

Here is what makes the job a tough one: The lowest flows that can be anticipated are within the range of 75,000 to 100,000 cfs. Final closure must be made against a 17- to 20-ft head in a rock channel 40 to 60 ft deep at low water.

• Controlling factors—There is only one time of the year, early October, when closure can be made satisfactorily. Floods big enough to preclude closure can occur at any time through out the late fall, winter and spring, and are sure to occur in early summer. The tail run of Chinook salmon absolutely precludes closure in August or September. Thus, early October is the only time that seems safe to start the final closure, an operation that may take as much as two months.

To allow maximum time for preparations, the final closure scheduled for October 1950 was included in the major construction contract awarded in August 1949. The general plan was specified by the Corps of Engineers, but methods of placing component parts were planned by the contractor to provide a very rapid and sure closure of the entire channel.

• Initial steps—The Washington channel (about 20 ft deep) has been divided by eight heavy rock-filled timber cribs, each 50x60 ft, placed in about 50 ft of water. These cribs were partly built on the shore, floated into place and filled from a connecting bridge. They are accurately fitted to the rough bottom and designed to withstand heavy ice and flood conditions.

As an initial step, it is planned to

Earlier articles published on McNary Dam work are:
McNary Dam Includes Highest Lift Lock (ENR Sept. 30, 1948, p. 56)
Step-Two Bids Received on McNary Dam as Step-One Concrete Work Proceeds (ENR Aug. 11, 1949, p. 26)

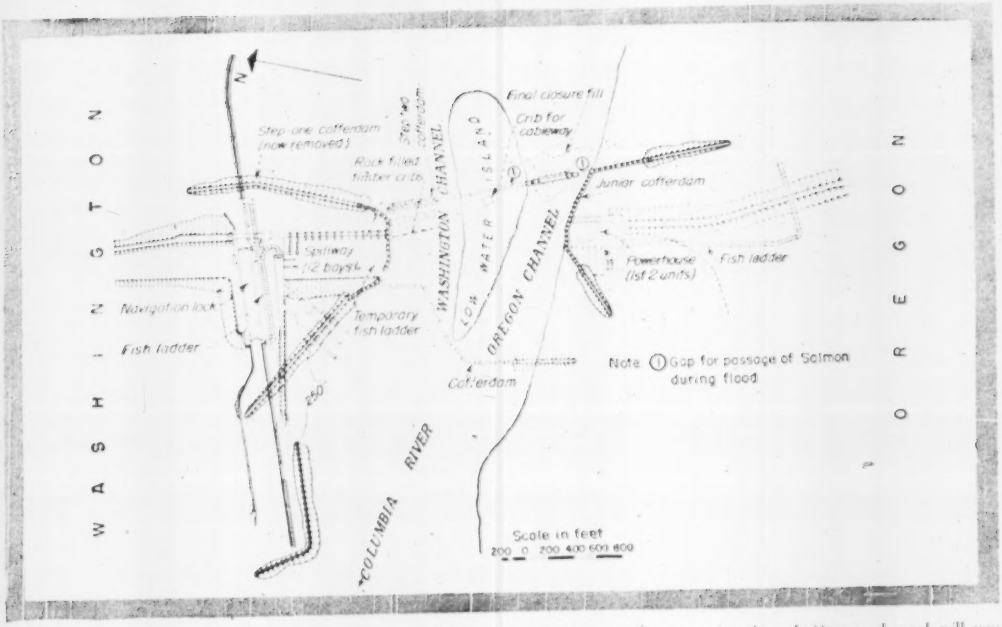

COFFERDAM LAYOUT and closure details at McNary Dam. Tug and barge traffic now going through Oregon channel will pass through the navigation lock after diversion of the river through the spillway section.

drop concrete stop logs in front of the cribs, to allow the driving of steel pile cells in quiet water upstream.

The island between the Washington and Oregon channels is swept by flood waters in spring and early summer. But after the flood, this section will be blocked by sheet pile cells built in the dry.

Astride the deep 240-ft wide Oregon channel two sets of two cells each have been placed behind temporary rockfills run out from the sides. The gaps shorewird of these cells are now open to allow passage of salmon that might otherwise not be able to overcome the concentrated current during the June flood. These gaps can be filled by sheet pile cells prior to the final closure.

Normal river traffic is still able to navigate the deep Oregon shore channel even though velocities up to 9 fps have been recorded. When diversion starts, the navigation lock will be worked with a temporary gate setup.

Work already done inside the Washington shore or step-one cofferdam includes the twelve spillway bays, the navigation lock and the fish ladders. The spillway bays were left 40 ft below final elevation to pass the river flows after diversion of this tail. These bays will be stoplogged and raised to final elevation under a separate contract later. At that time the river flow will be diverted through skeleton powerhouse bays.

On the Oregon shore a "junior" cofferdam abuts the deep water channel. This permits early start on portions of the powerhouse so generating units can be placed on the line soon.

• **Final closure steps**—Alternate methods for final closure of the main channel were tested in the Corps of Engineers' hydraulic laboratory at Bonneville Dam.[1] Steel sheetpiling alone is precluded by depth and flow velocity; closure by cribs would be possible but very difficult because of unprecedented hawser pulls and an irregular channel with steep sides that even overhang in spots. The narrow channel and river-of-rock closure method favor a closure by heavy rock, even though large rock is scarce—the native basalt breaks too small. The critical portions, then, will be made of 8-ton tetrahedrons precast of low-grade concrete. Tetrahedrons will be placed from a cableway with movable head tower on the Oregon shore and tail tower anchored in a crib built in mid-stream on the low water island. Fill in areas not subject to the highest water velocities will be made of rock.

Assuming a 300,000-cfs flow of 100,000 cfs and a downstream slope of 1 on 2, the maximum velocity across the crest of the fill will be 30 fps with a head differential of 9 ft. The tetrahedrons are expected to be stable under such velocity conditions.

However, when the fill is raised another 10 ft, with a head differential of 12 ft, the velocities on the downstream face will be 35 fps at tailwater elevation if the slope remains at 1 on 2. This is a much more severe condition. Accordingly, a sufficient number of tetrahedrons will be provided to allow for possible movement and a resulting flatter slope.

Water will start pouring through the gaps left in the twelve spillway sections at El 250. For a 100,000 cfs flow, the upstream water surface must be raised to El 270. As this height is reached, velocity through the closure section will decrease, since more and more of the flow will pass over the spillway section. Thus, even though there will be an 18-ft head difference between upstream and downstream water levels at closure, most critical velocities will be at about a 12-ft head differential.

Since the highest velocities will occur on the downstream slope, it is planned to spread the tetrahedrons in the lower layers well downstream. Tetrahedrons for subsequent lifts may be placed further up stream where slower velocities will be encountered.

The upstream portion of the fill will be made of as large rock as is available. The procedure will be: Place a dike of tetrahedrons; fill upstream from that with a rock blanket almost up to the crest of the dike; place another dike or layer of tetrahedrons; then place more rock. All of

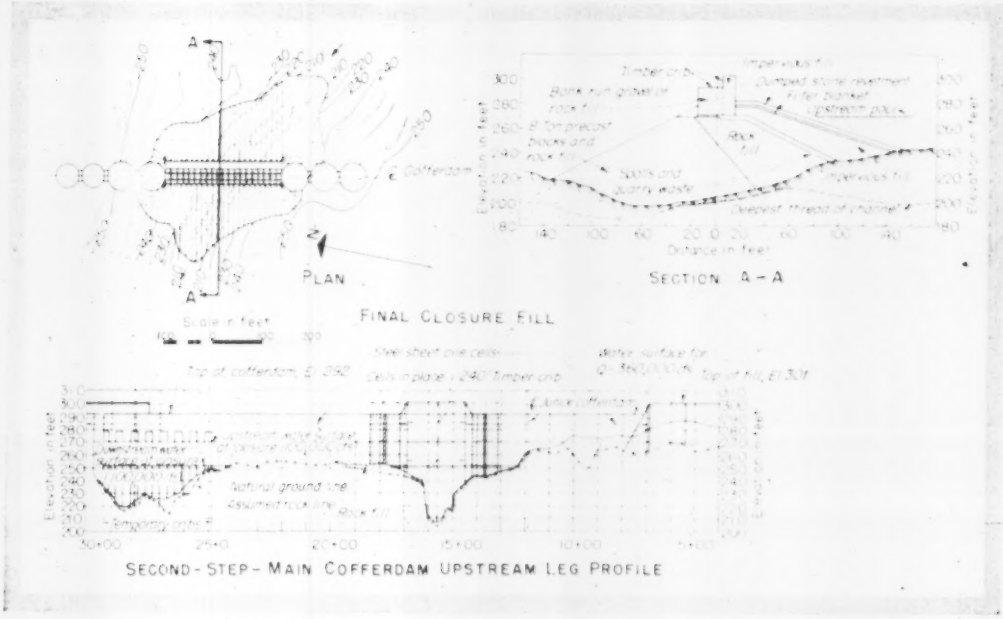

UPSTREAM COFFERDAM for second step construction includes steel sheetpile cells plus a 240-ft wide rock and precast block fill topped by a timber crib. Cells in Washington channel will be driven in still water formed by concrete logs against cribs.

these materials will be placed from the movable cableway.

According to the contract terms, this rock work must be done within a 9-day period. To avoid flood hazards, this final diversion work will include cells be placed a good deal lower than that.

The fill of rock and concrete tetrahedrons will be carried to such elevations (probably El 270) that the rock-filled timber crib to surmount it will be built in the dry. The upstream face of the fill and timber crib will be made tight by means of impervious clay-type materials.

When closure of the upstream leg is accomplished, the main "second step" cofferdam will be completed by a downstream leg 26 ft lower than the upstream one. This cofferdam will be overtopped by the flow over 380,000 cfs and is expected to be flooded at least once during construction of the dam and powerhouse. Temporary fish ladders must be provided to allow the escape of any salmon trapped in this cofferdam as a result of such a flood.

• **Power due in 1953.** The McNary powerhouse, which will be one of the larger plants in this country, will have an ultimate installed capacity of 980,000 kw, consisting of fourteen 70,000-kw units, and will meet peak loads up to 1,127,000 kw. In addition, there will be provision for six additional units if required. Present schedules call for the first two units on the line by Dec. 1, 1953.

Construction work is under way inside the junior cofferdam on the substructure for units 1 and 2 and the assembly and station service slabs. Contract plans are being prepared for the balance of the powerhouse, consisting of the substructure for units 3 to 14 and the complete superstructure. Present program calls for the contract for this portion to be awarded in May, 1951. This will amount to some $30,000,000.

Size of the equipment to be in

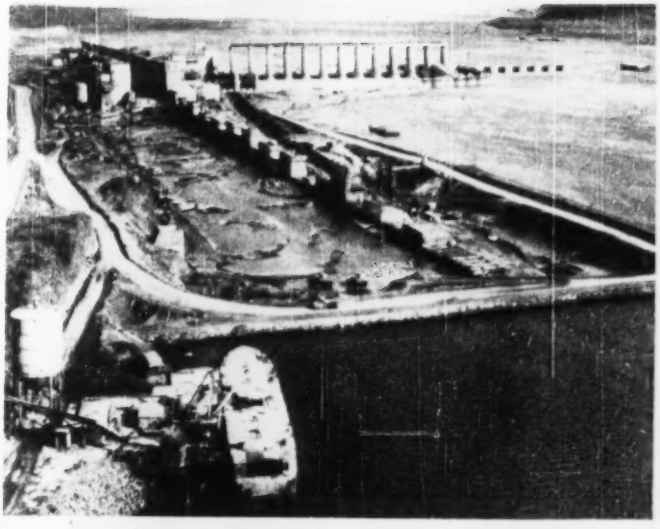

STEP ONE WORK included navigation lock (left) and spillway sections (right). Step-two cofferdam will extend to the right. Note cement barge unloading in foreground.

stalled is noteworthy. By selecting low-reactance type generators, one transmission line will be saved. But physical size of the generators will be perhaps the world's largest. Rotor diameter will be 36 ft, over-all diameter will be 57 ft and weight will be 600 tons.

The six bladed Kaplan-type turbines will also be gigantic. Runner and shaft will weigh 345 tons and the estimated shipping weight for each turbine exceeds 1,100 tons.

• **Construction progress**—Good progress has been made on construction contracts awarded. The McNary Dam contractors, consisting of Guy F. Atkinson Co., J. A. Jones Construction Co., and Ostrander Construction Co., have been awarded the two major contracts so far at the dam site. R. J. Jenks has been project manager for the Washington shore contract.

Despite unusually cold winters, concrete placed to April 14, 1950, totaled 768,000 cu yd. Concrete work on the Washington shore contract is now complete except for the upper portions of the fish ladder. A temporary gate has been installed in the navigation lock and the cofferdam has been removed. The mixing plant has been dismantled for re-erection on the Oregon shore, where it will place the first concrete for the powerhouse substructure by the end of June.

TABLE I—STEEL QUANTITIES FOR McNARY PROJECT

Item	Weight (tons)
Reinforcing steel	51,000
Structural steel	4,000
Steel sheet piling	13,000
R. R. rail	17,500
Power units	17,000
Transformers	1,500
Spillway gates	4,000
Lock gates	1,500
Cranes	1,000
Embedded steel	9,000
Valves, stoplogs, etc.	10,500
Miscellaneous	1,000
Total	131,000

Because of the large quantities of steel and heavy formwork, concrete volume is only a partial measure of progress. In terms of concrete, McNary will be about the eighth or ninth largest dam to be constructed in the United States (1,850,000 cu yd). In the amount of steel used, however, it is believed that McNary breaks all records. Steel used will total 131,000 tons—about three times the amount used in a modern battleship.

Other supply and construction contracts under way involve major work throughout the generator site and at manufacturing plants all over the United States. Contracts have recently been awarded for construction totaling about 40 miles of railway relocations, including raising the main line of the Spokane, Portland and Seattle Railway and the Spokane line of the Union Pacific under traffic, through the precipitous cliffs and 400-ft talus slopes of the Wallula Gap. This work must be completed prior to the flood season of 1951.

About as much more rail relocation remains to be done, including some joint use line, replacing separate facilities. Nine major bridges must be raised or replaced across the Columbia, Snake, Walla Walla and Yakima rivers, with three others across Juniper and Spiuskowski canyons.

The funds appropriated for this project, totaling $72,575,000 to date, will be practically all obligated by the end of the fiscal year. Total contracts awarded, including continuing contracts, amount to $82,395,000 now.

• **Personnel**—The McNary project is being constructed under supervision of the Walla Walla District, Corps of Engineers. James S. Reeves, chief of engineering division; E. C. Franzen, chief of design branch; and Sam Nutt, McNary operations officer and resident engineer. Power plant design is under Robert Schuknecht of the North Pacific Division office. The North Pacific Division engineer is Col. O. E. Walsh, who was formerly district engineer of the Portland District and responsible for the earlier planning and construction phases of the project.

TABLE II—STATUS OF MAJOR CONTRACTS* AS OF MAY 15, 1950

Item	Contractor	Date Let	Amount	% Complete
Excavation of navigation lock	Guy F. Atkinson Co., So. San Francisco, Calif.	Apr. 14, '47	$743,485	100
Construction of first step cofferdam	Guy F. Atkinson Co., Portland, Ore.	Oct. 30, '47	1,116,610	100
Turbines for units 1-4	S. Morgan Smith Co., York, Pa.	Jan. 30, '48	4,957,627	10
Concrete aggregates	J. C. Chatwell, Albuquerque, N. M.	Jul. 29, '48	1,498,200	100
Constructing major portion of lock and dam on north shore	McNary Dam Contractors, Plymouth, Wash.	Jul. 30, '48	21,850,000	94
Generators for units 1-4	General Electric Co., Schenectady, N. Y.	Dec. 1, '48	7,302,674	7
Completion of Oregon shore cofferdam, etc.	McNary Dam Contractors, Plymouth, Wash.	Aug. 5, '49	15,839,540	16
Transformers	Mahaney Electric Co., St. Louis, Mo.	Sep. 16, '49	857,800	5
Relocation of 17.8 mi section of S. P. & S. Railroad	Morrison-Knudsen Co. Inc., Seattle, Wash.	Dec. 19, '49	12,276,224	21
Relocation of 11.4 mi section of U. P. Railroad and 11.1 mi of highway	Utah Construction Co., San Francisco, Calif.	Jan. 10, '50	3,930,709	17
Turbines for units 5-8	S. Morgan Smith Co., York, Pa.	Jan. 16, '50	4,974,993	0
Railroad track materials for Washington shore relocation	Colorado Fuel & Iron Corp., Denver, Colo.	Feb. 20, '50	721,862	0
Relocation of 11.5 mi section of railroad (S. P. & S.)	Gibbons & Reed Co., Salt Lake City, Utah	Feb. 21, '50	1,548,650	16
Generators for units 5-8	General Electric Co., Schenectady, N. Y.	Mar. 30, '50	6,483,220	0

* More than $100,000

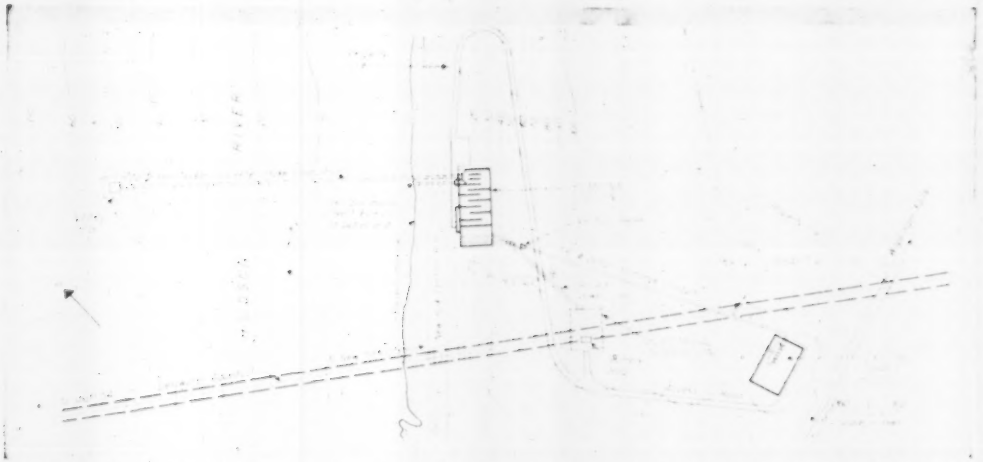

SITE LAYOUT was affected by location of aqueduct shaft and main line railroad. Crib was located for purest available water.

Design by Contract: New York's Hudson River Pumping Plant

New York City's Board of Water Supply has been forced by a critical water shortage to develop an emergency supply. To get the job done quickly—without taking many of its men from their work of engineering tomorrow's sources of water—the board wrote Contract 427, an interesting and unusual document. It calls for design, construction, equipment and temporary operation of a Hudson River intake and pumping plant. Time and money were saved by letting out the design along with construction. Construction is already well along, with eight months the completion time and a bonus offered for bettering it. The design is complete, has BWS approval and is presented in this article. A later article will deal with construction.

—Editor

On March 15 Fuller Construction Co. and A. J. Dillenbeck, of Red Bank, N. J., signed a $2,684,000 contract with New York City's Board of Water Supply to design, build and test a 100-mgd pumping plant on the Hudson River near Chelsea, N. Y. The contract was awarded on the basis of preliminary plans by which the bidders demonstrated to the board's satisfaction how they proposed to attack the problems of design and construction.

The contractor then engaged Charles T. Main, Inc., Boston consulting firm, to prepare engineering drawings and design details. As designs were finished, they got a BWS check, and construction began.

Information for Bidders

Here is what 17 bidders made their tenders on:

"Designs, construction and installations necessary to establish at shaft 6 of the Delaware Aqueduct, complete with all appurtenances and ready for use, a pumping plant capable of pumping 100 mgd of water from the Hudson River into the Delaware Aqueduct against a head of 600 ft, and a chlorinating plant capable of satisfactorily sterilizing the pumped water before it enters the aqueduct, together with suitable buildings for housing said plants; and for the operation of said plants for a period not to exceed four months subsequent to their completion."

There were alternates offered on operation of the pumps: Electricity or direct-connected diesel. The successful bidder was awarded the contract on the basis of electrical operation.

The Contract

Time is the prime consideration in this contract.

New York City's decision to tap the Hudson was made last Dec. 19. There followed this quick succession of events:

Jan. 9—The City's Board of Estimate approved allocation of funds for the project.

Jan. 18—The State Water Power and Control Board gave its sanction.

Jan. 28—Advertisements for bids on Contract 427 were published.

Feb. 20—Bids were opened.

Mar. 15—The contract was awarded . . . and the work order issued.

"The contractor shall commence the work . . . within 10 days after the service of a notice by the board to begin work, and shall complete the same . . . within 8 consecutive calendar months following service of said notice," says the contract.

Construction (clearing and excavation) began Mar. 20 and is due to be finished next Nov. 15. To insure completion of the work within the time allotted the contract states that:

"The contractor . . . shall pay for each and every day . . . that he shall be in default in completing the work to be done . . . the sum of $5,000 . . . not as a penalty, but as liquidated damages the city will suffer by reason of such default."

And to encourage the contractor

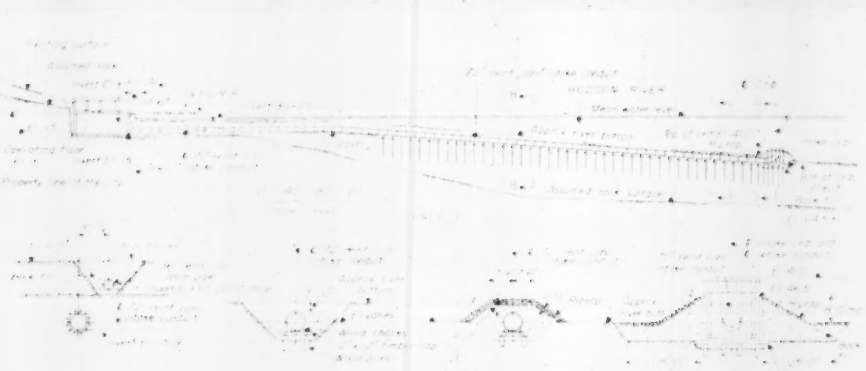

INTAKE CONDUIT—72 in. reinforced concrete pipe—will run from crib to pumping station, in a lined tunnel under railroad.

to have the installation ready before Nov. 15, an unusual clause stated:

"The city will pay to the contractor for such special advance delivery, the sum of $5,000 per day for each and every day . . . that the work to be done . . . is completed in advance of the time specified."

Specifications

"The intake crib shall be the submerged type, of heavy timber or concrete cellular construction . . ."

Timber will be used. A crib of 12×12 ft square in plan and 20.5 ft high will rest on 16 timber piles driven into the river bed. Top of crib elevation must be −41 ft below mean water level. The river bed must be excavated below bottom of crib to El. −61.5, then backfilled with a riprap paving after crib placement to 8 ft above original grade.

The exposed top 5 ft of the crib walls will have ports with gratings having clear openings not wider than 4 in. and a total open area of at least 200 sq ft.

Location of the intake is to be about 700 ft off shore in some 50 ft of water. It is required that

"The intake conduit shall be not less than 72 in. inside diameter . . . of reinforced concrete pipe, steel pipe lined and covered with concrete, or pipe of other materials of equal durability."

Reinforced concrete pipe of 72 in. dia will be constructed from crib to pumping station on timber pile bents for about 200 ft of the way. Where this conduit runs above river bottom, it will be given a 2-ft cover of fill, topped with 2 ft of riprap. Elsewhere the pipe is to be in a trench, covered with at least 3 ft of backfill.

Pile bents will be pairs of piles capped by 12×12 in. timbers, spaced at 12 ft-8 ft centers. Beyond the piles, the conduit will be supported on gravel fill.

Once ashore, the conduit must be passed under main line tracks of the New York Central Railroad, without interrupting traffic.

"Substructure of the pumping plant shall be located approximately as shown on the contract drawings."

The plant is to be placed just about as the contract drawing showed it—within the property owned by the City of New York at Delaware Aqueduct Shaft 6. This property is bounded by the New York Central's east-shore right-of-way and extends back from the river 725 ft to a highway connecting the villages of Chelsea and Wappinger Falls. Shaft 6 is 10 miles south of Poughkeepsie.

"The south end of the substructure shall consist of an inlet waterway and a dilution basin . . . a combined area of not less than 8,000 sq ft."

Actually, the intake conduit will enter the pumping plant substructure at its north end; flow through the plant will be north to south.

The 72-in. conduit, with invert at substructure floor level (−15 ft), will enter through a sluice gate well having stop-log slots and a 6-ft square sluice gate which will permit dewatering of the entire substructure. The stop logs will permit dewatering of the well for sluice-gate repairs.

Beyond the sluice-gate, flow will diverge into three separate channels, each containing a trash rack and traveling screen. Stop logs are to be provided at both ends of each channel so that any one channel can be dewatered for maintenance while the other two remain in operation.

Converging into a single channel after screening, the flow will be chlorinated, then passed through a series of six around-the-end baffles for diffusion en route to the pump room substructure.

"The remaining area of the substructure shall contain a pump well."

There will be three separate pump wells, each 17×23 ft in plan and 24½ ft deep. Sluice gates will control separate 5×3½ ft openings in the substructure wall between the diffusion chamber and each pump well. An overflow weir with crest 22 ft above substructure floor level is to prevent flooding of the building. A 5-ft drain will lead from the weir to a drainage sump, then out of the building and back into the river.

"A superstructure of semi-permanent construction shall be constructed to satisfy the housing requirements of the pumping plant and all its appurtenant equipment."

The pumping plant will be a steel frame building with insulated corrugated steel siding and an insulated, corrugated steel roof deck with tar and gravel roofing. With outside dimensions 168×72 ft, the building will be U-shaped in plan with both screen house and pumphouse wings extend-

ing westward toward the river. It is to be a one-story building above substructure, but story height will vary at the pumphouse end, increasing to accommodate the 15-ton traveling crane needed to handle pumps and fittings.

The central portion of the building, connecting the wings, will house the diffusion chamber in its substructure. On the operating floor level will be a large (69x26-ft) room for chlorine storage, equipped with a monorail for handling the chemical in drums. Space is to be provided for 30 one-ton containers.

Other space in this section of the building will be devoted to tool and equipment rooms, storage, toilet and lockers. The boiler room for heating the building will be at the rear of the screen house wing.

The open area between the wings of the building is to be for truck unloading. That portion of this area between the building wings will be concrete roof slab over the diffusion chamber. Grade will be at El. +11, operating floor level will be El. +15.

"Pumps shall be of the centrifugal type with either vertical or horizontal shaft."

Six vertical centrifugal pumps, each with 20 mgd capacity under a head of 600 ft, are to be installed in the pump house. This will permit one to stand by while the plant pumps 100 mgd.

A 20-in. cone-type check valve, a 4x6-in. branch with a 10-in. surge suppressor and 24-in. motor-operated gate valve will be installed in that order between each pump and the discharge header. Controls are designed for pressure regulation and surge suppression in the event of power failure.

"Motors may be either synchronous . . . or squirrel cage induction."

Six 2,500-hp synchronous motors will operate at 900 rpm on 60-cycle, 3-phase current at 4,160 volts.

"A welded steel pipe pump discharge conduit . . . shall be furnished and laid."

The discharge header within the plant (at El. +20) will gradually increase in diameter from 24 in. at the first pump to 54 in. at the fifth. Passing through the plant's east wall it will be a 54-in. welded steel pipe with 2-in. thick walls designed for 11,000 psi under a 650-ft head.

It will be laid in a trench on an 8-in. bed of sand for the 670-ft length from pumphouse to shafthouse. A Venturi meter, with head loss not greater than 18 in. for 100-mgd flow, will be installed in the discharge line to measure flow in the 10- to 150-mgd range.

At the shaft house, 600 ft above the Delaware Aqueduct, the 54-in. discharge pipe will divide into two 36-in. lines in order to approach the shaft cap from two sides and thus equalize thrust effect. There are existing 30-in. bronze gate valves on opposite sides of the shaft cap to receive the two new lines. Outside of these gate valves new 30-in. cone check valves will be installed, and a 16-in. pressure relief valve will be included to handle any sudden surge. Alterations at the shaft will be kept to the minimum, and care will be taken to introduce no appreciable unbalanced loads on the shaft cap.

"An outdoor type substation . . . shall be furnished."

The switching structure must have accessories for dead-ending the three 110,000-v incoming wires and transformers to cut this primary voltage to the motor voltage. A small, semi-permanent building of some 300 sq ft will house the storage battery and miscellaneous equipment at the electrical substation.

The substation is to be located about 250 ft southeast of the pumping plant with underground conduits connecting the two.

"The contractor shall build a 12-ft wide bituminous macadam access road."

A road, not to have grades exceeding 7%, must be built. It will lead down the hill from the highway which passes close by the shaft house to the pumping plant, with access to the substation and ample parking area. Chlorine shipments are expected to come by highway, so unloading and turn-around space is to be provided for trucks.

G. R. Rich was in charge of design work for Charles T. Main, Inc. For the Board of Water Supply, designs were reviewed and checked by Walter J. Gress (plant layout and structures) and Frederick G. Switzer (mechanical and electrical equipment). Harris Fale is department engineer, and John M. Fitzgerald is chief engineer of the board.

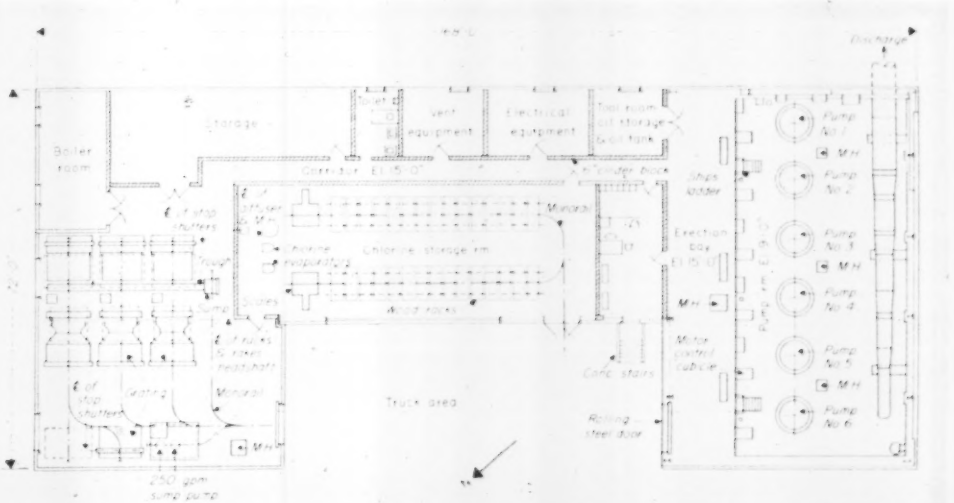

OPERATING FLOOR of pumping station will have intake controls and screens, chlorination equipment and storage, and pumps.

Construction—

Canada's First Subway

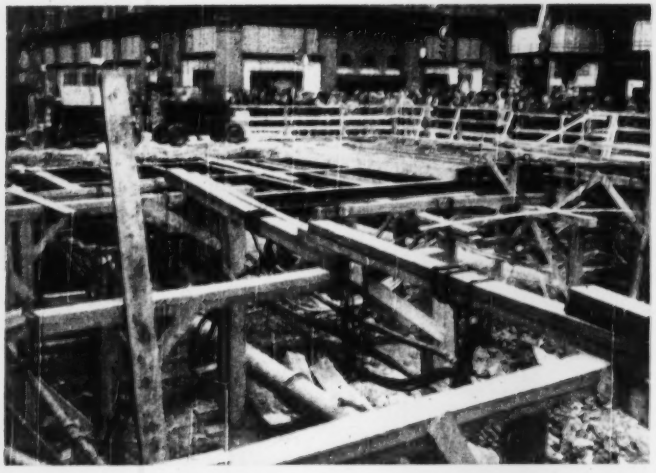

1 TORONTO'S YONGE STREET traffic capacity drops to zero so subway for 40,000 people hourly can be built. Maze of timbers carries maze of utilities exposed by cut-and-cover subway's initial excavation. Only one block opened at a time.

4 BULLDOZER FEEDS CLAMSHELL that loads trucks on street above. This is the intermediate-level cut. Bracing is required because soil outside is loosely compacted, thus placing extra load on the H-piles used as main supports. Ground conditions vary throughout job, with little rock and negligible water.

5 REINFORCING STEEL unloaded from truck for delivery below-deck to box section of subway. Deck will be replaced with concrete slab.

As CONSTRUCTION nears the one-year mark in Toronto's four-year program to build the first subway in Canada, it is possible to present these pictures of important work stages.

Location is in Yonge St., the city's main north-south commercial route. Three miles of two-track subway will run in a reinforced concrete box section of rigid frame design. The line will extend another mile and a half in open cut.

The subway is to replace two trolley lines having one-way hourly capacity of 18,000 passengers. The new facility will increase this to 40,000.

In addition to being Canada's first underground railroad, Yonge St. subway is the first of two lines planned by the Toronto Transportation Commission, and coordinated with the plans of the City Planning Board. The initial system also includes an East-West 4-mile line. Work on the second line is not under way.

Total cost of the Yonge St. subway is estimated at $40,000,000. $10,000,000 having been contracted in July, 1949, for the first mile of underground work. A second subway section was let in May for $7,000,000. Construction will be complete in 1953.

The most difficult construction probably is encountered in the first contract section because it encompasses Yonge Street's most heavily built-up stretch—inland from a point near Lake Ontario.

Work is cut-and-cover, in earth. Construction consists of: 1, Driving H-piles along right-of-way lines; 2, excavating initially for a steel and timber deck to be supported by the piles; 3, tying up underground utilities to the deck; 4, excavating for the subway between H-pile lines—lagging is placed between H-piles as digging proceeds; 5, placing the structure.

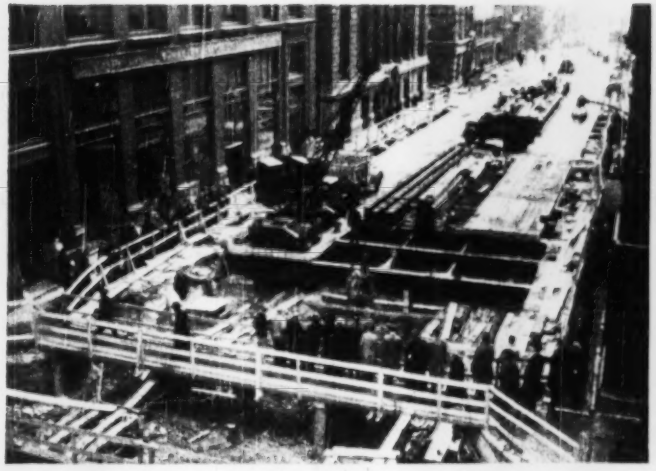

2 TRAFFIC RESTORATION proceeds as quickly as possible, as steel and timber deck is placed over initial excavation. Beam loads will be transferred from cribbing to H-piles driven as much as 40 ft deep in hand-excavated trenches on right-of-way lines. (Shallow trenches exposed utilities, to prevent damage by piles.)

3 SHOVEL WORKS FACE for primary underground cut. Truck-access ramps were built to side streets at 2,000-ft intervals.

6 FIRST CONCRETE goes into subway floor slab. Concrete is dropped, from truck at street level, into hopper and elephant trunk.

Future work involving 1½ miles of open-cut work will have steel or concrete bridges for cross streets.

Chief engineer for the Toronto Transportation Commission is W. H. Paterson; H. C. Patten is general manager. Contractor for work pictured here is a syndicate made up of C. A. Pitts, Toronto, Arthur Johnson Corp., Long Island City, N. Y., Johnson, Drake & Piper, New York, and B. Perini & Sons, Inc., Framingham, Mass. Charles B. Molineaux is general manager for the syndicate.

Contractor for the second section is Rayner Const. Co., Leaside, Ont.

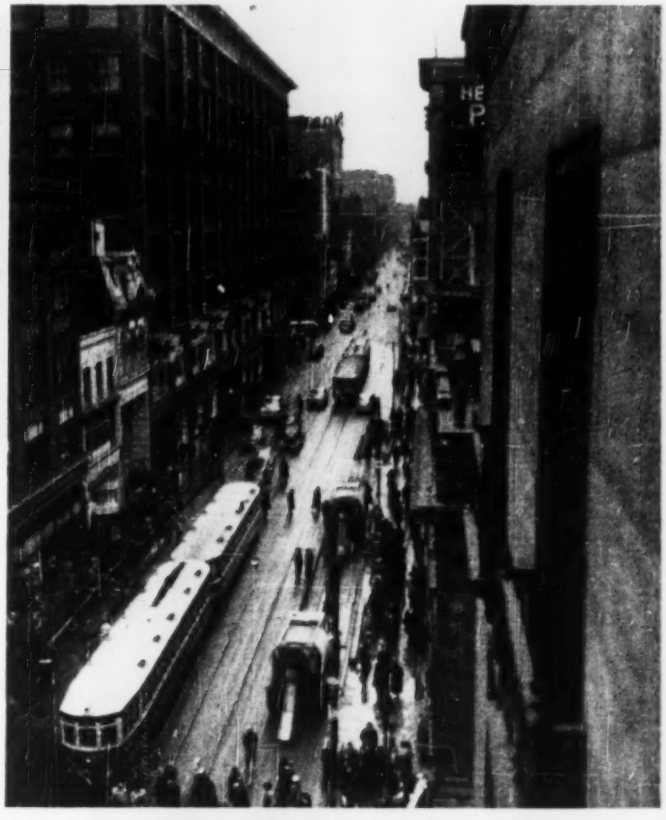

7 TRAFFIC RESTORED—Trolley lines that carry a maximum of 18,000 people an hour resume operation on timber-decked street. Single lanes outside car tracks leave little room for vehicles and construction equipment. Truck shown delivering concrete through deck. Subway cut width is 32½ ft, 52 ft at stations.

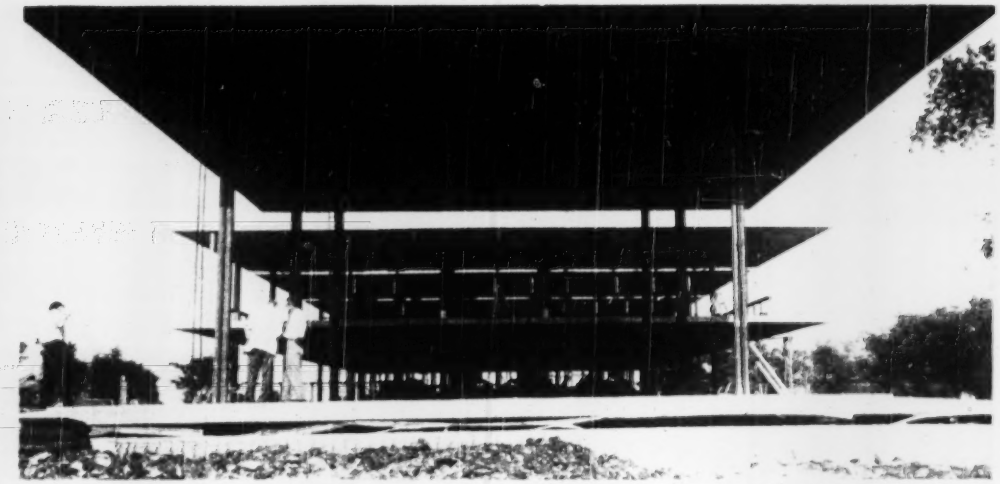

CONCRETE ROOF and second floor of Trinity University building were cast on the first floor slab and jacked up into place.

Building Raised by Its Boot Straps

NEAREST APPROACH to lifting by the boot straps is the method of erection used for a two-story classroom-administration building at Trinity University, San Antonio, Texas. The reinforced concrete slabs for the second floor and roof of the 61x384-ft structure were cast on top of the ground floor slab. Then, they were raised (they were 73x40-ft sections weighing 168 tons) by jacks on the columns.

This method is estimated to have saved $0.54 per sq ft of floor area.

The building contains 27 classrooms, mostly 24x24 ft, located in the center portion and separated by stairs and toilets from offices at both ends of the structure. It is of flat slab construction with 8-in. steel box columns.

The columns were formed by welding two 8-in. angles together and were later filled with concrete. In the longitudinal direction, they are spaced 24 ft apart, and in the transverse direction 24, 12 and 24 ft on centers. There are two cantilever overhangs—one 8 ft long and one 3 ft long—on the long sides of the building.

The exterior consists of 2-ft 3-in. high spandrels and 8-ft 1-in. high continuous steel sash. The spandrels are insulated, cellular aluminum panels. Sash and duct work are attached by studs shot into the concrete. Floor-to-floor distance for the first story is 11 ft 3 in. and for the second story 11 ft 2 in.

• **Slab design**—The first floor, cast on sand and gravel, is 8 in. thick and is finished with asphalt tile. The second floor slab is 9 in. thick. It has an asphalt tile finish on top and an acoustical tile ceiling on the underside. Also with an acoustical tile ceiling underneath, the roof is 7-in. slab, with 2 in. vermiculite insulation and built-up roofing on top.

The floors and roof were made of 3,000-psi concrete, with rock gravel coarse aggregate and round sand and crushed pea-gravel fine aggregate. Reinforcing steel ranges from ¾ to 1-in. dia and is spaced evenly across column and middle strips.

• **Bottom forms eliminated**—First step in erecting the building was to place the columns on prepared pedestals, anchor and grout them. The base slab, then, was cast. When it had hardened, the second floor slab was cast on top, the first floor slab being covered with a plastic-impregnated paper to prevent bond. The concrete was placed in sections 73 ft wide (including the overhangs) by 46 ft long. Only edge forms were needed. To enable the slab to be lifted later, a steel casting designed to slide on each column was cast in the slab.

When the second floor had set, separating paper was placed over the surface and the roof cast on top. Again, a steel collar sliding on each column was embedded in the slab.

• **Jacks lift 168-ton slabs**—After curing for 7 to 10 days and attaining 3,000-psi strength, each section of floor or roof was lifted by hydraulic jacks placed on top of eight columns. The jacks were activated by a pump operated by a 10-hp motor. Each jack had to lift 21 tons of the 168-ton load. Under favorable conditions, one slab was raised to second-floor height in 3 hr 30 min. Maximum rate of lift was 36 to 42 in. per hr.

The weight was supported on two threaded steel rods (jack screws), each 12 in. dia, attached to the steel castings embedded in the slabs. The hydraulic jacks, which are now obsolete because of recent improvements, raised the slabs in small increments. When being retracted for another bite, the jacks automatically shifted the load to their bases, which were seated on top of the columns.

The operation was controlled by a man at a panelboard, which registered the pressures in the hydraulic system and the relative height of the slab. He could set the elevation of the slab at each column within 1/16 in. When a slab reached its permanent position, 5-in. and 6-in. square by 1-in. thick steel seat blocks were placed against the underside of the column collars and welded to the columns. Then the steel castings were welded to the columns.

Pouring and lifting schedules were dovetailed to get maximum use of the

SECOND FLOOR, and later the roof, was cast in 46x73-ft sections embedding a steel collar around each column. And . . .

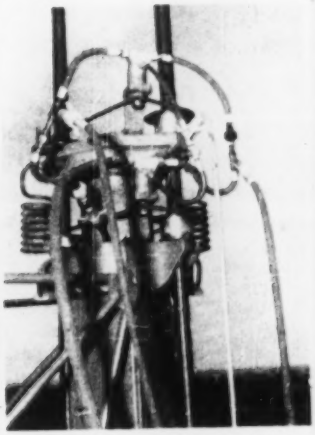

A MAN AT A CONTROL PANEL after the concrete tested 3,000 psi operated the hydraulic jack atop each column. Thus . . .

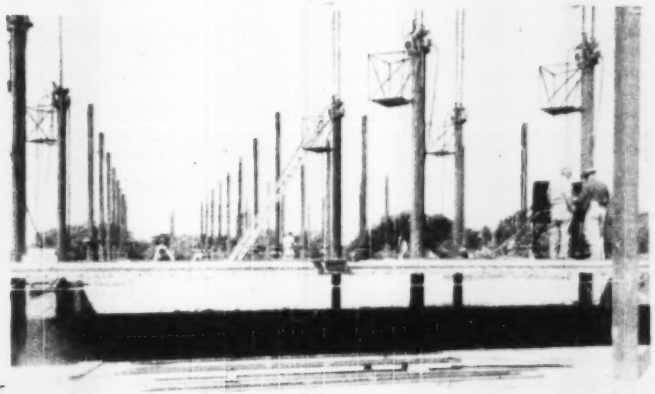

SLABS WERE LIFTED by threaded bars and finally the collars were welded to the columns. (James Stewart & Co. photos.)

plastic impregnated paper, which had been purchased in quantity sufficient to cover only 50% of the lifted area.

• **Method saved money**—The cost of lifting and setting the slab is estimated at 30c per sq ft. On the next job, it probably will be brought down to 25c per sq ft. Comparison of fixed-price bids indicates that the method saved the owner $24,000.

The equipment is capable of raising two or more floors at a time. For example, for this building the roof could have been raised 11 ft 2 in. above the second-floor slab, when the latter was still on the ground. Then, the threaded bars could have been attached to the second-floor slab and both slabs lifted together another 11 ft 3 in. to their final position.

• **Developers**—The erection technique was conceived by Philip N. Youtz, New York architect, and Tom Slick, San Antonio, Texas, businessman. It was developed by the Institute of Inventive Research, a non-profit organization for furthering development of inventions, and its affiliate, Southwest Research Institute, which conducts research for industry. Under supervision of IIR, Southwest supplied testing facilities and engineering personnel. Concurrently, IIR handled details of the licensing program and studies of applications of the method.

The classroom-administration building for Trinity University cost $279,364, including electrical, mechanical and heating installations. It was designed by architects Harvey P. Smith, Bartlett Cocke and O'Neil Ford, of San Antonio, Texas. William W. Wurster was consulting architect. Frank T. Drought was structural and mechanical engineer, and Fred N. Severud was consulting structural engineer. Gassner Aircraft Engineering Co. was consultant on the hydraulic system.

James Stewart & Co. was the general contractor, all phases of the work being directed by Roger Peabody, vice president. The slabs were lifted and set in place by the Texstar Corp.

Notes on Legal Decisions

Summaries of decisions relating to construction prepared by I. Vernon Werbin, counselor at law and engineer, New York author of Legal Phases of Construction Contracts (McGraw-Hill)

Construction of Contracts

The practical interpretation given to their agreement by the parties to it, while they are engaged in its performance, and before any controversy has arisen concerning it, is one of the best indications of their true intent, and courts that follow it will rarely go far astray.[1]

Where the parties proceed in the performance of the contract as though it had a certain meaning and that meaning is not entirely inconsistent with the wording of the contract, it should prevail.[2]

Where the parties have reduced their agreement to a writing, their intention is to be determined from its language and not on the basis of any intention either party may have secretly entertained.[3]

Contracts are to be construed so as not to place one party at the mercy of the other, or reach a result which the parties could not have contemplated and hardship and injustice are not deemed to have been intended.[4]

Where the language of the contract is unambiguous, the court will not substitute some other agreement for the one which is clearly expressed.[5]

In determining whether or not there is an ambiguity requiring an interpretation by the court the whole contract must be considered and not an isolated part.[6]

(1) Smyth v. Board of Commissioners, etc., 87 F. Supp. 138.
(2) Craig v. Thompson, 177 F. 2nd 457.
(3) Didriksen v. Havens, 68 A. 2nd 163.
(4) Pioneer Credit Corp. v. San Miguel, 92 N.Y.S. 2nd 138, 275 App. Div. 626.
(5) Shanks v. Wilson, 86 F. Supp. 789.
(6) Shipley v. Pittsburgh & L. E. R. Co., 82 F. Supp. 722.

Owner and Subcontractor

As a general rule, the party for whom the work is being done has no right of action against a subcontractor for breach of the contract as there is no privity of contract between the parties.[1] The subcontractor, for the same reason has no right of action against the owner. He must look for payment to the one who promised to pay him.[2]

(1) Majestic Mfg. Corp. v. L. Riso & Sons Bldg. Co., 27 N.Y.S. 2nd 945, affirmed 261 App. Div. 1029, 27 N.Y.S. 2nd 846.
(2) Nickol v. Polito, 179 F. 2nd 160.

Charging Prices in Excess of Those Fixed by Law

A contract was entered into between the contractor and owner for the erection of a building on a cost plus basis. During the progress of the work the contractor submitted bills for materials and labor, which were approved by the architect and paid by the owner.

Upon the completion of the work the contractor submitted bills for additional labor and materials furnished, which the owner refused to pay, contending that some of the charges made were in excess of the prices fixed by the Emergency Price Control Act and this made the contract illegal and the contractor was not entitled to recover anything. The trial court sustained the owner's contention. This determination was reversed by the appellate court which held that the contract as entered into was legal and the fact that the contractor made excessive demands did not make the contract illegal. The contractor was held to be entitled to recover the balance due for materials furnished and labor supplied at the prevailing rate and not the amount actually paid by him if it exceeded the legal rate. As to the amount already paid by the owner, the court held that the excess over the prevailing rate should be deducted from the amount finally determined to be due the contractor.[1]

(1) Hammel et al. v. Hutner et al., 95 N.Y.S. 2nd 66 (Appellate Division of Supreme Court of N.Y., Feb. 20, 1950.)

Additional Compensation

The general rule is that a promise to pay a contractor additional compensation for doing work called for by the contract is unenforceable because there is no consideration to support the promise. "Where the contractor can justify his refusal to proceed with the contract by showing that he is confronted with circumstances not contemplated when the contract was made which render its performance impossible or unduly onerous and the promisor, being informed of the situation, induces him by a promise of additional compensation to proceed with it, the contractor's right to that compensation ought justly to be recognized."[1]

In some cases the agreement will be enforced on the theory that the other party waived its right to have the work done at the contract price.[2]

It is important to note that in some jurisdictions statutes have been enacted whereby a contract may be changed or modified by a written instrument "signed by the party against whom it is sought to enforce the change, modification or discharge or his agent" and the same will be enforced even though made without consideration.[3]

(1) Dahl v. Edwin Moss & Son, 63 A. 2nd 562 (Supreme Court of Errors of Connecticut, Nov. 15, 1949.)
Grand Trunk Western R. R. Co. v. Nelson Co., 116 F. 2nd 852.
(2) Watkins & Son, Inc., v. Carrig, 21 A. 2nd 591.
(3) Section 33 of New York Personal Property Law.

Presenting the New

FEDERAL *Style LINER* SERIES

The Most Beautiful Trucks in America!

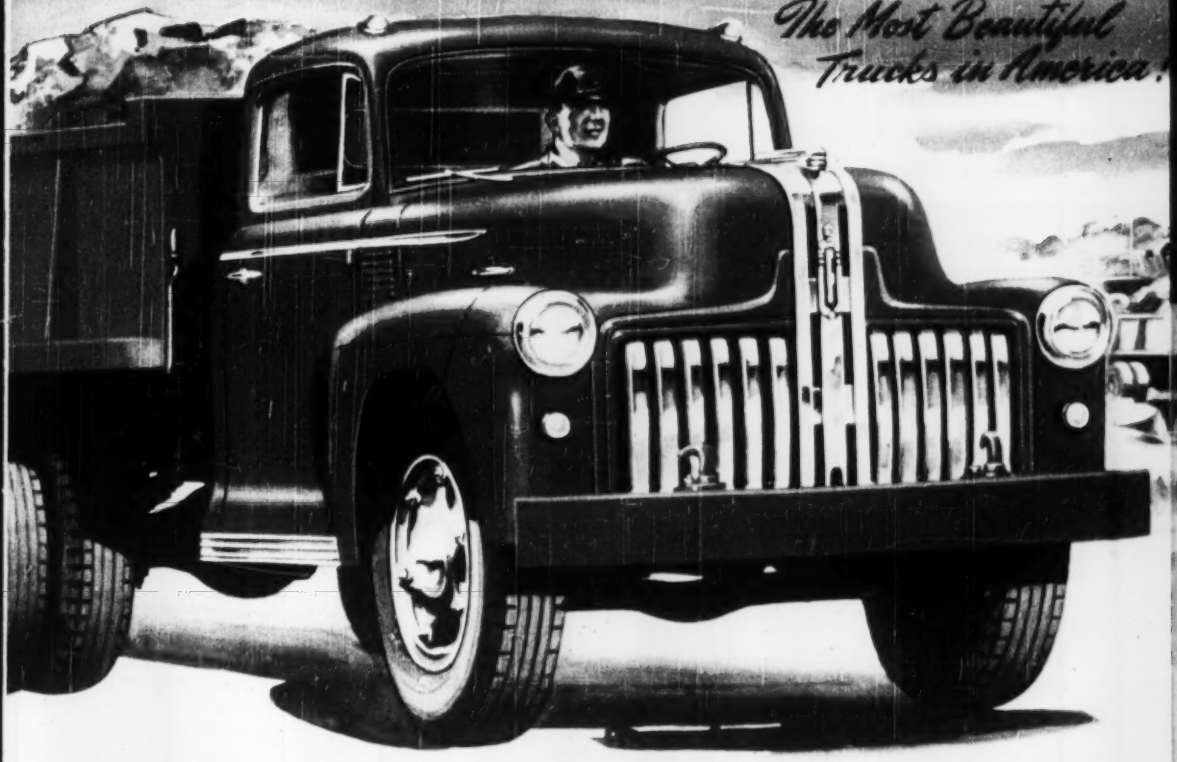

Here's the Truck . . .

THOUSANDS OF FLEET OPERATORS ASKED FOR!

In a nationwide survey thousands of fleet operators confirmed the judgment and sound engineering back of the more than one hundred new and improved all-truck features built into the new Federal Style Liners . . . 30% greater strength . . . 60% greater vision . . . 100% greater accessibility . . . ultra smart styling . . . unrivaled beauty . . . massive appearance . . . extra wide and roomier cabs . . . unparalleled comfort . . . easier steering and new high standards of performance make these new Federals today's outstanding truck value. There is a large selection of Style-Liner models . . . also a choice of several powerful high torque engines and wheel bases to economically master your hauling needs. Make a date with your Federal dealer now to drive a new Style Liner. It doesn't cost any more to own a new Federal—the truck that has everything.

FEDERAL MOTOR TRUCK COMPANY, DETROIT 9, MICH., U. S. A.

"I SAW MOTOR TRUCK HISTORY IN THE MAKING"

Says Lowell Thomas

Internationally known news caster, writer and explorer.

Read his booklet describing the new Federal Style Liner trucks. Mail coupon below today for your free copy.

Federal Motor Truck Company
Detroit 9, Michigan, U. S. A.

Send me a free copy of Lowell Thomas' booklet "I Saw Motor Truck History In The Making".

Name

Company

Address

City Zone State

FEDERAL TRUCKS

More Proof Why
FEDERAL *Style LINER*
IS YOUR BEST TRUCK BUY!

- ★ Longer, "smoother ride" front and rear springs for greater comfort—bigger payloads.
- ★ Rubber bushings in front springs and shackles provide quieter operation—longer spring life.
- ★ Heavy duty, wider track front axles for shorter turning radius.
- ★ Spring cushioned radius rod drive gives longer spring and axle life.
- ★ Built-in running boards with tool and battery compartments in step-wells for greater convenience.
- ★ Husky hypoid rear axles—the strongest ever built for the toughest handling jobs.
- ★ Pressurized cooling and increased radiator frontal area assures maximum engine performance.
- ★ Cabs have heavy duty chrome plated hardware. Doors are equipped with three heavy duty hinges.
- ★ Propeller shaft designed for maximum angle drive to rear axle. Shaft center bearing is rubber mounted for quiet, long life operation.
- ★ Big, sturdy brakes with wide lining area—stop quickly—operate cooler—last longer.
- ★ Powerful clutches with larger facing areas assure positive engagement—dependable service.
- ★ Heavy duty 4 or 5 speed transmissions of ample torque capacity for—quiet operation—easy shifting.

Over 100 NEW AND IMPROVED ALL-TRUCK FEATURES



BIG, POWERFUL ENGINES

These husky, all-truck Federal engines are designed for maximum operating economy and dependable, long-life performance.



GREATER COMFORT, ROOMIER CAB

Seats accommodate three large men easily and are readily adjustable. Cabs are double insulated for all-weather protection.



100% GREATER ACCESSIBILITY

New, exclusive "Swing-Lift" fender simplifies maintenance on engine, steering, front brakes, etc.—reduces down time—cuts repair costs.



60% GREATER VISION

One piece, full width, bent safety glass windshield insures maximum visibility—eliminates distortion. Dual electric windshield wipers standard equipment.



30% GREATER STRENGTH

Massive, sturdy frame side rail dimensions substantially increased and cold riveted for maximum strength and durability.



ALL-WEATHER AIR CONDITIONING

Fresh air heater and defroster is available with cowl intake vent, thermostatically controlled for all-weather driving comfort.



ACCESSIBLE WIRING PANEL

Electrical wiring under cowl is readily exposed by opening a door in instrument panel. Wires are colored for easy tracing of circuits.

FEDERAL TRUCKS

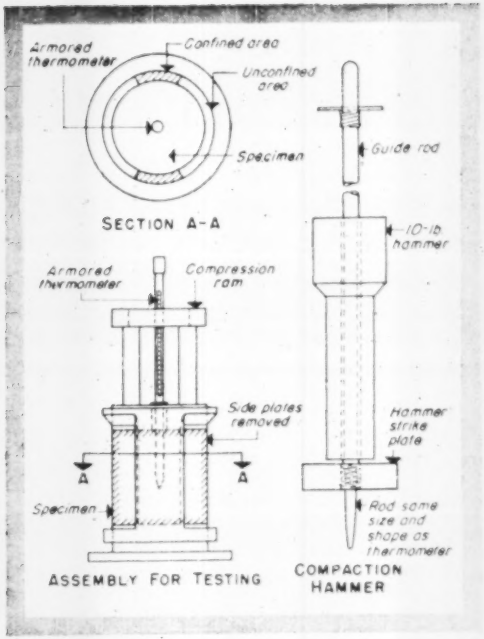

TEST APPARATUS designed for use in making quick stability test of asphaltic concrete at the hot-mix plant.

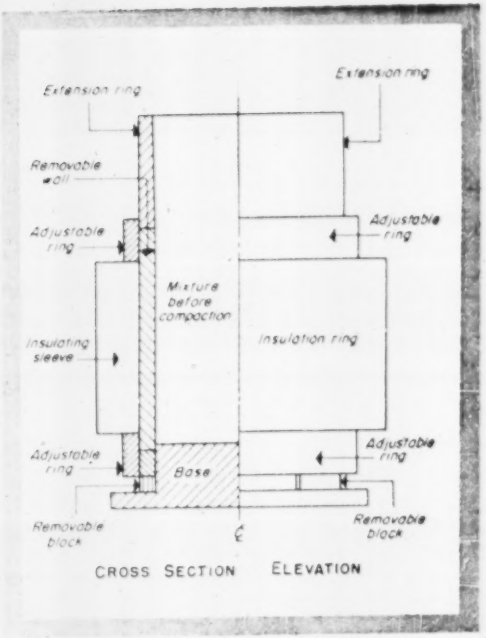

DURING MOLDING the specimen is protected from rapid heat loss by an insulating sleeve placed around the mold.

Rapid Stability Test Devised for Asphaltic Concrete Mixes

APPARATUS for making stability tests on asphaltic concrete mixtures right at the hot-mix plant in a few minutes time has been developed at the Iowa Experiment Station.

This apparatus, still in the development stage, was described in a paper at the Highway Research Board meeting by M. G. Spangler, research professor, and Ting Ye Chu, research associate, Iowa State College.

Specimens are 4 in. high and 4 in. in diameter. The test mold is used for both molding and testing, thus eliminating the time lost normally in cooling the assembly, extruding the specimen, and reheating the specimen to specified temperature before testing.

Before molding, a sample of about 1,850 grams is placed in an insulated weighing pan and covered with thick cardboard. A thermometer is inserted through a hole in the cover, penetrating to the center of the sample. When the temperature has dropped to 260 deg F., the molding starts.

After the mixture has received 50 blows from the 10-lb hammer dropping from a height of 18 in., the compression ram—together with the armored thermometer—is placed on the specimen, and a static load of 1,000 psi is applied for one minute. The combined height of specimen, ram and base plate is measured to 0.01 in.

The tentatively specified 50 blows with a 10-lb hammer followed by 1,000 lb static load gives a density a little higher than that obtained in the pavement right after compaction.

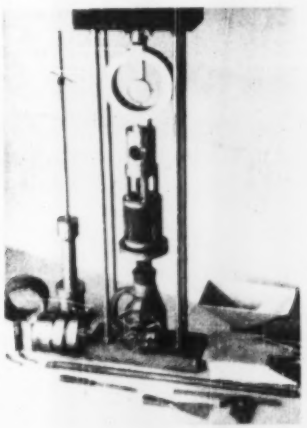

COMPLETE EQUIPMENT—The partly confined specimen is here shown under the compression test.

When the temperature of the specimen has dropped to 170 deg, as indicated by the armored thermometer, the attachments to the mold are removed and the specimen is ready for testing. As the removable side plates are taken away in this operation, the specimen is in a semi-confined state, with only a limited amount of side support remaining to simulate the side support received in the pavement.

The compressive load is applied when the thermometer reading drops to 160 deg, speed of testing being 0.2 in. per minute. The maximum reading on the proving ring is recorded and its equivalent load in pounds is termed the stability of the mixture. Investigation are being made to include flow characteristics of mixtures as an additional criterion for control.

Time from the beginning of molding to this stage is usually ten minutes.

After testing, the specimen is weighed and the density of the mixture computed. Since its temperature is still high, the specimen can be removed from the mold easily.

A discussion of the relation of this test to other well known stability tests is included in the Spangler-Ting paper. It will appear in the Proceedings of the Highway Research Board

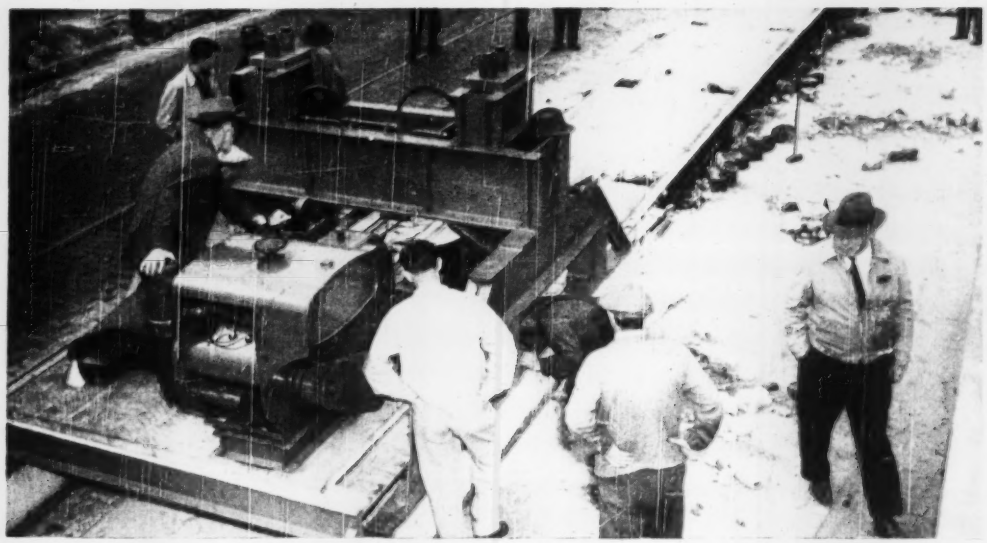

STRADDLING ABANDONED STREETCAR TRACKS, a skid-mounted puller speeds removal of rails from Chicago pavements.

How to Rip Rails Out of Pavements

OLD STREETCAR TRACKS—that annoy motorists and are driving hazards—are being pulled up at the rate of 1,000 ft a day by the Chicago Transit Authority. It is doing the work with a new-type rail puller that costs $1.50 to $2.00 per mile (both rails).

The machine not only speeds up a disagreeable job but also reduces the cost considerably. Rails are usually pulled out by hand jacks or by traveling cranes with tongs for rail attachment.

• **A rugged machine**—The rail puller, weighing 5 tons, consists of a fabricated steel frame from which are suspended two 125-ton hydraulic jacks. The jacks have jaws for clamping to the rails.

The machine is mounted on steel skids under heavy wood beams to spread its weight. The skids are set just far enough apart to permit a pair of tracks to be raised between them. A truck drags the puller along.

Oil at 5 gpm and 10,000 psi is delivered to the hydraulic jacks by a gasoline-engine-driven piston pump. The jacks have a lifting rate of about 18 in. in one minute. They can be used on one or two rails.

• **How it's done**—Small openings on each side of each rail are cut into the pavement at 10-ft intervals. Then the puller is positioned so that it straddles the tracks, the skids being set over the ends of the buried ties. The jaws of the jacks are clamped and locked to the rails in the pre-cut openings.

Hydraulic pressure is then applied. As the jacks rise, the rails come out of the pavement.

The weight of the machine and the pressure applied in lifting prevents ties and ballast from being pulled up with the rails.

Removed rails are cut up into short lengths and hauled to the Authority's equipment yards.

The rail-puller was manufactured by the Rogers Hydraulic Co., Minneapolis, Minn. It was built to plans prepared by CTA engineers.

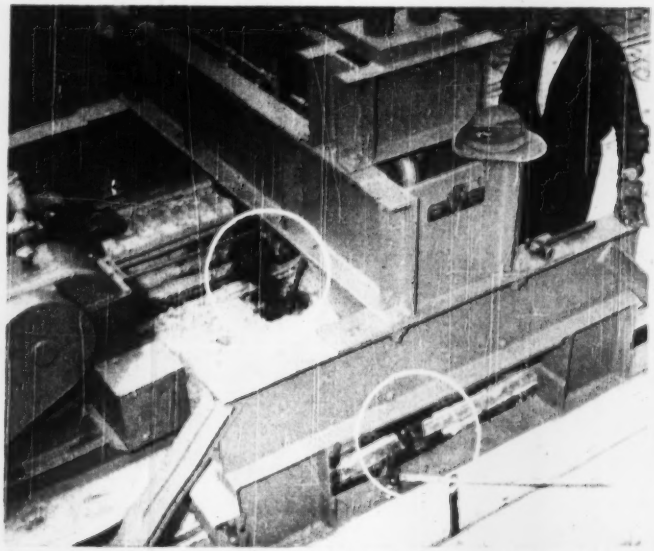

CLAMPED TO THE RAILS, powerful hydraulic jacks—suspended from the sturdy fabricated steel frame—lift at the rate of 18 in. per minute.

READER COMMENT

Building Economies

Sir: I was keenly interested in the Construction Trends article "New Buildings Pay Off" (ENR May 11, 1950 p 19). You and your staff are to be congratulated on another fine piece of journalism and bringing to engineers a fresh viewpoint on the relation of economics and engineering.

That new buildings pay off over old buildings is not limited to the industrial field—it is, I feel, equally true of other building fields such as warehousing and commercial.

D. L. Bricet
Consulting Engineer
Detroit, Mich.

Sewage-Treatment Report

Sir: In your abstract of our report on sewage-treatment financing (ENR March 30 p 32), the name of one member of the committee was omitted.

Luther T. Fawcett, chief engineer of the Mahoning Valley Sanitary District, was a Chamber of Commerce member of the committee.

Frank W. Barton
Secretary, Citizens Committee on Sewage Treatment Financing
Youngstown, Ohio

Mr. Fawcett's name was inadvertently omitted from the list of committee personnel.—Editor.

According to Plan

Sir: The paragraph, "Glass For The Glassless" (ENR May 11, 1950 p 17) suggests a misunderstanding of the idea back of the "windowless" factory at Corpus Christi. Both this paragraph and your original article (ENR Nov 24, 1929 p 42) have been very misleading to your readers.

In the original article the title, pictures and the context give the impression that there are virtually no windows or walls in the plant, and now your latest paragraph seems to infer that we were all wrong in our judgment, have found the climate too windy and are therefore about to enclose the entire plant with windows for protection against the wind.

The real facts in the case are these. In designing a food processing plant which, by the nature of its process, produces dust explosion hazards, dust decay problems and acid fume problems, it was the thought of the original committee set up by the owners, as well as the design engineers, to take advantage of the mild climate and eliminate these difficulties by leaving the buildings open so that the wind would carry the dust and fumes away.

Knowing that if the buildings were enclosed to start with, the walls would probably never be removed, it was decided to omit the walls, but to provide the structural framing so that enclosures could be added if operating conditions, after a year's experience, would so dictate.

The factors were not all known at the time of design because at least two portions of the process were entirely new and had never been used in any other plants of this kind. While some of the buildings were left open, the process was closed weathertight to eliminate bugs and sand.

Even from the beginning, all offices, toilet and locker rooms, laboratories, electrical control rooms, instrument rooms, machine shops, storage buildings, stairways and elevator shafts, scale house, packing and bagging rooms and the turbine and engine rooms were enclosed. The past year of operating experience has indicated that it is difficult to maintain proper working temperatures in the sugar crystallizers during extremely cold weather. Therefore, most of the walls of that building will probably be enclosed, and there are several other small areas in which it has been found desirable to give some protection from the wind.

All of this is in accordance with the original plan and in no way deviates from it. We firmly believe that operating experience is a much better basis on which to determine such things than haphazard guessing. There are still vast areas of the walls of this plant which will be left open. In these areas the design assumptions have been justified by operating experience.

R. I. Winters
Chief Engineer
The H. K. Ferguson Co.
Houston, Texas

A Correction

Sir: Somewhere in the process of getting my article on "Graphic Methods for Determining the Widening of Navigation Chanels at Bends" into type an error was made with respect to setting channel markers. The published text says they are set by the Coast and Geodetic Survey. They are set by the U. S. Coast Guard.

T. G. Thorgeson
Engineer, Jacksonville District
Jacksonville, Fla.

IRVING
GRATINGS
SINCE 1902
★
ALL TYPES
FINE WORKMANSHIP
AND SERVICE
at Competitive prices!
IRVING

SUBWAY GRATING CO., INC.
1 LONG ISLAND CITY, N. Y.
20 OAKLAND, CALIF.
Write for Catalogs and Estimates



New! *Fast Operator for the small jobs!*

WILLS DITCHER
$465.00 F.O.B. Topeka, Kan.

Ideal for footings, sewer lines, culverts, water lines, drainage ditches, laterals, etc.

Digs 10" to 20" width ditch approximately 50 linear feet per hour.

Maximum depth, 5 ft., but with additional depth kit will dig to 7 ft.

Can be installed easily on any Ford, Ford-Ferguson, or Ferguson Tractor.

• Save labor . . . . time . . . . money. Write for free folder and name of your nearest dealer.

WILLS MOTOR CENTER
1947 North Topeka Dept. E. Topeka, Kansas

DEVELOPMENTS ABROAD

Bridge across Blue Nile Ethiopia's biggest job

It is probable that the biggest construction project in Ethiopia during recent times (apart from the oil exploration project of Sinclair Petroleum in the Ogaden province) is the new bridge across the Blue Nile (Abbai River) now nearing completion. It is of the "Melan" (arch) type construction. Its length is 670 ft., with a road bed of 32 ft. The main span is of steel construction and is anchored in rock on both banks. Cost when finished has been estimated at $1,000,000. Work on the bridge was begun in 1947, and is expected to be finished this year, thereby connecting the two important provinces of Shoa and Gojam, which are completely isolated from each other during the floods caused by the big autumnal rains. Efforts are being made to complete the bridge before the 1950 rain period.

Foreign Briefs

Iranian cement—A modern cement plant is being constructed at Shiraz, Iran. It is designed to produce 200 tons daily, to double the national production. For the first time, it will provide Persian builders with locally produced, high-quality cement. Electrical equipment for this project and for the electric power plant of Teheran is being supplied by the Westinghouse Electric International Co.

Marshall Plan help—Nearly a billion dollars worth of modern machinery has gone into Marshall Plan countries in the last two years under the Economic Cooperation Administration's program to restore industrial and agricultural production in western Europe.

Santo Antonio Hill removal—A $28,500,000 contract has been let for the razing and removal of Santo Antonio Hill in the center of Rio de Janeiro, as described in ENR March 16, page 45. Awarded the contract was Companhia Constructora Brasileira de Estradas associated with Estacas Franki S. A. The hill is 219 ft high, covers 67 acres and is estimated to contain 6,500,000 cu yd of material—80 percent earth and 20 percent rock.

Rio-Sao Paulo highway—To speed the completion of the Rio de Janeiro-Sao Paulo highway before the close of this year, President Dutra has authorized the Bank of Brazil to make $20,000,000 available to the National Highway Department in eight $2,500,000 monthly installments. Lack of funds has been delaying construction.

International airport—Direction General de Aeronautica Civil is proceeding with studies for the international airport at Bogota, Colombia. It will be built a little further from the city than the present airport at Techo. It will have two runways, each almost two miles long and almost 1000 ft wide. Cost is estimated at about $7,500,000. Experts say that the airport will be usable by DC-4's, DC-6's, and Constellations.

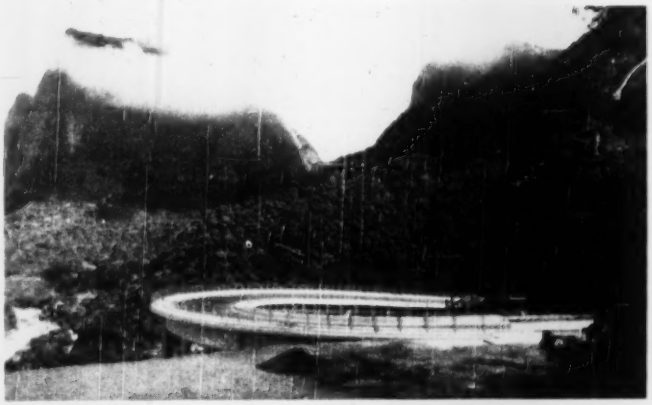

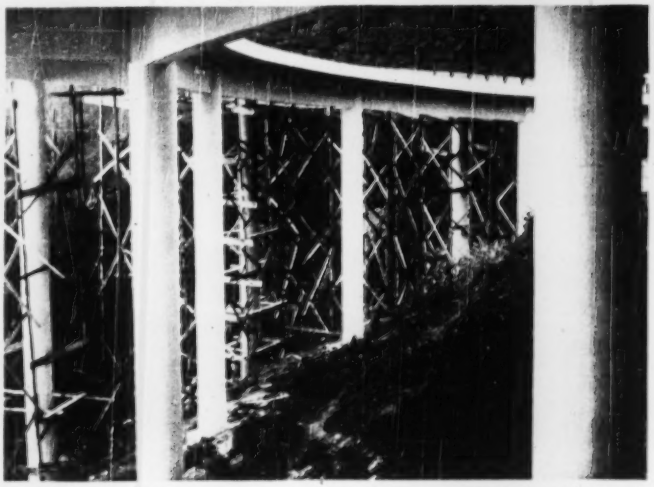

CIRCULAR VIADUCT ON RIO ROAD—To eliminate switchbacks which would have to be excavated in rock on a climbing mountain road in the southern outskirts of Rio de Janeiro, Brazil, a spiral-curved, almost semicircular, concrete viaduct was used effectively. Jutting out over the brow of a hill, it extends 330 ft in an arc of approximately 100 ft radius. In this distance it climbs 28 ft.

The deck, 33 ft wide, accommodates a 23-ft roadway with a 2-ft super-elevation and two 5-ft sidewalks. Supporting bents set on the radial lines are 23 ft apart longitudinally. The tallest rises 51 ft above the hillside. Each bent consists of two 40-in. dia. circular columns and an 18x60 in. crossbeam. Main longitudinal members connecting the bents are of the same dimensions. Other floor framing consists of floorbeams at 5-ft centers and a single longitudinal stringer under the centerline of the roadway.

The viaduct is the outstanding feature of a 3-mile highway that extends from sea level at the Gavea golf course over a pass at El. 1320 to the suburb of Gavea Pequena. The midpoint of the viaduct is at El. 894.

Design and construction of the entire project was directed by Luis Onofre Pinheiro Guedes, chief of the Rio highway department.

Estimated Forming Material Costs —$80,000.00*

UNI-FORMS did it for $43,251.40†

UNI-FORMS saved $36,748.60

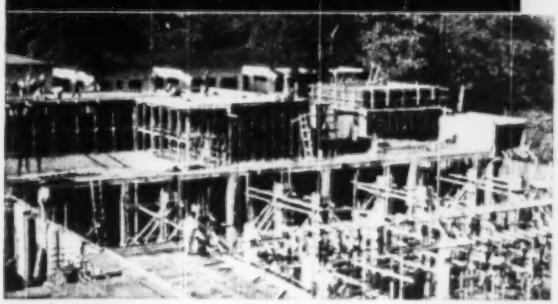

TUBERCULOSIS HOSPITAL, Rio Piedras, Puerto Rico
ARCHITECT: Isador Rosenfield
CONTRACTORS: Mendez, Grillasca, Nolla, Galib and Marquez, Inc.

UNI-FORMS built this 800 bed hospital in record time . . . formed walls, slabs, beams, columns, tunnels, retaining walls . . . and saved $36,748.60 in forming material costs alone!

UNI-FORMS reached the job ready to use . . . provided faster, smoother forming cycles . . . labor costs were ½ the estimate . . . possible only with UNI-FORMS!

You can use UNI-FORMS . . . to form *any* type of concrete . . . to save time, labor and material . . . to assure more profit on every yard of concrete you pour.

BILL OF MATERIAL FOR FORMING CONCRETE ON TURERCULOSIS HOSPITAL, RIO PIEDRAS, PUERTO RICO

***ESTIMATED:**	
1,000,000 Bd. ft. of lumber required for forms, walers, alignment, etc., @ $ .10 per Bd. ft.	$100,000.00
LESS 20% lumber salvage	20,000.00
TOTAL ESTIMATED COST	$ 80,000.00
†UNI-FORM COSTS:	
22,500 sq. ft. of UNI-FORMS	$ 37,256.80
400,000 bd. ft. alignment and bracing lumber actually used	40,000.00
SHIPPING UNI-FORMS TO JOB	3,800.00
	$ 81,056.80
Less Contractor's valuation of UNI-FORMS at end of job, 80%	$ 29,805.40
LESS 20% LUMBER SALVAGE	8,000.00
TOTAL ACTUAL MATERIAL COST	$ 43,251.40

UNI-FORMS SAVED ½ ON LABOR, TOO!

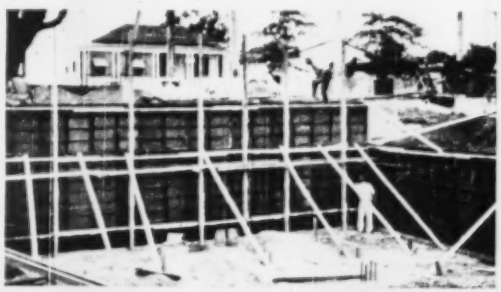

UNIVERSAL
Form Clamp Company
Founded 1912
1238 N. KOSTNER • CHICAGO 51, ILL.

Entirely New GarWood 625

LARGE CAPACITY

Heaped load (1:1 slope)	24.5 cu yd
Struck load (line of plate)	19.2 cu yd



Six heavy duty springs (compressed during ejection) return gate to digging position when cable is released.



Ejector gate wipes bowl sides and bottom clean as it rolls forward to positively eject all material. Rate of ejection is controlled.



Pusher tractor need not be accurately positioned. Bumper curved to fit dozer blade; extends sufficiently to prevent rear tire damage by pusher. Tow hook included.

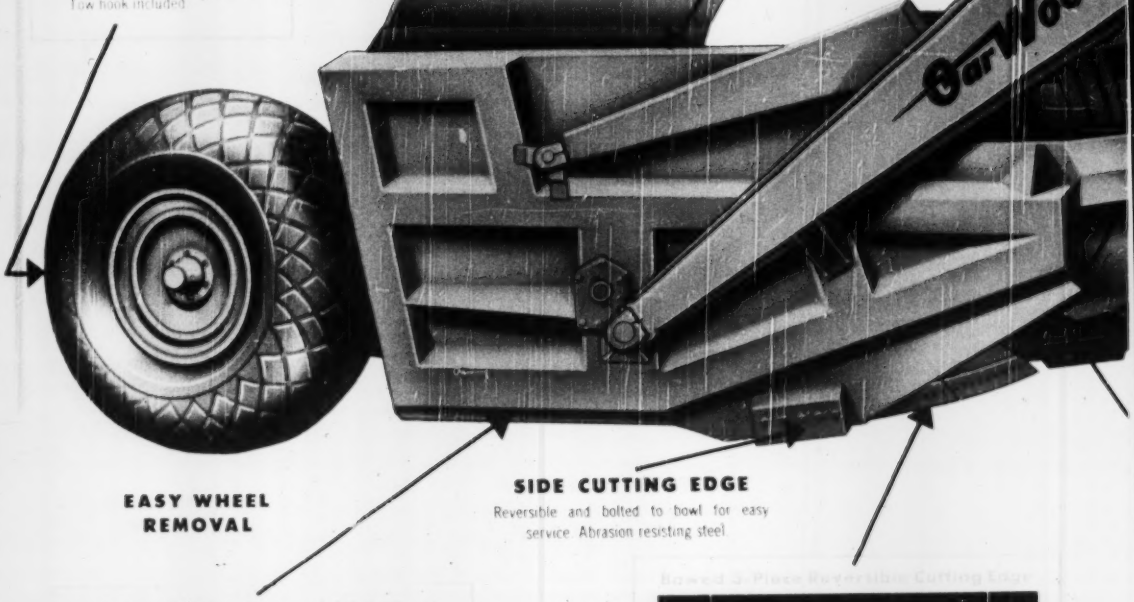

Maximum strength and rigidity are provided by all-welded construction of the double bottom with bowl sides and back.



For easier, faster digging and maximum economy. End sections interchangeable as well as reversible. Optional center extension cutting edge for hard digging.

ASK YOUR GAR WOOD—ALLIS-CHALMERS DEALER FOR A DEMONSTRATION

GAR WOOD GW INDUSTRIES

GAR WOOD INDUSTRIES, INC.
Findlay Division • Findlay, Ohio

AC

SCRAPER = New Low Costs Per Yard

All Sliding Sheave Blocks on Center-Line of Scraper

Simplified and improved reeving lengthens cable life. To keep out dirt, sheaves are completely enclosed in boxes with hinged tops for easy accessibility when servicing.



STURDY YOKE

Extra heavy construction provides greater strength and rigidity for the toughest jobs.

Rugged Ball-and-Socket Fifth Wheel

Heavy-duty 8" ball provides maximum flexibility with an abundance of strength. Has easy take-up adjustment.

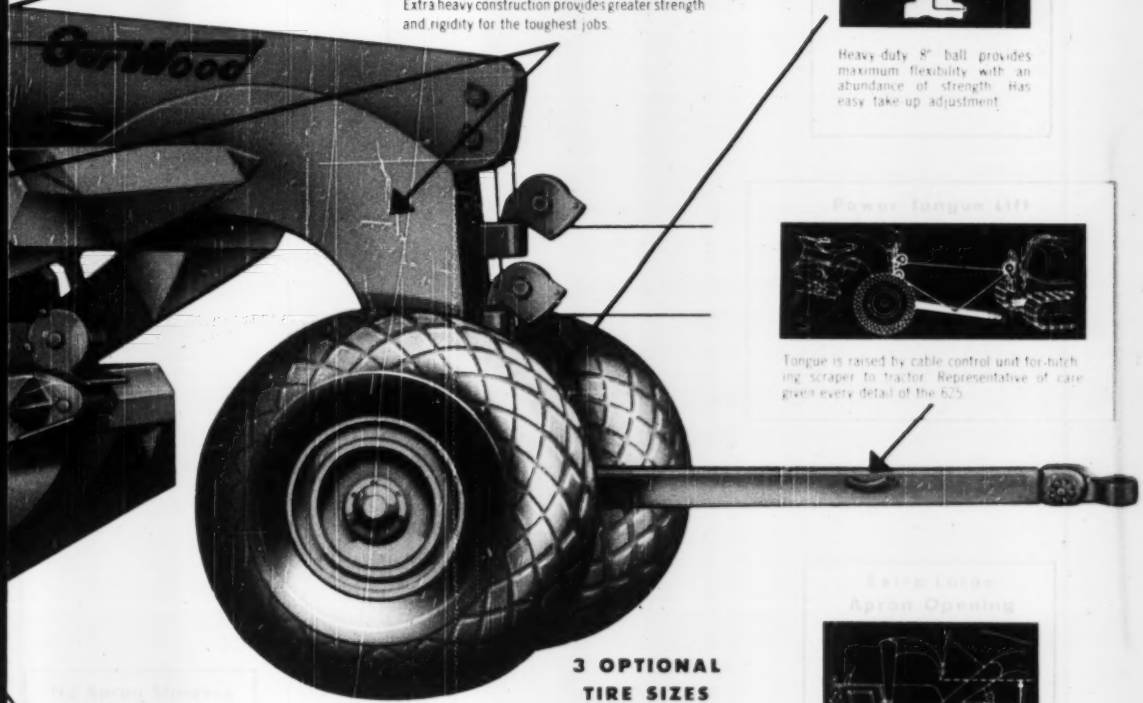

Power Tongue Lift

Tongue is raised by cable control unit for-nutching scraper to tractor. Representative of care given every detail of the 625.

3 OPTIONAL TIRE SIZES

Extra Large Apron Opening



78" apron opening with scraper in carry position is ample for positive ejection of sticky materials and large rocks.

EASIER TO SERVICE

All parts requiring service are quickly and easily accessible. Need for service has been reduced to a minimum.

Twin cable lines run from traveling sheave block to the apron equalizing hook. No sheaves in dirt.

Exceptionally Rugged Construction Throughout

SEE YOUR GAR WOOD—ALLIS-CHALMERS DEALER OR MAIL THIS COUPON

GAR WOOD INDUSTRIES, INC.
Findlay Division, Dept. 022-3
Findlay, Ohio

Please send me bulletin describing the new Gar Wood 625 Scraper.

Name _____

Company _____

Address _____

FORM P-625-3 4-50 COPYRIGHT 1950 LITHO IN USA

Digging Ditches deeper and faster

The Hyatt Roller Bearings in the transmission of Buckeye Traction Ditchers provide high-load carrying capacity, long life, quiet operation, minimum power and maintenance requirements and wide flexibility in design and assembly procedures.

Built by Garwood Industries, this ingenious machine digs ditches deeper and faster with the assurance that its Hyatt equipment will help keep it on the job continuously.

Because both machinery builders and users have come to realize that when Hyatts go in, bearing wear and care go out. Hyatt Bearings Division, General Motors Corporation, Harrison, New Jersey.

HYATT ROLLER BEARINGS

MUNICIPAL AFFAIRS

METROPOLIS OF FLORIDA'S WEST COAST—This aerial view of Tampa shows the Hyde Park section in the foreground, and across the Hillsborough River in the background is the downtown business district. At the left are the grounds of the Florida State Fair. The chief feature of the University of Tampa campus in the center is the Moorish minaretted building of the former Tampa Bay Hotel built in 1884.

Every working hour a new home is started in Tampa

The Federal Housing Administration puts Tampa, Fla., in the forefront among the leading cities of the United States in housing construction, and says that every working hour a new home is started in that city.

Located on the west coast of Florida, about midway down the peninsula, Tampa has a population of more than 200,000, and is growing fast.

To take care of expansion, Tampa is extending its municipal facilities, and right now is in the midst of a $6,000,000 sanitary sewer project, while Hillsborough County is building a $2,250,000 courthouse. The municipally-owned international airport now has concrete runways 7,000 ft long.

Housing developments

Pittsburgh, Pa.—Work starts soon on a 16-story apartment building at Sixth Ave., Bigelow Blvd. and Grant St. It will house 570 families, have a 4-story garage in the rear, and will cost $7,000,000. At Webster Ave. and Tunnel St. an 18-story apartment house will be built to house 465 families. A ramp-type garage will occupy the first three stories, with space for 250 cars. Total cost, $5,500,000.

Benton Harbor, Mich.—The local housing commission has received the approval of the city commission to proceed with the construction of a 75-unit, low-rent housing project under grant from the Public Housing Administration. For this $800,000 project, the commission will use the services of two Detroit firms, Leinweber, Yamasaki & Hellmuth, architects, and H. E. Beyster Corp., architects and engineers. Hubert Van Dongen, of Benton Harbor, is associate architect. Construction is expected to start about Sept. 1.

Columbus, Ohio—A multiple-apartment development containing 1,342 units and covering 56 acres, representing an investment of $8,800,000, will be built in Columbus, Ohio, north of E. Broad St. and west of James Road, announced Karl Kumler, district FHA director, who said funds are being provided by the New York Life Insurance Co., New York. Also figuring in the development is the O'Toole Mortgage Co., Wilmington, Del. Construction will begin soon and continue for 18 months. Four corporations will build the project. They were formed by Don A. Loftus, Cleveland real estate operator; Donald E. Ryan, executive of Investors Diversified Services, Inc., Minneapolis; and Webster R. Robinson, New York, economist. The multiple apartment development will include a total of 5,032 rooms.

Plan R.R. track relocation in Salt Lake City

The Union Pacific, Denver & Rio Grande Western and the Western Pacific railroads have announced cooperative plans for a $500,000 track relocation job that will remove rails from a mile-long stretch of streets in Salt Lake City, Utah.

Work scheduled to start soon calls for diversion of rail traffic from Sixth West Street inside a year's time, and will be featured by construction of a jointly operated traffic control and interlocking tower near South Temple and Fourth West Streets. Interchange trackage being laid will enable UP freights, Rio Grande passenger and freight trains and Western Pacific passenger and freight traffic to operate over the rails of the cooperating companies, speeding rail movements and partially cutting the traffic barrier on Salt Lake's west side.

The Union Pacific is to bear 47% of the project cost, with the WP and Rio Grande splitting the remainder of the costs for the track relocation project.

Traffic engineering awards

Nation-wide traffic engineering awards for the year 1949 were announced recently by the Institute of Traffic Engineers. All 48 states and 394 cities participated in the contest for outstanding traffic engineering achievements. Factors considered were control devices, surveys and studies, lighting, intersection design, administration, and planning.

The awards were as follows: States: Eastern region, duplicate first place award: Connecticut and Massachusetts; Southern region, 1st, Virginia, 2d, Tennessee; Midwest region, 1st, Minnesota; 2d, Wisconsin; Western region, 1st, Utah, 2d, Washington; heavy population, 1st, Michigan, 2d, California.

Cities: 1,000,000 pop. and over, 1st, Detroit, Mich.; 2d, Los Angeles, Calif.; 750,000 to 1,000,000, duplicate 1st, Washington, D. C.; and Cleveland, Ohio; 500,000 to 750,000, 1st, Pittsburgh, Pa., 2d, Buffalo, N. Y.; 200,000 to 500,000, 1st Syracuse, N. Y.; 2d, Cincinnati, Ohio; 100,000 to 200,000, Arlington, Va.; 2d, South Bend, Ind.; 50,000 to 100,000, duplicate 1st, Fresno, Calif. and Evanston, Ill.; 25,000 to 50,000, 1st, Burlington, Iowa, 2d, Belmont, Mass.; 10,000 to 25,000, 1st, Wilmette, Ill., Stillwater, Okla.

MEN AND JOBS

Neil M. McCallum has been named chief engineer of the British Columbia Public Works Department and chairman of the B. C. Highway Board, succeeding **Harry C. Anderson,** who resigned recently to become vice president and general manager of General Construction Co. at Vancouver. Mr. McCallum was formerly assistant chief engineer. **Alfred J. Bowering** becomes assistant chief engineer and a member of the highway board, succeeding him. **O. J. Wilkie,** divisional engineer at Williams Lake, becomes construction engineer at Victoria. **S. A. Cunliffe** moves from Prince George to New Westminster as divisional engineer; **D. D. Godfrey** moves from Revelstoke to Prince George as divisional engineer; **M. Struve,** resident engineer on the Hope-Princeton Highway, becomes district engineer at New Denver; **J. A. Dennison,** district engineer at New Denver, moves to Cranbrook in a similar position; **J. Hague,** district engineer at Cranbrook, is promoted to divisional engineer at Williams Lake; and **W. H. Cotton** moves from district engineer at Fernie to the same job in Vancouver-Point Grey.

L. J. Peck, left, Peck Pump and Equipment Co., Albany, N. Y., and Clyde Van Deusen, right, water superintendent, pause for a moment while checking up on the chlorinating and recirculating system for the Chatham, N. Y. open reservoir.

Federal government dredging of East Basin, Wilmington district, Los Angeles Harbor, costing $600,000 has been proposed. Millions of dollars in new construction is proposed by Board of Harbor Commissioners. Inspecting map of site, left to right: F. C. Earle, chief engineer, Los Angeles Harbor Department; Col. W. D. Luplow, L. A district engineer; Corps of Engineers, Kenneth Peal, chief of Rivers and Harbors Section; and James Jobes, chief of Civil Works Branch, Los Angeles district engineers.

Edgar W. Earle, senior civil engineer of the Erie County, N. Y., highway department, who designed and supervised the construction of county roads costing more than $25,000,000 in the last 25 years, is retiring. He joined the department in 1925 when the county's motorways system was being blueprinted. He received his degree in engineering from Union College. His first job was as a surveyor for the New York Central Railroad. Later he was an assistant engineer for the New York City Board of Water Supply. He became an assistant engineer for the New York State Highway Department, and later supervised the construction of roads in Arkansas and North Carolina.

Ralph Granger has been appointed Medina County, Ohio, engineer at Medina, to succeed the late Ralph Widdifield. Wayne Anderson, a former county engineer and a state highway division engineer, succeeds Granger as chief deputy county engineer.

Jesse L. Tygart, former construction engineer with the Plaskon division of Libbey Owens-Ford Glass Co., Toledo, Ohio, has joined Paul R. Jeffers, Inc., Toledo, heavy construction and earthworking contractors, as chief engineer.

M. Erkkila, who has been with the Minnesota highway department for 15 years, has been named city engineer of Chisholm, Minn., succeeding **Geo. T. Anderson.**

Henry Shaw, resident engineer at Wilkdoro, N. C., for the North Carolina Highway Department, has been transferred to Warrenton where he will supervise road construction in Warren County.

A. J. Rhodes is the new city engineer of Parsons, Kan. He is a graduate of Kansas State College and for the last four years has been a consulting engineer in Wichita.

S. A. Cunliffe, recently named provincial engineer at Prince George, B. C., has returned to New Westminster, to be divisional engineer for the lower mainland and coastal area, from Silver Creek to Ocean Falls. He succeeds the late O. P. Roberts.

Olney J. Hawkins of the Portland, Ore., district Corps of Engineers, has retired to become port engineer for the Koppers Co. Inc., at Zonguldak, Turkey, on the south shore of the Black Sea. He will be engaged in harbor development and jetty construction.

EDUCATION AND RESEARCH

Prof. Bruce G. Johnston

New professor of structural engineering in the department of civil engineering, college of engineering, University of Michigan, is Bruce G. Johnston, who has been a member of the civil engineering staff of Lehigh University for the last 12 years. He has been director of the Fritz Engineering Laboratory for three years.

Professor Johnston obtained his B.S. in civil engineering at the University of Illinois in 1930, his M.S. at Lehigh in 1934, and his Ph.D. at Columbia in 1938.

On leave of absence from Lehigh 1942-45, he was a structural engineer, Bureau of Yards and Docks, U.S. Navy, 1942-45, and was senior engineer and project supervisor, applied physics laboratory, Johns Hopkins University, 1944-45. In 1957 he was awarded the James R. Cross medal by the ASCE.

AIA will promote modular coordination

The American Institute of Architects, Washington, D. C., has appointed William Demarest, Jr., of New York, as secretary for modular coordination in its Department of Education and Research.

Through contacts with architects, schools of architecture, builders, manufacturers of building materials, and the Housing and Home Finance Agency, Mr. Demarest will provide a

GOOD PUMPS *for good buildings*

YEOMANS!

For all basic pumping functions in a building there are Yeomans Pumps that will give long years of quiet dependable performance.

WATER SUPPLY — Since 1898 Yeomans has been solving problems of water supply and circulation in buildings of every kind. Many thousands of successful installations emphasize the soundness of Yeomans Engineering.



CONDENSATION RETURN — Compact design and sound engineering are conspicuous features of Yeomans Pumps in heating systems. They can be depended upon for efficient performance, long life and a minimum of maintenance.

DRAINAGE DISPOSAL — For an end to troubles, install Yeomans Pumps for getting rid of drainage and seepage: Yeomans Heavy Duty Bilge Pump for liquids free from solids, and Yeomans Screenless Ejector for wastes containing solids.



SEWAGE EJECTION — Acknowledged throughout the world as approaching perfection, the trusty Shone* Pneumatic Sewage Ejector is ideal — wherever gallonage is limited and solids are not. Yeomans also builds centrifugal sewage pumps for both wet pit and dry pit installations — in sizes up to 14 inches and capacities up to 24,000 gpm.



Full information concerning Yeomans Pumps, with useful engineering data and installation drawings, is published in Sweet's Architectural and Engineering Files, and also in separate bulletins for your Data File — sent promptly on request. Use the coupon

*TRADE MARK REGISTERED U.S. PATENT OFFICE

YEOMANS

PUMPS FOR BUILDINGS, MUNICIPALITIES, INDUSTRIAL APPLICATIONS — and a complete line of Sewage and Waste Treatment Equipment

YEOMANS BROTHERS COMPANY
1445 North Dayton Street, Chicago 22, Illinois

You may send bulletins as indicated.

☐ Water Booster
☐ Drainage Disposal
☐ Water Circulation
☐ Sewage Disposal

Name _____
Firm _____
Address _____
City _____ State _____

$2,841.00 SAVED WITH Ramset

FASTENING SYSTEM

FOUR MINUTES per fastening (total time on job) with RAMSET SYSTEM instead of NINETEEN MINUTES with his old method saved this contractor $2,841.00 on one steel fastening job. Instead of slow, laborious, costly drilling - just load the self-powered, light, RAMSET FASTENING TOOL. Then READY! RAM! SET! Quick, easy, economical - and tight. *Actual fastening time, less than one minute per fastener!*

Compare *your* fastening costs into steel, concrete and other hard materials. See how much time and money you can save with the simple, lightning-fast RAMSET SYSTEM. With 65 sizes and types of drive pins and threaded studs, you can do almost any kind of construction fastening job.

Your local RAMSET Specialist will help you cut costs and show you how to "RAMSET" your way into more profitable business. Write or wire us collect for name of nearest representative.

Ramset System
SAVES TIME . . . CUTS COST
ON JOBS LIKE THESE:

Fastening—

- Wood sills to concrete foundations or walls.
- Wood nailing strips.
- Wire mesh for gunite.
- Metal or composition roofs or walls.
- Wiring and other electrical installations.
- Framework, brackets and supports to concrete or steel.

Stemco Corporation • Cleveland 16, Ohio

FASTEN FASTER, EASIER, CHEAPER WITH RAMSET



unifying factor for the further development of modular standards (the use of materials based on a 4-inch unit), and a more general acceptance and adoption of the principles of modular coordination.

Creation of this new position is a main feature of a plan to promote such coordination drawn up by a joint committee of the AIA and The Producers' Council.

Mr. Demarest is an architectural graduate of Princeton and Columbia and has been employed by Harrison & Abramovitz and Ronald Allwork, of New York; and by Naramore, Bain, Brady, and Johanson, of Seattle.

Educational Notes

New Engineering building — At the University of Illinois recently, a new mechanical engineering building costing about $1,500,000 was dedicated in the presence of 300 engineers and educators representing all phases of engineering activity throughout the country. Guest speaker was Prof. W. C. Huntington, head of the department of civil engineering and chairman of the university's building program committee.

Laboratory manual — Unification of many instruction books for engineering laboratory equipment has been accomplished at the University of Detroit, where Prof. Herman F. Mayrose, director of the department of engineering mechanics, has published a special "Engineering Mechanics Laboratories" manual. Explaining the need for unification, the author says: "College engineering laboratories contain many complicated machines and instruments. As each of these is purchased, instructions for its use come from the builder or are written by some member of the faculty. These books come in all sizes and shapes, and as they are in constant use they are rapidly worn out and must be replaced frequently.

Research foundation — The Wisconsin Alumni Research Foundation is a non-profit corporation which obtains its funds from royalties on patents assigned to it by University of Wisconsin professors. Since its organization in 1925, the foundation has provided more than $4,500,000 in research grants-in-aid to the university.

President Harvey Nathaniel Davis, of Stevens Institute of Technology, Hoboken, N. J., has notified the board of trustees of his desire to retire as of Sept. 1, 1951, when he will have served as president for 25 years.

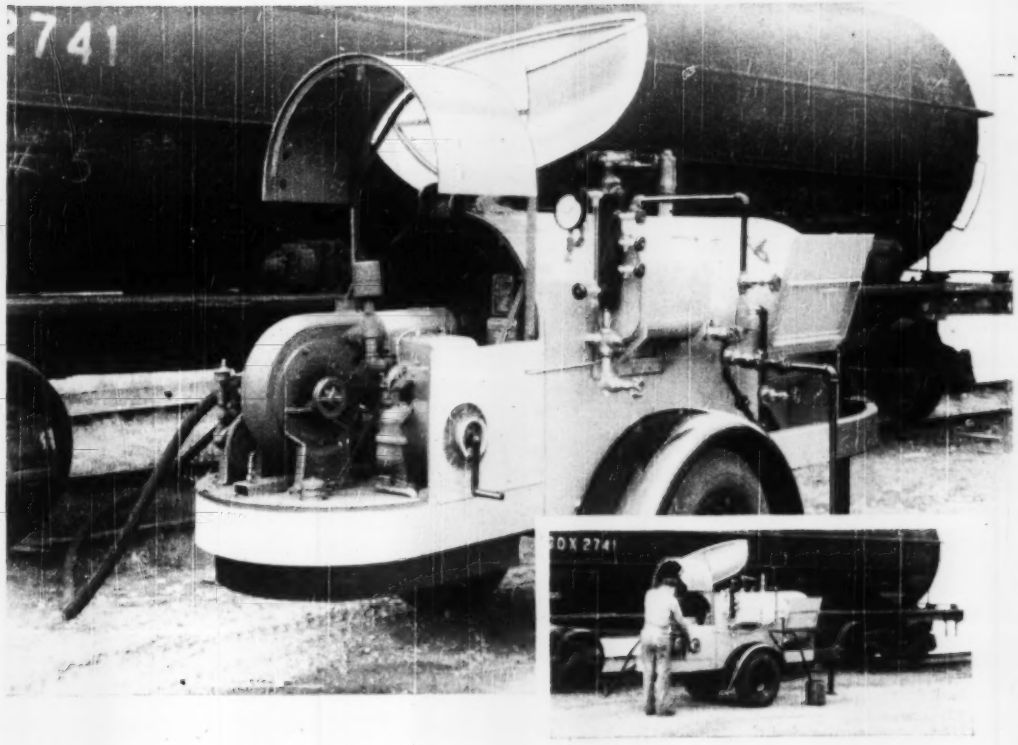

FAST STEAMING—FOR FAST TANK-CAR HEATING

Trailer or Truck Mounted for Quick Job-to-Job Transport

Working Mate to the Tank-Car Heater — The Pumping Booster





. . . Use Less Fuel—Water—Work With a CLEAVER-BROOKS Mobile Tank-Car Heater

Designed for fast steaming, the Cleaver Brooks gives you 125 lbs. steam pressure in 20 minutes — the only tank car heater with the fuel saving four-pass flue travel construction. No water problem — full condensate recovery and return to heater under pressure.

Built for full capacity — full time work — available in three sizes, skid or trailer mounted 1 car heater (17 bhp) — 2 car heater (28 bhp), 3 car heater (42 bhp). Write for the Cleaver-Brooks Tank-Car Heater Catalog.

CLEAVER-BROOKS COMPANY
389 E. Keefe Avenue, Milwaukee 12, Wisconsin

Cleaver-Brooks

BUILDERS OF EQUIPMENT FOR THE GENERATION AND UTILIZATION OF HEAT

On the Concourse

Architect
H. Herbert Eiben, New York
Engineer
S. Friedman, New York
Steel Fabricated and Erected by
Grand Iron Works, Inc., New York

Located at 930 Grand Concourse, in upper New York City, this recently-erected structure is known as the Ashley Apartments. Its three 11-story buildings contain 114 apartment units, varying in size from 2 to 5½ rooms. The structure includes spacious roof gardens and terraces, and dropped living rooms, and has steel-framed windows throughout. Its lower floors are devoted almost wholly to doctors' apartments.

Beneath the cream-color exterior of the Ashley Apartments stands an 800-ton steel framework of Bethlehem Structural Shapes.

BETHLEHEM STEEL COMPANY, BETHLEHEM, PA.

On the Pacific Coast Bethlehem products are sold by
Bethlehem Pacific Coast Steel Corporation
Export Distributor: Bethlehem Steel Export Corporation

Bethlehem
STRUCTURAL SHAPES

★ BETHLEHEM STEEL ★

OBITUARY

Henry H. Kranz, 63, city engineer of Cincinnati, Ohio, for 12 years, died June 10, shortly after speaking at a dinner meeting in the Hotel Sinton. He was a graduate of the college of engineering of the University of Cincinnati. From 1917 to 1919, he served as a captain in the U. S. Army, Corps of Engineers. In the last few years he had supervised the planning of many important city improvements.

Edward M. Lowe, 59, of Horsham, Pa., died June 8 in Chicago. He was associated with the engineering firm of W. J. Harbers and Co. of Telford, Pa. for a short period before his death. Prior to that he had been a construction engineer with Swift and Co.

Baxter Hunter Bruce, 62, smoke regulation engineer of Akron, Ohio, died June 8. Captain Bruce was retired in 1944 after 41 years in the U. S. Navy. He was a graduate of the Naval Academy in 1917.

Elmer Bisbee, 67, former construction engineer with Consolidated Western Steel and noted for his work in engineering mile-long assembly systems for heavy bomber production during World War II, died June 7 in Los Angeles. Bisbee was also co-owner of the Industrial Construction Co., Los Angeles. He retired from active service with Consolidated five years before his death. He was graduated in structural engineering from the University of Minnesota.

Taggart, Aston, 76, civil engineer and former president of the Engineers and Architects Institute, died at Los Angeles, Calif., June 5. After engineering experience in South Africa, he went to California many years ago. His work has included surveys and reconnoissances for railroads in California and Oregon; city planning and subdivision in California; surveys and plans for port terminals. Much of his later life was devoted to harbor improvements, having been called upon in a consulting capacity for studs of harbors at Los Angeles, Grays Harbor, Seattle, Everett, Wash., Bellingham and Blaine, Wash., and other ports along the Pacific Coast and in Central America. In competition with eight other American engineers, he won an international harbor planning contest in 1928-29 for the design of the new Free Port for Barcelona, Spain, which included breakwaters, drydock, extensive wharfage, warehouses, factories, and port terminals.

Century

CONSTRUCTION SEISMOGRAPH

A low cost, portable refraction seismograph for civil engineering and allied industries.

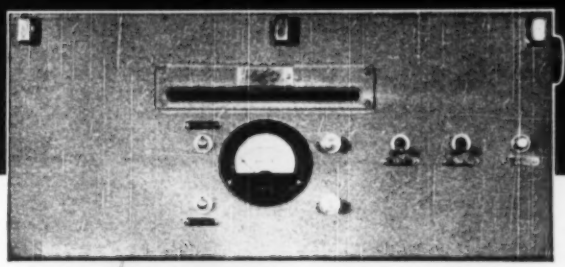

The Century Construction Seismograph has been developed expressly for the civil engineering industry where information concerning sub-surface conditions is imperative.

The Century unit will give a fast, accurate survey to determine depth of bed rock below overburden; water table; width, depth and direction of old river beds; location and size of gravel deposits and other valuable information necessary for construction and excavation projects.

Unit can also be used for measuring vibration and for recording of natural frequencies of buildings, bridges, dams, etc.

Complete set of portable equipment consists of:

Century Seismometers
Century Cable and Reel
Century Amplifiers
Century Oscillograph
Century Daylight Developer

Write for Catalog No. 103

Century GEOPHYSICAL CORPORATION
TULSA, OKLAHOMA
EXPORT: 149 Broadway, New York

The Building — E. I. DU PONT DE NEMOURS & CO. (INC.) . . . ORANGE, TEXAS

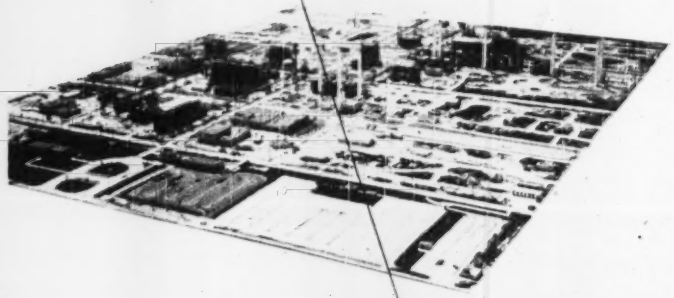

THE ARCHITECTS and BUILDERS
E. I. Du Pont de Nemours & Co. (Inc.)

The Pile . . .

31,197 Ft. of MacArthur Cased Concrete Piles . . .

To meet their own exacting specifications for sound foundation construction, the Du Pont architects and engineers called for Mac Arthur cased concrete piles for their Orange, Texas plant.

This Du Pont plant is another of the thousands of examples where building factors have found it 'pays to put it up to Mac Arthur.'

Whether your pile requirements call for cased or cast concrete, composite, wood, steel or pipe piles, you will find the 40 years of Mac Arthur experience will pay off for you, too.

Free Booklet

Learn more of the MacArthur story. You will find it in an eight page booklet available to you. Information about piles, equipment, and jobs is yours for the writing—just ask for Mac ARTHUR.

THE MacARTHUR CONCRETE PILE CORPORATION
18 East 48th Street, New York 17, N. Y.
New Orleans — Cincinnati — Boston

ELECTIONS AND ACTIVITIES

Clarence Buell has been elected president of the Oneida-Mohawk Valley Chapter, New York State Society of Professional Engineers. Others elected were: First vice-president, Leo LaRow; second vice-president, Earl Swing; treasurer and financial secretary, Foster Ringrose; secretary, Carl A. Zanjohn; directors for three years, Lawrence Griswold and Theodore Murnane.

Kenneth G. Larson was elected president of the Central New York Chapter of the New York Society of Professional Engineers at the annual chapter meeting in Syracuse, N. Y. Others elected were Victor E. Hall, vice-president; Paul F. O'Neill, secretary-treasurer, and Wilfred H. Sharrer, Robert W. Oertel and Richard M. Connick, directors.

William J. Hedley, assistant chief engineer, Wabash Railroad Co., is the new president of the Engineers' Club of St. Louis, Mo. A past president of the St. Louis Section of the American Society of Civil Engineers, Mr. Hadley succeeds R. Earl Salveter, executive vice-president, Woermann Construction Co., as president. Other officers: First vice-president, M. D. Dawson; second vice-president, N. J. Campbell; third vice-president, E. E. Bloss; treasurer, H. S. Miller; and W. E. Bivan, secretary.

Ray Soule, Burlington, Vt., has been elected president of the New England Building Officials. Others: first vice-president, Fred Ripley, New Bedford; second vice-president, Warren McDonald, Portland, Me.; third vice-president, Paul Caros, Dover, N. H.; fourth vice-president, Arthur Rutherford, Hartford, Conn.; secretary, John L. Riley, superintendent of construction, Boston; and treasurer, Lawrence M. Hubbard, Wethersfield, Conn. The group voted to create a legislative committee to collaborate with state legislatures in screening all legislation that has to do with building laws and to prevent enactment of impractical construction legislation. This committee will be headed by Chairman Gordon Robinson, Springfield, Mass. Eugene Quinlan and Murray Phalski, Boston, have been named legislative agents.

Topics discussed at the recent fourth annual Florida Highway Conference at Gainesville under the sponsorship of the department of civil engineering of the University of Florida included: Parking, soil stabilization and compaction, surfaces for low-cost roads, air-entrained concrete and highway soil engineering. Groups represented at the conference included the State Road Department, Bureau of Public Roads, County and City officials and engineers, contractors, materials and equipment people and many others.

Wayne E. Edwards of Endwell, N. Y., has been elected president of the newly-organized Southern Tier Chapter of the National Association of Home Builders. Other officers elected were: vice president, Frank J. Placek, Johnson City; secretary, Fred Kurs, Vestal, and treasurer, Franklin B. Borden, Binghamton.

John H. Pattison, Kitsap County Engineer at Port Orchard, Wash., has been elected president of the Washington State Association of County Engineers. Donald B. West of Chelan County will serve as vice-president and L. W. Poutto of Pacific County, as secretary-treasurer.

MAJOR MEETINGS

Annual Conference on the Small Community, Yellow Springs, Ohio, June 30-July 2.

American Society of Civil Engineers, annual convention, Royal York Hotel, Toronto, Ont., July 12-14.

Maine Water Utilities Association, summer meeting, Mt. Desert Island, Me., Aug. 9.

ASCE, North Carolina section, joint meeting with N. C. Society of Engineers, Wrightsville Beach, N. C., Aug. 18-19.

Pennsylvania Water Works Operators' Association, annual conference, Nittany Lion Inn, State College, Pa., Aug. 21-22.

Pennsylvania Sewage & Industrial Wastes Association, Nittany Lion Inn, State College, Pa., Aug. 23-25.

N. Y. Section AWWA, fall meeting, Syracuse Inn, Syracuse, Lake, N. Y., Sept. 7-8.

W. Va. section AWWA, annual meeting, Prichard Hotel, Huntington, W. Va., Sept. 13-14.

American Railway Bridge and Building Association, annual meeting, Hotel Sherman, Chicago, Ill., Sept. 18-20.

N. Y. Metropolitan section, Institute of Traffic Engineers, 25th annual meeting, Commodore Hotel, N. Y. City, Sept. 24-27.

American Institute of Park Executives, annual convention, Baker Hotel, Dallas, Tex., Sept. 25-28.

Stud Welding gets it On!

BETTER
FASTER
AT LOWER COST





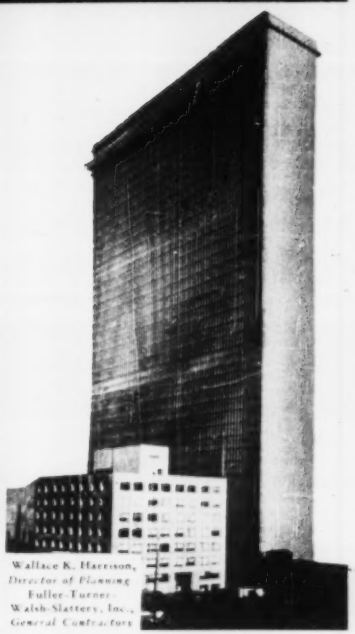

Wallace K. Harrison,
Director of Planning
Fuller-Turner-
Walsh-Slattery, Inc.,
General Contractors

U. N. Building's 5400 Windows Secured with NELSON STUDS

Use of trigger-quick stud welding for installing floor-to-floor aluminum window frames in the spectacular U. N. Secretariat Building eliminated the necessity for drilling and tapping approximately 5,000 holes. Short steel I-beam sections, cast in concrete, serve as anchorage for the Nelson flux-filled studs which secure the frames at the ceiling and floor.

Whenever a material's to be fastened to steel, use the Nelweld method and do the job better, faster, at lower cost.

Roofing and siding materials—corrugated steel, aluminum, protected metal and asbestos-cement—are installed at substantial savings with Nelson stud welding. Installation is stronger, neater and safer by this remarkably fast topside method which is now recommended by leading material manufacturers.

No capital investment required—Nelson stud welding equipment may be rented, at small cost, from Nelson Authorized Dealers. Nationwide field engineering service.

SEND FOR BOOKLET
"Nelson Stud Welding in the Construction Industry"

NELWELD

Nelson Stud Welding
DIVISION MORTON GREGORY CORPORATION
2762 TOLEDO AVENUE LORAIN OHIO

"BERG"
CONCRETE SURFACER
MODEL A



"Berg" equipment is used extensively for surfacing and finishing applications on concrete construction.

The many "BERG" Models available, permit exact selection for your particular application.

The distinctive "BERG" features give you the kind of results that are realized in better quality work, combined with lower costs.

"BERG" Heads and Attachments are interchangeable, thereby providing adaptability for vibrating, wire brushing, sanding and polishing applications.

THE CONCRETE SURFACING MACHINERY CO.
4667 SPRING GROVE AVE.
CINCINNATI 32, OHIO

Hayward Buckets

Use this Class "E" Clam Shell Bucket for handling crushed stone, gravel, sand and other bulk materials.
THE HAYWARD CO., 48-50 Church St., N. Y.

McKIERNAN-TERRY
Wide-Range Line of
PILE HAMMERS *and* **EXTRACTORS**

Now made in complete, standardized line of 10 double-acting hammers, 5 single-acting hammers and 2 double-acting extractors.
Write for free descriptive Bulletins.

Also builders of coal and ore bridges, bulk material unloaders, bridge operating mechanisms, hoists and marine equipment, and specially designed machinery.

McKIERNAN-TERRY CORP.
13 Park Row, New York 7, N. Y.

UNIT PRICES BID BY CONTRACTORS

Elevated water tank, Davis Dam, Ariz.-Nev.

Four bids, April 6, 1950, on the 75,000 gal elevated water storage tank ranged from $24,976 to $31,200, erection time 180 calendar days. This is a range of 33.3 to 37.2 cents per gal of capacity. This is for furnishing, erecting, testing, obstruction lighting and painting water tank for fire protection and domestic water system, Colledge substation, Davis Dam project, Arizona-Nevada.

The tank shell, bottom and roof are welded, the tower and balcony may be welded or riveted at option of contractor. The tank bottom is elliptical, or similar but not hemispherical, capacity 75,000 gal between high and low water lines. The tank must be designed for earthquake resistance. Height is 110 ft to bottom of tank capacity.

Minimum wage rates are: structural iron workers $2.225, welders same, carpenters, $2.10; electricians, $2.25; laborers, $1.45; painters, brush, $2.00, spray, $2.175; steel and bridge, $2.25; plumbers, $2.25, equipment operators, shovels, cranes and derricks, $2.225, air compressors $1.775.

Bidders were:

1 W. E. Caldwell Co., Inc., Louisville, Ky.	$24,976
2 Pittsburgh-Des Moines Steel Co., Santa Clara, Calif.	27,890
3 Allison Steel Mfg. Co., Phoenix, Ariz.	29,995
4 Chicago Bridge & Iron Co., Los Angeles, Calif.	31,200

Concrete highway relocation for Wolf Creek Dam, Ky.

A new U. S. 27 route through Pulaski County, Kentucky will cost $394,213. It will replace the highway that will be inundated by the Wolf Creek Dam reservoir. H. H. Sandusky is district engineer at Somerset, Ky. for the State Highway Department.

Bids were taken March 31, 1950 on 3.675 mi of portland cement concrete pavement. They brought in unit prices below the average low bids of the past 2 years on 9 items and above the average low bids for the past 5 years on 10 items. The lower prices were on clearing and grubbing, concrete, integral curb, borrow, structural excavation, unclassified and common, man holes, 12" CM pipe, 18" and 24" RC pipe, concrete sidewalk and water supply. The higher unit prices are for removing sidewalk, roadway and shoulder trench excavation, 18" and 24" CM pipe, 15" & 30" RC pipe, scarifying and reshaping and steel reinforcing. Low bid unit prices for this job are shown here two ways, 1. compared with average low bids for 1947, '48, and '49, and 2. compared with the second low on this job.

Work must be completed in 200 calendar days. The Southern Railway is adjacent to the job. Wage rates are: for skilled labor $2.00 to $2.20, semi-skilled $1.75 to $2.00, common $1.00 an hour. The low bid was 2.5% below the second low and 16% below the high bid.

Unit price trends—Kentucky

Item	Dec. 1947	Dec. 1948	Dec. 1949	US 27 5-'50
Clear & grub	ac	$82 58	$67 79	$81 76	$60 00
Concr, Cl A	cy	42 19	45 58	46 84	45 00
Conc steps, rem	cy	.....	.....	8 13	5 00
Curb integral	lf	.48	.77	1 18	.50
Excavation					
Roadway	cy	.60	.57	.56	1 03
Borrow	cy	.43	.32	.51	.25
Trench, shldr	cy	.73	.50	.71	.75
Struct, uncl	cy	3 51	3 89	6 03	5 00
Struct, com	cy	5 07	8 83	5 25	4 00
Struct, rock	cy	10 12	10 65	9 33	10 00
Final dressing	sta	20 42	20 48	20 02	20 00
Limestone, insul cr #6, #610	ton	.....	.....	2 62	2 25
Manholes	ea	190 36	221 48	325 00	220 00
Pav, cmt concr	sy	3 05	4 23	3 09	3 74
Remove	sy	1 20	.85	.....	.50
Pipe entr					
CM-15"	lf	2 33	2 36	2 44	2 30
CM-18"	lf	3 17	3 08	3 05	3 25
CM-24"	lf	3 92	4 13	4 15	4 50
Pipe culv					
RC 15"	lf	2 70	2 99	2 55	3 20
RC 18"	lf	3 23	3 42	3 55	3 00
RC 24"	lf	4 52	4 64	4 88	4 50
RC 30"	lf	6 54	6 47	6 90	9 00
Proj monumts	ea	25 32	26 20	30 81	35 00
Scarif & reshap	sy	.08	.08	.06	.15
Sdwk, concr 4"	sy	2 97	3 17	3 35	3 20
Remove	sy	.33	.45	.43	.70
Steel reinf	lb	093	.106	06	11
Water	100 gal	.09	.07	.10	05

Bidders on relocation of U. S. 27 were:

1 Fuller-Davies Co., Covington, Ky. (contract)	$394,213 01
2 Codell Constr Co., Inc. Winchester, Ky	404,453 08
3 Foster & Creighton Co. Nashville, Tenn	407,389 47
4 Kelly Constr. Co. Louisville	468,100 19

Items, US 27, May, 1950		Quantity	Unit Prices 1C	2
Clear & grub	ac	22 59	$60 00	$45 00
Rdway excav	cy	91,425	1 05	0 89
Borrow excav	cy	12,721	.25	.35
Struct excav, com	cy	80	4 00	4 00
Unclass	cy	615	5 00	4 50
Solid rock	cy	40	10 00	10 00
Rem concr pave	sy	1,900	.50	.50
Adj curb & gutr box inlet				
18" type 2	ea	4	40 00	50 00
24" type 2	ea	2	50 00	50 00
Curb & gutr box inlet				
15" type 2	ea	5	200 00	275 00
18" type 2	ea	1	275 00	275 00
4" concr sdwk	sy	1,750	3 20	4 00
Scar & reshap	sy	200	.15	.10
Manhole	ea	1	220 00	450 00
Adj mh to grade	ea	2	75 00	40 00
Water	100 gal	2,420	.05	.10
Proj monuments	ea	2	35 00	30 00
Final dressing	sta	194	20 00	20 00
Rem concr sdwk	sy	10	.70	.25
Rem concr steps	cy	1	5 00	25 00
Cl "A" concr	cy	131 81	45 00	48 00
Steel reinf	lb	8,470	.11	.12
Pipe				
15" culv, CM	lf	144	2 30	2 25
18" culv, CM	lf	24	3 25	3 00
24" culv, CM	lf	24	4 50	4 25
18" culv CM	lf	100	3 25	3 00
24" culv CM	lf	39	4 50	4 25
18" spec. culv	lf	220	4 00	3 75
24" spec. culv	lf	52	5 50	5 35
15" culv, RC	lf	579	3 20	2 50
18" culv, RC	lf	747	3 60	3 60
24" culv, RC	lf	96	4 50	4 15
30" culv, RC	lf	18	9 00	7 50
Cr limest insul	ton	6,890	2 25	2 15
Cr limest entr	ton	370	2 25	2 15
Cmt concr pave	sy	63,154	3 74	4 15
Integral curb	lf	10,762	.50	.25
Rdway excav for shoulder matr	cy	10,000	.75	.50

CONSTRUCTION REPORTS

Bids Asked—Low Bidders—Contracts Awarded

Compiled by Business News Department—Engineering News-Record, 330 W. 42nd St., New York 18, N. Y.

ELSIE EAVES, Manager — *J. A. MAHONEY, Reports* — *M. R. ROESSLER, Statistics*

WATER SUPPLY

BIDS ASKED

Ont., New Hamburg—(B. A. 7/4)—C. Dagnal, Town Hall Wtr. Sys., Inc., 2,500,000 gal. stor. water tank, etc. Plans deposit $10. to C. H. Neely, 234 Avenue Rd., Toronto, engr.

Ark., Magnolia—(B. A. 7/7)—City, Water Comm., Municipal erecting $70,000 gal. water tank; water system improv.; $160,000. Plans deposit $10. Marion L. Dyer & Assoc., Un. Life Bldg., Little Rock, engrs. CD 5/20.

La., Iota—(B.A. 7/7)—Town, distr. sys. extension; addns. Plans deposit $5. Burpee & Burk, Trust Bldg., Baton Rouge, engrs.

Tex., Childress—(B.A. 7/10)—City, Bldg. Insp. Co. pump, motor, pumping & connection units. Approx. $40,000. Plans deposit $10. to J. Hunt, 541 Naus. Bldg., Wichita Falls, engr. CD 2/16.

Fla., Fort Lauderdale—(B. A. 7/10)—At office City Auditor, 2nd floor, Fort Lauderdale, installing one 400,000 gal. elevated steel water tank of tubular tower construction for wtr. sys. Plans deposit $25., P. O. Banking, City Engr., apt. 6, 6/27.

▲† Tenn., Tullahoma—(B.A. November)—U. S. Eng., Tullahoma, 90 x 400 ft. pumping station for river water with maximum output 492,000 gal./1 minute; constructed to pump cooling water for Arnold Engineering Development Center near mouth of Hurricane Creek, approx. 2 mi. from dam near Estill Springs on Elk River. Approx. $3,000,000. CD 11/14. Senter Rucker Buildings.

Tex., Galena Park—Bids Asked. Frank Teague, Paul E. Wolf & R. A. McWilliams, Jr., Natl. Bank Bldg., Houston, water lines facilities, $40,000. Stramler & Miller, Main Bldg., Houston, engrs.

LOW BIDDERS

Ga., Atlanta—(B. 6/27)—City, June 12, elevated steel water tank from College Bridge & Iron Co., Healey Bldg., $255,275. CD 5/24.

Mass., West Boylston—Town Water Comrs., West Boylston, laying 4 mi. water mains, etc., from Caldwell & Shea, Inc., 24 Lelund Ave., Leominster, $35,545.

CONTRACTS AWARDED

Pa., Bristol—Bristol Boro., Bristol, 2 concrete water tanks, to Tri County Constructors, Exton, Pa., $32,302. William H. Eisenmann, 326 Walnut St., Philadelphia, engr.

R. I., Warwick—City, Bd. Water Comrs., Warwick, 3,750,000 ft. 6- to 12-in. water mains, Potowomut Neck, to Sarr & Jordan Constr. Co., 1240 Elmwood Ave., Providence, $122,235. Est. $139,000. BAB 6/15. CD 5/29.

Tex., Woodville—City, water lines improv. Purchase and Hire. Approx. $30,000.

Va., Exmore—Town, elevated steel water tank, to Chicago Bridge & Iron Co., 1700 Walnut St., Philadelphia, Pa., $50,000. Bids 4/25. CD 4/12.

SEWERS, WASTE DISPOSAL

BIDS ASKED

Minn., St. Louis Park—(B.A. 7/3)—Village, C. Jonas Ck., St. Louis Park. Approx. 14,977 lin. ft. 8-in. sewer; 62 standard manholes; 2 drop manholes; 200 lin. ft. 30-in. concrete sewer; sewer improv. Dist. 2, Sanitary Sewer Div. 2-M. $50,000. P. S. Smith, St. Louis Park, village engr. CD 1/26/50.

Ont., Port Credit—(B.A. 7/3)—Township, Clerk, sewage treatment plant. Approx. $75,000. Plans deposit $25. W. J. Anderson, civil & sanitary engr. CD 5/25/49.

Kan., Beloit—(B. A. 7/5)—City, office City Clerk, Beloit, sanitary sewer extns., incl. 700 lin. ft. trench and backfill; 700 lin. ft. 8-in. with clay pipe line, 28 vitr. clay wyes, & 1/8 bend; 1 standard manhole, 2 shallow manholes, 2 lin. ft. extra manhole depth, 14 sq. yd. replacement of hard surface. Plans deposit $5, refundable. $2,550. Wilson & Co., 223 N. Santa Fe St., Salina, engrs.

Tex., Hamlin—(B.A. 7/5)—City, City Hall, 900 Brazil St., approx. 1 mi. sani. sewers, Southside outfall sewer, approx. 1 mi. portion Rose Bud. $111,000. Lt. Fuselier, city engr. CD 5/24/49.

Tex., Petersburg—(B.A. 7/5)—City, treatment plant, lines, $78,302. Plans deposit $25. Haskell & Green, Wilson Bldg., Lubbock, engrs. CD 12/14/49.

Fla., Jacksonville—(B.A. 7/6)—City, City Hall, incinerator, garbage disposal sys. equipment, $750,000. Reynolds, Smith & Hill, 227 Park St., Zone 1, engrs. CD 5/2.

Fla., Tampa—(B. A. 7/6)—City, City Hall, intercepting sewers and force mains. Plans deposit $25., Greeley & Hansen, 220 S. State St., Chicago, Ill., engrs. Extension date. CD 6/2.

Mo., Farmington—(B.A. 7/6)—City, J. C. Moore, mayor, sewage treatment plant, incl. auxiliaries, appurtenances, etc. Extended date. Charles A. Hawkins, Finance Bldg., Kansas City, Mo., engr. CD 4/25.

Pa., Ellwood City—(B.A. 7/6)—Ellwood City Boro. Bldg. Bldg., Ellwood City, general contract sewage treatment plant, addns., improv. Contr. 2, electrical work. Plans deposit $25., CD 2/10/46.

Tex., Bastrop—(B.A. 7/6)—Harris County Fresh Water Dist. No. 2, c/o Troy E. Peterson, Bastrop, sewage treatment plant, brick, concrete pump house. Approx. $60,000. Plans deposit $25. Joe H. Reed, 611 Insurance Bldg., Fort Worth, engr. CD 12/24/49, under LB.

Tex., Stephenville—(B. A. 7/6)—City, R. N. Pittman, mayor, Stephenville sewage treatment plant, $53,300; plans deposit $10. Freese & Nichols, 407 Daniger Bldg., Fort Worth, engrs. CD 12/1/49.

Fla., Tampa—(B. A. 7/7)—City, City Hall, pump stations and ejector stations, sewer improv. Plans deposit $25., Greeley & Hansen, 220 S. State St., Chicago, engrs. CD 3/30/49.

N. Y., New Rochelle—(B. A. 7/7)—At office E. H. Feldman, Jr., P. Wks., Bureau of Engineering, 28 North Clk. Rd., Contr. 1, general contr.; Contr. 2, electrical work for refuse incinerator for burning brush and hedge clippings at the Municipal Incinerating Plant. Plans deposit $10. Havens & Emerson, 1414 Woolworth Bldg., 233 Broadway, New York, Zone 7, engrs. CD 9/9/48.

Ont., Tillsonburg—(B.A. 7/8)—Mayor and Council, Town, sewage pumping station and sewage pump, station on Broadway Ave. North area, $76,000. Plans deposit $50. Gore & Storrie, 2230 Bay St., Toronto, engrs.

Calif., Indio—(B.A. 7/10)—Indio Sanitation Dist., City Hall, 5 miles sewer, including approx. 72,000 lin. ft. 8- to 18-in. sewer lines, approx. $100,000. Plans deposit $50., sewer lines; deposit $100,000., Plans deposit $50, sewer treatment plant. Reynolds, Smith & Hill, 1206 Keeler Bldg., Los Angeles, engrs. CD 3/22/49.

Tennessee and Virginia—(B.A. 7/11)—Tenn. Valley Auth., and Bristol, Va., 445,000 lin. ft. 8 to 42-in. sewers, 8 sewage pump stations, 6 mgd. activated sludge treatment plant. Plans deposit $50 for sewers, $25 plant and pump stations. Wilkinson & Stapleton, P. O. Box 1328, Atlanta, Ga., engrs. CD 4/4.

Calif., Los Angeles—(B.A. 7/13)—City, Bd. P. Wks., City Hall, 0.10 mi. 8- to 15-in. sanitary sewers in Alverno Dr. and Wilton Ave. Sewer Dist. $215,000. CD 5/17.

Ont., Strathroy—(B.A. About end of August)—Town, Mayor Arnold Pearson, sewerage sys. $176,000. CD 5/3/49.

Tex., Galena Park—Bids Asked. Frank Teague, Paul E. Wolf & R. A. McWilliams, Jr., Natl. Bank Bldg., Houston, sanitary and storm sewers. Bell-Scott-Simon & Miller, Main Bldg., Houston, engrs.

SOON LETS CONTRACT

Pa., Marcus Hook—Conshohocken Nairn, Inc., Marcus Hook, soon lets contract incinerator Bldg. 106. Approx. $60,000. H. A. Kenyon & Co., 1200 N. Broad St., Philadelphia, engrs.

LOW BIDDERS

Calif., Oakland—East Bay Municipal Utility Dist., 512 16 St., June 9, sludge collecting equip. for East Bay Sewage Treatment Plant. Spec. 32,444, from Chain Belt Co., 1600 W. Bruce St., Milwaukee, Wis., $90,036. Engr., Consor Engineering.

Calif., San Jose—Santa Clara County Sanitation Dist. 2, Courthouse, June 12, 4,000 lin. ft. 10- to 18-in. vitr. clay pipe sewer between McKee Rd. on N-B and Alum Rock Ave. on St. from White Rd. to a point near here, from San Leandro Constr. Co., 16411 E. 14 St., San Leandro, $110,442. CD 6/1.

CONTRACTS AWARDED

N. J., Asbury Park—City Council, sewer outfall line from treatment plant to ocean, including 92 Pneumatic to Thomas Procter Co., Long Branch, $76,000. Est. $65,000. CD 1/4/46.

N. Y., Merrick—Town, Town Hall, Hempstead, Type A furnace under Dr. D. Town of Hempstead Refuse Disposal Plant, to Marie Bogger Destructor Co., 205 E. 42 St., New York, Zone 17, $442,446. Bids 6/6. CD 6/1.

▲ N. Y., Rockaway—Dist. Pub. Wks., Municipal Bldg., New York, Zone 7, sewage treatment plant fronting Jamaica Bay at Beach 108 St., to Merritt-Chapman & Scott Corp., 17 Battery Pl., New York, $3,248,966. Metcalf & Eddy, Engineers, Statler Bldg., Boston 16, Mass., consulting engrs. CD 5/17.

Tex., Houston—Chocolate Bayou Estates, 745 First Natl. Bank Bldg., sewage treatment plant, to Farnsworth & Chambers, Inc., Box 74, $68,700. E. S. & Robert M. Atkinson, 745 First Natl. Bank Bldg., engr.

BRIDGES

BIDS ASKED

▲ Calif., Long Beach—(B.A. 7/6)—City Harbor Dept., Pier A, Embarkadero St., Anaheim St. Bridge, across Los Angeles Flood Control Channel, $1,500,000. F. C. Ansel, mgr. CD 3/24.

LOW BIDDERS

Massachusetts—Commonwealth of Mass., Dpt. P. Wks., Boston, May 31, steel plate girder bridge approaches, Dept. St., North Adams, and steel truss bridge with deck approaches, Great Barrington, from Peterson Steel Corp., 14 West 23 St., Bayonne, N. J., $136,124 and $90,170, respectively. CD 5/17.

▲ New Jersey—New Jersey Turnpike Auth., 65 Prospect St., Trenton, June 15, Contr. 11, 4 steel, concrete structures, cross street paving and incidental work in connection with constr. sect. 2, Gloucester, Camden and Burlington counties, from Francis A. Caruso & Son, 804 S. 12 St., Phila., Pa., $1,747,280. CD 5/31.

New Jersey—New Jersey Turnpike Auth., 65 Prospect St., Trenton, June 15, Contr. 10, substructures and superstructures Belleville Turnpike overpass south of Passaic River and D.L. & W. R.R. overpass and north of Lower Rd., etc., Belleville, Hudson Co., from Koppers Co., Inc., Metal Products Div., Bush and Hamburg Sts., Baltimore, Md., $170,825. CD 5/24.

CONTRACTS AWARDED

▲ New Jersey—New Jersey Turnpike Auth., 64 Prospect St., Trenton, Zone B, Contr. 19, 14 steel, reinforced bridges with incidental grading, drainage paving in connection with constr. sect. 3, Mercer, Lawrence, Hamilton and Mercer Counties, to George M. Brewster & Son, Inc., 27 W. Fore Lee Rd., Bogota, $1,763,277. Bids 6/8, awarded 6/20. CD 6/12, under LB.

† Oregon and Washington—U.S. Eng., 19 E. Poplar St., Walla Walla, Wash., 216 ft. steel plate girder bridge and 240 ft. steel deck girder highway bridge over Juniper Canyon in Oregon; 12 ft. stringer deck girder railroad bridge and 32 ft. reinforced highway bridge over Spring Gulch in Washington on either side of Columbus River above McNary Dam, Clyde Ng., 1644 S. 12th St., Tacoma, Wash., and Thomas St., Richmond, Calif., $242,089. Est. $283,640. Bids 6/7. CD 3/8.

Alta., Calgary—City, City Hall, repairing Centre Street Bridge, to Poole Constr. Co., Ltd., 240 2A St., $50,000-$60,000. Awarded 6/6. 2 Year Strong City Hall, city engr.

STREETS AND ROADS

BIDS ASKED

Calif., Agnew—(B.A. 7/11)—State Div. Architecture, P. Wks. Bldg., Sacramento, equip. and walks at Agnew State Hospital, Agnew, Dept. Sacramento, state engr.

Miss., Meridian—(B. A. 7/12)—City, R. S. Tew, mgr., and treas., Meridian, grading, paving, curb and guttering various streets, etc. Plans deposit $10.

PROJECTS COVERED

Projects—By Size

Construction projects here reported cover the United States and Canada; are of these minimum sizes or larger: water supply, earthwork, waterways $24,000; other public works $100,000; industrial buildings $68,000; other buildings $250,000.

Classes of Construction

(Name in order of Listing)

Water Supply	Latin America
Sewers, Waste Disposal	Public Buildings
Bridges	Commercial Buildings
Streets & Roads	Industrial Buildings
Earthwork, Waterways	Unclassified

Stages Reported

PROPOSED WORK: Including appointment of engineers or architects.

BIDS ASKED: new announcements only. For full calendar, see a 10-preceding issues of ENR.

LOW BIDDERS: on jobs below $500,000 value all low bidder news will be the final reports published on the projects involved except where award is not made to the low bidder. In this case, a supplementary contract award report will be published.

CONTRACTS AWARDED: Except awards to low bidders previously reported in low bidder stage.

Dates shown are of issue in which last previous report was published.

Symbols and Abbreviations Include:

† Federal Government
▲ Private of $1,000,000 or over.
BA Bids Asked
ENR Engineering News-Record
CD Engineering News-Record Construction Daily

LOW BIDDERS

California—State Div. Hgy. Sacramento, June 14. Grade and pave on centerline near Surf, 4.7 mi. Grant Line Rd. between State Hy. Rt. 4 northwest of Tracy and Holly Sugar Spur, San Joaquin Co.; from P. J. Moore & Son, Box 504, Sacramento, $103,255. 6 conc. with plant mix surf., reinf. conc. bridge and drainage structures on mi. between Fernando Interchange and Mission and Keyes, Stanislaus Co.; from Bruce Brosamer, Los Angeles, $731,826. CD 5-22

Indiana—State Hy. Comm., Indianapolis, reported bids June 13, grading and shoulder, 4.476, 6.012 mi. State Rd. 13, Howard, Madison Co.; L. B. Foster, $121,648. CD 6-1

Indiana—State Hy. Comm., Indianapolis, June 13, rpr. 0.419 mi. Rd. 52 intersection Lafayette Rd. and W. 16 St. and White River Bridge approaches, from Wm. D. Vogel Constr. Co., 1760 Dr. Gray St., Indianapolis, $230,093, est. $243,339. 2 conc. & conc. & stl. br. 0.62 mi. west Rd. 421 at Ripley-Jefferson Co. line, from Berns Constr. Co., 412 E. Washington St., Indianapolis, $77,437, est. $81,916. CD 6-1

Massachusetts—Commonwealth of Mass., Dpt. P. Wks., 100 Nashua St., Boston, May 31, repvr. by Columbus Rd., Boston, from B. A. Simeone Inc., 72 Mystic Ave., Medford, $171,158, repvr. by Lowell, U. 214 (2) Constr. Co., from Eldredge Bros. Corp., 50 Central St., Boston, $162,313. CD 4-17

Mo., St. Louis—City, c/o Frank McGrath, Jnct. Ed. P. Serv. City Hall, June 13, grading, with concrete paving, parking strips and curbs, 0.7 mi. Hampton-Johnson Ave. from Bancroft to Hereford Aves., from Henry L. Peterson Constr. Co., 2424 Hodiamont St., Zone 13, $60,199. CD 6-17

O., Toledo—City, Arnold V. Feuch, mgr., Safety Bldg., June 13, resurf. streets in West Moreland, Ashland, Park and Indiana Hills and alleys in Moreland, A. J. Lampenfeter & Son, 6400 W. Bancroft St., $58,533, est. $59,464. CD 6-6

Pennsylvania—State Hy. and Bridge Auth., 504 K. Rm. Bldg., Harrisburg, June 16, constr. bridge and approaches, Pymatuning Reservoir, Crawford Co., 1.7 mi. 4-lane rdwy. on fill, 23 ft. wide on each side of center, bridge and constr. joint, 2 conc. bridge girder, drainage, * 207 ft. long, A. T. H. U.S. 22-30, between Rockaway Farms Bore and Conneaut Bore, Allegheny Co., from Cassetti Constr. Inc., McCartney St., Pittsburgh, $840,470. CD 5-25

CONTRACTS AWARDED

California—State Div. Hy., [illegible] cement treated subgrade, plant mix surf., [illegible] etc., reinf. conc. slab, timber pile, Dutch Slough Creek, reinf. conc. box culvert over Bethany Creek and Tongue Mustard Co. Rd. Br. No. 28-0, Br. No. 28-33, Contra Costa Co., from Ghilotti Bros., San Rafael, $758,513. Bids rec'd 24. CD 4-1, under LB

▲California—State Div. Hy., [illegible] mix surf. course, [illegible] to grade, 5.4 mi. between Delano and Pixley, Tulare Co., from Granite Constr. Co., Box 1, Bakersfield, $1,039,424. Bids rec'd 7. CD 6-15, under LB

Calif.—Los Angeles County, Co. Com., [illegible] curbs, sidewalks, pavement and drainage for [illegible] tract [illegible], to Leaders Co., Inc., Rosemary Rd., $3,000. Seaboard Eng. Co., 8444 Wilshire Blvd., Beverly Hills, engrs.

Ga., Griffin—City, street improvements, grading & conc. inc. 24 Gal. Corrug. M. Arvedis, $94,357. Bids rec'd 7. CD 6-9

Michigan—State Hy. Dpt., Lansing, [illegible] aggregate surf., 4.224 mi. M-40 south county line, [illegible] 3.41 mi. [illegible] Van Buren Co., from Ann Arbor Trail Co., Ann Arbor, $175,949. Awarded 6-8

Minn., Fairmont—Mun. Wtr. & Lt. Com., [illegible] gravel, 3 mi. [illegible] between Fairmont and Welcome, from Lunning Constr. Co., [illegible] Fairmont, $58,624. Bids rec'd 6. CD 6-1, under LB

Mo., Northwoods (St. Louis 21, P.O.)—City, 28 ft. wide, [illegible] asph. surf. on Marlin Dr., Lucerne Ave., Arnold Ave., Arnold Rd. to Lucerne Ave., Bird Ave., Bird Rd. to Lucerne Ave., Lucerne Rd. to Lucerne Ave., from Paschen Contractors, Inc., 1800 Hodiamont Ave., Zone 13, $102,940. CD 6-1

New York—Yonkers, N. A. Cerullo, Assoc. Engr., [illegible] between Nepperhan Ave. and Yonkers Ave., from Walsh Constr. Co., 2 Rector St., New York, $745,779. Bids rec'd 7. CD 6-1, under LB

Pa., Phila.—City, c/o Dir. of Public Property, [illegible] sewers for new heating to Lex. Bldg., 441 N. Broad St., from Ave., $301,568. A. Zaic Hoffman, Jr., [illegible] CD 3-10-49

EARTHWORK, WATERWAYS

BIDS ASKED

† California—B.A. 7-6—Bureau Reclamation, Dpt. Interior, Santa Barbara, Calif., constr. Cachuma Dam, Cachuma Project, on Santa Ynez River in Santa Barbara, approx. 19 air line miles northwest of Santa Barbara, [illegible] 30845, [illegible] Bldg., U.S. Denver Federal Center, Denver, Colo. Dr. Eng., CD 4-20-50

† New York—B. A. 7-26—U.S. Eng., 86 Lafayette St., New York, June 14, installing [illegible] machinery and electrical equip. and other [illegible] electrical location of Troy Lock No. 2, [illegible] CD 5-18

† South Dakota—B.A. About 8-16—U.S. Eng., 1706 Jackson St., Omaha, Neb., furnishing intake gate hoists for intake structure of Fort Randall Dam, Charles Mix Co., near Lake Andes, Spec. No. CIVENG 25-066-50-200

LOW BIDDERS

† California—Bureau Reclamation, Dpt. Interior, Redding, Calif., B. upper Vista House at Shasta Dam, Central Valley Proj., [illegible] 4147, from Hass & Rothschild, 274 Brannan St., San Francisco, $245,899, est. $305,024

▲† California—[illegible] Traverse St., Los Angeles, [illegible] 4.2 mi. to River Wye B.Bo Trunks, Walsh Eng. & Mfg. Co., 54 [illegible] 14 from Bressi & Bevanda Contractors, Inc., 6410 Tujunga Ave., Los Angeles, $1,664,115. CD 5-24

† Connecticut—U. S. Eng. Army Base, Boston, 10 Wash., cancelled bids to have been opened May 29, impvs. dredging in Newark Harbor, CIVENG 19-026-50-69, CD 5-25

† Illinois—U. S. Eng. Bldg., U. S. Court House & Custom House, 1114 Market St., St. Louis 1, Mo., levees, Prairie Du Rocher to [illegible] and [illegible] Lake and Prairie to Rocher and Wood Drainage and Levee Dists., Proj. Item 1, A. Randolph Co. from Lake Constr. Co., Cumberland, $171,273. Est. $196,873. CD 5-22

† Louisiana—U. S. Eng., Dist. of Pretoria St., New Orleans, 7 mi. S. jetty, approx. 12,000,000 cu. yd. [illegible] Jetty, Architectural Barge Protection over Area, Extend Jetty, St. Mary Parish, [illegible] 222, from Mississippi Dredging Co., Box 4943, New Orleans, $417,500. CD 5-31

† Wisconsin—U. S. Eng., 428 Federal Bldg., Milwaukee, rejected bids Apr. 13, [illegible] Harbor, Lower Fox River Locks, [illegible] 47,011, [illegible] Advertise, CD 3-20

† Wyoming—Bureau Reclamation, Dpt. Interior, Bldg. 1, A. Denver Federal Center, Denver, Colo., 20,000 bbl. portland cement in [illegible] paper sacks, for construction [illegible] Dam, Missouri River Basin Proj., Cheyenne Div., Kortes Unit, Wyo., from [illegible] Box 1, Casper, Wyo., $52,000

† B. Dubois—Dpt. E. Ave., Hoosick Bldg., Pittsburgh, [illegible] $39,342

CONTRACTS AWARDED

† Illinois and Missouri—[illegible] $626,

AIRPORTS

LOW BIDDERS

† N. J., Fort Dix—AAF, [illegible] Dpt. of the Army, Fort Dix, [illegible] Runway Addition, [illegible] $122,840. Parking Apron and Taxiways, [illegible] $134,374. [illegible] New York Ave., Trenton, [illegible] $162,000. [illegible] Trenton A. A. Airport, [illegible] W. State St., [illegible] $29,986. [illegible] Fort Dix, [illegible] $31,950. CD 5-18

† R. I., Warwick—AAF, [illegible] Dpt. of the Army, [illegible] Warwick Rd., [illegible] $17,691. CD 5-24

CONTRACTS AWARDED

† Pa., State College—[illegible] Airport, [illegible] $279,858.

AMERICANS ABROAD

Turkey—[illegible] Govt. Agency and U.S. Engineering Firm, [illegible] American Mission for Aid to Turkey, awarded contract repairing and resurfacing [illegible] Airports in Mediterranean Area, [illegible] Adana, Incirlik, Yumurtalik, Iskenderun, Mersin and Balikesir, [illegible] Bldg., Ankara, Turkey, [illegible] Bldg., Mo. and Kansas City, Mo., [illegible] Park Ave., New York, N. Y., U.S.A.

PUBLIC BUILDINGS

BIDS ASKED

Calif.—Patton—[illegible] B.A. 7-6—State Div. Architecture, P. Wks. Bldg., Sacramento, laundry bldg., state [illegible] Patton State Hospital, Arson Boys' Supplemento state asstr., CD 2-28-49

† Fla.—Cocoa—[illegible] Eng. Dept., P. O. Box 4370, [illegible] Forwarding & Buildings, [illegible] Base Hospital, [illegible] Air Force Base, [illegible] extended date ACED-6, [illegible] CD 4-20-50

Tex.—Lorraine—[illegible] B.A. 7-7—Lorraine Independent School Dist., Lorraine, [illegible] concrete and [illegible] cafeteria, [illegible] concrete slab foundations, [illegible] Approx. $250,000. Dun W. Smith, Texas Bank Bldg., Sweetwater, archt.

Tex.—Marlin—HIGH SCHOOL—B.A. 7-7—Marlin Independent School Dist., Marlin, Negro High School, Approx. $250,000. Plans deposit $50. Thomas, Jamie & Merrill, 820 N. Harwood St., Dallas, archts., CD 10-21

Tex.—Sweetwater—SCHOOL—B.A. 7-7—Sweetwater Independent School Dist., Sweetwater, Reagan-Lewis school remodeling, $375,000. Plans deposit $20, extended date W. A. Griffin, 207 Levy Bldg., archt., CD 4-1

Ont.—Chalk River—GARAGE—B.A. 7-7—Purchasing Agent, National Research Council, Sussex St., Ottawa, 1 story, 56x145 ft. garage exten., Bldg. 402 at Atomic Energy Project. Approx. $90,000. Plans deposit $25

Wash.—Concrete—SCHOOL—B.A. 7-10—School Dist. 102, Concrete, 1 story, 60x100 ft. frame concrete masonry school, $550,000. Plans deposit $25. Charles A. Clarence Rueger, 15 N. Broadway, Tacoma, archts., CD 4-10-47

Ont.—Whitby—HOME—B.A. 7-10—Wm. G. Manning, Hospital for the Aged, Whitby, part 1 and 2 story, [illegible] home for the aged, masonry, frame, irregular shape, home for the aged. Approx. $325,000. Plans deposit $40. Rountree & Fairfield, 22 Hatherly St., Toronto, archts., CD 12-7-29

Calif.—Soledad—PRISON—B.A. 7-11—State Div. Architecture, P. Wks. Bldg., Sacramento, maximum prison group farm, addn. at California State Prison, [illegible] shutter house, [illegible] and calf barn, bull barn, [illegible] addn. to [illegible] garage addn. Plans deposit $25. Arson Boys' Supplemento, state archt., CD 4-14-50

Calif.—Tracy—INSTITUTION GROUP—B.A. 7-11—State Div. Architecture, P. Wks. Bldg., Sacramento, (2) general, (2) electric, (3) plumbing, (4) heating, ventilating and refrigeration, (5) boilers and plant equip., main institution group at California Vocational Institution. Plans deposit (1) $200, (2) (3) (4) and (5) $50. Arson Boys' Supplemento, state archt.

Ky., Lexington—HOSPITAL—B.A. 7-11—Veterans Administration, Bldg. 2 and 25, Veterans Administration Hospital

N. Y., Brooklyn—HOUSE—B.A. 7-12—New York Housing Auth., 21 Park Pl., New York, Zone 7, heating, ventilating for Sect. 11, Ind. Bldg. Numbers [illegible] A, Individual of Farragut Houses, Prin. [illegible] Sect. 11, [illegible] Bldg. Nos. [illegible] Navy Yard, and Cult St. Houses, [illegible] at northeast [illegible] and [illegible] Sumner St. Plans deposit $25, Extended date

O., Cincinnati—ARMY—[illegible] B.A. 7-12—Ohio [illegible] Kenneth Krueger, post adjutant, general of Bldg. 101, Fort Thomas, Cincinnati, Zone 16, [illegible] Guard Armory, repairs, addn. Kelly

▲ Fla., Tampa—[illegible] B.A. 7-14—Hillsborough [illegible] Plans deposit $50. Wm. G. Brown, 420 Mac Dill Ave., Tampa, archt. Reynolds, Smith & Hills, 227 S. Pine St., Jacksonville, assocs., CD 4-7, under LB

Tenn.—Gallatin—HIGH SCHOOL—B.A. 7-14—Sumner County Board of Education, high school addition, [illegible] Plans deposit $100. Edward Hoffman & Jordan, Inc., Arcade Bldg., Nashville, archts.

Conn.—Hartford—SCHOOL—B.A. 7-19—Archie N. Bush, [illegible] Hartford, Conn., Municipal Bldg., [illegible] Washington St., known as the Mark Twain [illegible] Plans deposit $25, CD 3-15-49

† Mich.—Fort Custer—LAUNDRY—[illegible] B.A. 7-25—Veterans Administration, Main Bldg., Washington 25, D. C., Country-wide, [illegible] Fort Custer, Augusta, Mich., [illegible] ventilating, [illegible] for Veterans Admin. Hospital, Specification [illegible]

Del.—Camden—SCHOOL—B.A. 7-24—Camden County [illegible] $300,000. Plans deposit $25. Warren & Wenrich, 1020 Walnut St., Philadelphia 7, Pa., archts.

† N. Y.—Sagamore—[illegible] PLANT—B.S. in Albany, Mental Health Commissioner, Albany, [illegible] Mile Defective Delinquent [illegible] Kids to have been [illegible] CD 4-6

LOW BIDDERS

Ark.—Little Rock—OFFICE—State Game & Fish Comm., [illegible] H. Klinger Co., 1212 [illegible] $373,678

Calif.—Los Angeles—SCHOOL—City Bd. of Educ., 1425 S. San Pedro St., [illegible] Eng., [illegible] West Valley Jr. High, [illegible] Mrad & Bonelli, 3580 Wilshire Ave., $288,000. Est. $280,000. CD 4-7

La.—Port Sulphur—[illegible] Plaquemines Parish School Bd., [illegible] Eng., [illegible] Vocational School, [illegible] $69,995

† Me.—Brunswick—[illegible] Eng., U. S. Custom House, [illegible] Bennett Co., 108 [illegible] $167,434

Wash.—Bickford—[illegible] Comm., [illegible] Veterans Administration, [illegible] $223,300. Bids rec'd 11. Proposal A, $264,200. Proposal B, $322,000. CD 4-6

Wash.—Pasco—[illegible] Bldg., [illegible] Washington St., Richland, [illegible] $322,000. CD 4-6

Mo.—Webster Groves (St. Louis P.O.)—SCHOOL—Webster Groves School Dist., Rd. East, to Selma Ave., [illegible] 1 story, [illegible] Rd. to Selma Ave., [illegible] 1241 S. Edgar Rd., near Amherst

Court from Kinstler Co., 4607 Peck Ave., St. Louis, Zone 16, $273,900. CD 5-23.

N. C. Chapel Hill—SCHOOL OF COMMERCE, Univ. of North Carolina, W. D. Carmichael, Jr., controller, Chapel Hill, June 13, 1,500,000 cu. ft. School of Commerce Bldgs. A, B and C, from J. A. Jones Constr. Co., 209 W. 4 St., Charlotte, $463,600. CD 6-1.

Pa. Retreat—BOILER PLANT, General State Auth., 18 and Herr Sts., Harrisburg, June 13, James A. Fitzpatrick, contract boiler plant addn. at retreat State Hospital, from Raymon R. Hedden, Nanticoke, $179,900. Heating, from Willard Sutes & Service, Inc., 1401 N. Broad St., Phila., $223,760. CD 5-25.

R. I. Exeter—ADMINISTRATION, etc., State of Rhode Island and Providence Plantations, State House, June 7, Administration Bldg., 823 at State School and Service Bldg., 822, alterations, from Mallory & Rohlen Co., 66 Wickenden St., Providence, $281,212.

† Wyoming—GAS STATION, Bureau of Reclamation, Dept. Interior, Cody, June 8, Thermopolis gas station, Frank Mission Div., Missouri River Basin Proj., Spec. 3010, from Gregory M. Smith, Thermopolis, $160,412. Est. $170,272. CD 5-16.

CONTRACTS AWARDED

Ga. Augusta—LAUNDRY, City Hospital Auth., Lyle, Cooper & Ewing, 5 F. C. Bldg., archts., laundry at University Hospital, to Clarence Mobley Constr. Co., Augusta, $74,549. CD 4-12.

Ia. Ogden—POWER PLANT, City, power plant addn., to Cooper-Beetterman Co., Mt. Vernon, $75,591. Bids 5-16. CD 4-19.

La. Lafayette—CHEMISTRY, State Bd. Educ., Capitol Area, Baton Rouge, report on building at Southwestern Louisiana Institute to Kaplan Constr. Co., P. O. Box 1, I Station, $595,565. Bids 6-16. CD 4-12, under LB.

Mass. Lowell—ENGINEERING UNIT, Commonwealth of Mass., Dept. Educ., 200 Newbury St., Boston, paper and leather engineering unit bldg., to Louis Marino & Son, 12 Martin St., $549,937. Bids 5-25. CD 4-12, under LB.

Mass. Westfield—GARAGE, etc., City, Gas & Electric Dept., 14 Main St., 2 and 3 story municipal garage and office structure and warehouse, Lockwood, Greene & Phelps Constrs., 65 Pine St., Boston, $68,550. Bids 5-22. CD 5-10.

N. Y. Valley Stream—STORE CENTER, Morris Sunshine & Herbert Sackin, Franklin Ave. Franklin Square, store center, Merrick Rd. to west Shaw St., and Dale Pl., seven bldgs., $250,000. Stanley Klein, 99-15 116 St., S. Richmond Hill, archt.

† Utah, Tooele—CONVERTING BLDGS., Tooele Ordnance Depot of U. S. Army, Tooele, converting bldgs. to provide 62 family type units at Tooele Ordnance Depot, to R. J. Daum Constr. Co., Inglewood, Calif., $279,414. Bids 5-16. CD 4-19.

Que. Mount Bruno—COTTAGE, Catholic Boys Welfare Society, 245 Cote St. Antoine, Montreal, cottage to be administered to 45 inmates with reception and detention quarters, tunnel, four self-contained cottages, school, gymnasium, heating plant and cold rooms, dwelling to Angus Robertson Ltd., 5050 Western Ave., Montreal. Approx. $500,000. CD 4-18.

▲ Que. Roberval—CHURCH, Province of Quebec, Quebec, convent, presbytery, parochial house, poultry and cow house plant, to E. Verreault & Sons, 1250 Third Ave., Quinze City, $1,000,000. P. Rivard, 600 Blvd. Churest, Quebec City, archt. CD 10-18.

COMMERCIAL BUILDINGS

BIDS ASKED

Ind. Anderson—OFFICE, B.A. Amick, 2121 Indiana Ave., Indianapolis, Ind., owner, 16x75 W. 29 St., also store, 40x200 ft., brick, limestone trim. Approx. $300,000.

N. C. Durham—RESEARCH, Bids Asked, Duke University, Medical Center, Durham, 4 story, 60x210 ft. wing addn. for Duke University Medical Research Bldg., DP, cancer research, $300,000.

SOON LETS CONTRACT

Mass. Boston—HOSPITAL, etc., Morton S. Nickerson, 251 Columbus Ave., soon lets contract 3 story Thaddeus M. Carter Virology Laboratory, 2 story, 60x60 ft., for patients bldg., addn., alterations, Jacobs, Brickley & Nickerson, Boston, to Aberdeen Constr. Co., 18 Tyler St., Boston, archts., CD 11-24-47.

N. J. Lawrenceville—SCIENCE, The Lawrenceville School, Lawrenceville, soon lets contract 3 story Physics Bldg., Addn., $250,000. Delano & Aldrich, 126 E. 38 St., New York, N. Y., archts., CD 11-24-47.

Pa. Phila.—NURSES HOME, etc., Roth & Fleisher, archts., 1420 Walnut St., soon lets contract nurses home and hospital alterations, addns., for Women's Medical College Hospital, Henry Ave. and Abbottsford Rd., $500,000. Separate 3 story, 45x100 ft. nurses home, Lexington Ave., New York, N. Y., estd. CD 1-26-49.

Tex. Austin—HIGH SCHOOL, ARTERS, Texas State Teachers Assn., C. H. Jamison exec., Littlefield Bldg., soon lets contract headquarters, Approx. $250,000. Page, Southerland & Page, 402 West Ave., archts., CD 2-8-50.

LOW BIDDERS

N. H. Newport—HOSPITAL, Florence Wright Hospital, Newport, June 2, hospital, from T. W. Cunningham, 58 Columbia St., Bangor, Me., $267,700. CD 5-24.

N. J. Haddonfield—DORMITORY, etc., Bancroft School, Haddonfield, dormitory and dining hall, from John P.

STEFCO's the buy in steel buildings

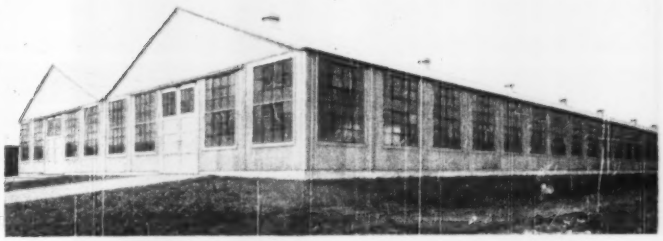



sTEFCo

For scores of industrial, commercial and general service requirements, *Stefco's the buy!*

- Up faster with less labor!
- Require no field assembly of sash or doors!
- Flexible — to fit the job!
- Permanent — yet portable!
- Economical — from first to last — in cost, in erection, in maintenance!

If you're planning new buildings—regardless of style or type of construction—find out now how Stefco can meet your needs. Full details without obligation.

Write, wire or phone

STEFCO STEEL CO.

MICHIGAN CITY, IND., PHONE 115

SALES OFFICES

Chicago 1, Ill. — 332 S. Michigan Ave.
St. Louis, Mo. — 720 N. 4th St.
New York, N. Y. — 50 Church St.

For names and addresses of other representatives Consult our Home Office.

"GUNITE" CONCRETE

(Since 1915)

FOR • STEEL PLATE LINING • STEEL ENCASEMENT • BUILDING NEW WALLS • LINING, WATER RESERVOIRS, TUNNELS AND SEWERS • PLATE LINING OF STEEL STACKS, BUNKERS, DUCTS • REPAIR OF DISINTEGRATED CONCRETE AND MASONRY • CANAL, DITCH AND DRAIN LINING

GUNITE CONCRETE & CONST. CO.
1301 Woodswether Rd., Kansas City 6, Mo.

District Branch Offices

R. N. Turner, Dist. Mgr., 228 No. LaSalle St., Chicago 1, Ill.; B. H. Mueller, Dist. Mgr., 6625 Delmar Blvd., University City, (St. Louis), Mo.; Philip D. Barnard, Dist. Mgr. 2036 Addison, Houston 5, Tex.

Branch Offices: Denver, Dallas, New Orleans

See our catalog in Sweet's

DRILLING CONTRACTORS

DIAMOND AND SHOT CORE BORINGS—DRY SAMPLE BORINGS

Foundation Testing for Bridges, Dams and All Heavy Structures

Also

Manufacturers of Diamond and Shot Core Drills, Accessories and Equipment

SPRAGUE & HENWOOD, Inc.
Scranton, Pa. **Dept. E, U. S. A.**

Donovan, Inc., 225 S. 15 St., Phila. $268,700. Bids 6/2. CD 5/26.

Tenn., Chattanooga—APARTMENT—Montview Apartments, Inc., c/o Harrison, Orr & Associates, archts., Chattanooga Bank Bldg., rejected bids May 26; apartment development. L. B. $408,778. CD 6/2 under LB.

CONTRACTS AWARDED

Calif., San Lorenzo (near Hayward)—RESIDENCES—Greenwood Corp., 854 San Mateo Dr., San Mateo, 4v residences, v.a. Granada, Paseo Grande v.a. Toledo and via Verrada to E. B. Hermanson, 819 San Mateo Dr., San Mateo. $355,000.

Calif., San Jose—RESIDENCES—Tyson Constr. Co., Box 728, San Jose, 40 residences on Paseo Pueblo, Paseo Cristales, Paseo Presidio, Owner builds. $320,000.

Conn., Stepney—HOUSES—Hillside Ave., Inc., Wm. H. Foster, pres., to Bridgport, frame ranch type houses, Route 25 and Hillcrest Rd. Owner builds. $250,000.

Del., Wilmington—RESIDENTIAL DEVELOPMENT—Charles E. Smith, 2869 van Buren St., residential development, section 1, separate contracts. $250,000.

Fla., Tampa—APARTMENT—Azalea Court, Inc., c/o Paul Smith Jr., Paul Smith Constr. Co., 319 N. Pome Ave., apartment. Owner builds. $250,000.

Ill., Belleville—ORPHANAGE—St. John's Orphanage—Jas. P. McCormick, supt., Lebanon Rd. and Most Rev. Albert R. Zurbuchen, Catholic Bishop of Belleville, 222 S. Third St., general contract rehabilitation and constr. orphanage bldgs., incl. 1 story, 41x166 ft. and 28x30 ft. infants cottage; 1 story, 52x149 ft. and 23x21 ft. sisters residence; 1 story, 52x158 ft. girls dormitory and 1 story power, 30x134 ft. and 42x58 ft. recreation hall. Brst Constr. Co., Supply, 424 Lebanon Ave. $553,553. Bids 6/6, awarded 6/12. CD 6/7.

▲ Ill., Chicago—ACADEMY—Sisters of St. Casimer, 2701-51 Marquette Blvd., Zone 29, 4 story, domit., 266x552 ft. academy, to Geo. Sollitt Constr. Co., 109 N. Dearborn St., Zone 2, and structural steel to Hansell-Elcock Co., 485 W. Erie St., Zone 10. $2,500,000. CD 6/1.

Ind., Logansport—HOMES—F. A. Detwiler Constr. Co., 340 Woodlawn Ave., 40 homes in Southern Acres, own forces. $350,000.

▲ Md., Chillum (br. Hyattsville)—SHOPPING CENTER—Standard Constr. Co., Inc., Hyattsville Bldg., 1013 Vermont Ave., Wash., D. C., to store, shopping center, restaurant, theater, 200-car parking area, New Hampshire Ave. and Riggs Rd., Hyattsville Bldg., Approx. $3,000,000. Storing & Mann, 1726 Main St., N.W., Wash., archts.

Md., Kenilworth—APARTMENTS—Addison Oliver, c/o Tower Bldg., Wash., D. C., 2-27 two story, 16x76 ft. brick frame 32-unit apartment development, addition (Phase II), near 52 St. to Burns & Lee, Inc., Tower Bldg., Wash., D. C. Aaaaron, 618 E. Rhode Island Ave., Mt. Rainier, archts.

Mo., St. Louis—APARTMENT—Roy C. Crafton, 6187 Westminster Pl., Zone 13, 7 story, 56x94 ft. reinforced concrete brick family apartment, 4522 Delmar Blvd., to Roy M. Donaldson, Inc., 4502 Manchester Rd., Brentwood, St. Louis, Zone 17, approx. $300,000. CD 4/12, under CA.

N. J., Beach Haven—RESIDENTIAL DEVELOPMENT—Long Beach Land Co., Beach Haven residential development, separate contracts. $250,000.

N. J., Camden—RESIDENTIAL DEVELOPMENT—Thomas Pestworth, 1213 S. 10 St., residential development, Howe St., etc., separate contracts. $250,000.

N. J., Camden—RESIDENTIAL DEVELOPMENT—P. Tosi, 144 Line St., residential development, Bergen Crossing Highland Ave., etc., separate contracts. $250,000.

N. J., Gloucester—RESIDENTIAL DEVELOPMENT—Owner c/o Charles H. Donehower, Inc., 244 W. Evesham Ave., Merchantville, residential development, separate contracts. $600,000.

N. J., Lumberton—RESIDENTIAL DEVELOPMENT—John Matarazzo, Lumberton, residential development, Madison Ave., separate contracts. $445,000. Henry W. Pette, 141 Chestnut St., Moorestown, archt.

N. J., Magnolia—RESIDENTIAL DEVELOPMENT—John W. Croft, Magnolia, residential development, separate contracts. $250,000. Dante J. D'Anastasio, 2315 Federal St., Camden, archt.

N. J., Runnemede—RESIDENTIAL DEVELOPMENT—B. Henry Co., Runnemede, residential development, Evesham Rd., separate contracts. $850,000. Henry W. Pette, Moorestown, archt.

N. M., Albuquerque—SCIENCE, etc.—College of St. Joseph, Albuquerque, science and classroom bldg., to Jemtex Constr. Co., Box 114. $448,370. Awarded 6/12.

N. Y., Hoxard Beach—HOUSES—Sherman Homes, c/o Alwin Cassen, Jr., archt., 114-55 Queens Blvd., Forest Hills, sixty-eight 1 family houses in area bounded by 95 and 158 Ave., 84 St. and 149 Ave., owner builds. $550,000.

▲ N. Y., Kew Gardens—APARTMENT—Queens College Gardens, c/o Purdy & Miles, 16 Court St., Brooklyn, Zone 2, 402 family garden apartment on 11 acre site bounded by Jewel Ave., 138 and 150 Sts., Owner builds. $4,000,000. A. H. Skidmore, 32nd #2 St., Jackson Heights, archt.

N. C., Charlotte—CHURCH—First Presbyterian Church, Dr. Charles F. S. Kraeuter (pastor), 200 W. Trade St., church addn., alterations, to A. Jones Constr. Co., 209 W. 3 St. $249,000. Bids 6/6. CD 6/8.

O., Columbus—HOUSES—Vic Evans Builders, Inc., 3145 S. High St., twenty-seven 1 story frame dwellings, Wevart Ave. and Napoleon Ave., Owner builds. Approx. $250,000.

Pa., Erdenheim (Phila. P. O.)—RESIDENCES—Chesney Downs, Inc., 838 E. Haines St., Phila., residential development, Longford and Avondale Rds., separate contracts. $250,000.

Pa., Harrisburg—SHOPPING CENTER—J. W. Kiker, 219 Walnut St., 128,000 sq. ft. shopping center, east of John Harris High School on 25 St. to Lay to Derry, 24 S. 3 St. $400,000. CD 11/24.

Pa., Norristown—RESIDENCES—Fred N. Wheeler, 834 W. Walnut Lane, Phila., residential development, Sec. 11, separate contracts. $250,000.

Pa., North Hills—RESIDENCES—Charles A. Smith, North Hills, resident. dev., extension, various sections, separate contracts. $250,000.

Pa., Oreland—RESIDENCES—George W. Carson, Camp Hill, Mrs. Whitemarsh, residential development, Church Rd., etc., separate contracts. $250,000.

Pa., Oreland—RESIDENCES—Conrad A. Gettier, North Wales, residential development, Church Rd., etc., separate contracts. $448,000.

Pa., Phila.—RESIDENCES—Christian Fr. Brattskaar, 5456 Castor Ave., residential development, Lansing St., separate contracts. $250,000. c/o Harold Wortley, 1621 Seltzer St., archt.

Pa., Phila.—RESIDENCES—Moore Builders, Lost Trail bldg., residential development, Newkirk St., separate contracts. $250,000. c/o Irvin Friedman, 1325 Fairmount St., archt.

Pa., Phila.—RESIDENCES—Northwood Exclusive Homes, Inc., 2404 Allegheny Ave., residential development, Nedro Ave., Front and Champlost Sts., separate contracts. $250,000.

Pa., Phila.—APARTMENT—Owner c/o David P. Sisti, 2311 Walnut St., apartment, separate contracts. $250,000.

Pa., Phila.—SCHOOL, etc.—St. Thomas of Chit Jesus Catholic Church, 6934 Vernon Rd., school chapel and auditorium to H. F. Driscoll Co., 216 W. Chelten Ave., Approx. $500,000. CD 6/24.

Pa., West Conshohocken—RESIDENCES—Milton P. Nolte, 134 Hampshire Ave., residential development, Elm Ave., separate contracts. $250,000.

Pa., Upper Gwynedd—RESIDENCES—Wilson Builders, Inc., Gwynedd Ave., residential development, Zion Rd., separate contracts. Approx. $250,000.

Pa., Wyalmour—RESIDENCES—McCloskey & Co., 1520 Pa. Ave., residential development, Phila. Suburban area, separate contracts. Approx. $250,000.

Tenn., Memphis—APARTMENT—Orpheus Apartments, Inc., Porter, 102 apartment units to Wallace E. Lyles, Inc., 876 Raynor St. Approx. $400,000.

Tenn., Memphis—APARTMENT—Tunica Apartments, c/o Porter, 44 apartment units to Wallace E. Lyles, Inc., 876 Raynor St. Approx. $250,000.

▲ Utah—Salt Lake City—APARTMENT—Herbert H. Fowler, 1 Penthouse Circle, and Robert South Tempest, c/o N. O. Forsner, c/o Wasatch Electric, 20 E. 2nd South State St. 8 story, 40 unit apartment, 1 E. 1st and 1st South Sts., no. 60 car underground garage to Pierce Constr., 1 E. 1st South St. Approx. $1,000,000.

▲ Wash., Moses Lake—HOUSES—Nate Mortensen & Associates, 1021 Seventh Ave. N., Seattle, to construct, manage and finance 400 houses for military personnel at Air Force Base, 9 units to say 36br., $3,600,000. CD 11/29/49.

▲ Ont., Toronto—OFFICE—Manufacturers Life Insurance Co., 200 Bloor St. W., 12 story, 200x147 ft. office addn. to Angus Norcross, Ontario Ltd., 2 Bloor St. E., 11 Shaw St. Approx. $3,000,000. Bids 6/5. CD 5/19.

INDUSTRIAL BUILDINGS

BIDS ASKED

Ill., Chicago—PLANT ALTERATIONS, etc.—E. B. Badger & Sons Co., 3401 W. 47 St., Zone 9, plant and office alterations. $125,000. A. Epstein & Sons, Inc., 1011 W. Pershing St., Zone 9, archts.

Ill., Chicago—FACTORY—Bids Asked—Kix Machine Co., 6725 N. Ridge St., Zone 26, 1 story, 136x241 ft. steel, brick, concrete factory. $160,000. Friedman, Alschuler & Sincere, 203 W. Jackson St., Zone 6, archts.

Ill., Skokie—FACTORY—Bids Asked—Owner c/o Richard M. Bonnes & Associates, 414 N. Michigan St., Zone 11, 2 story, 200x200 ft. factory. $300,000.

Mass., Boston—TRUCK TERMINAL—Bids Asked—Diamond Transportation Co., Inc., c/o Leo F. Sheffield, archt., to Reason Co., 1 Story, 1x120x440 ft. brick, cinder block, truck terminal with loading platform, 12 overhead doors and office. Advance $45,000. CD 5/25.

SOON LETS CONTRACT

Kv., Harlan—PLANT—Chappell Body Co., c/o D. E. Perkins, archt., to operate Ford, Mercury soon lets contract for new plant. CD 6/12.

Pa., Phila.—DISTRIBUTION, etc.—Cowell, Robinson & Martin, engrs., and archts., 25 A st. St., New York, N. Y., soon lets contract distribution bldg., offices, garage for General Baking Co., 135 Lexington Ave., New York, N. Y. Approx. $68,000. CD 6/19.

Pa., Phila.—PLANT—Addressograph-Multigraph Corp., 217 E. 23 St., soon lets contract mfg. plant, 1500 Cherry St., Front Mfg. Co., 7701 E. Winthrop Ave., Approx. $75,000.

Que., Sherbrooke—PLANT—J. H. Bryan Ltd., 65 Depot St., lets contract 1 and 2 story, 100x250 ft. concrete structural steel brick metal clad, Dominion Rd. Approx. $150,000. A. Bourque, 16 Kenny St., archt.

LOW BIDDERS

Ga., Atlanta—WAREHOUSE, etc.—Druggists Cooperative, Inc., Cream Co., c/o Henry Jordan, 264 Healy Bldg., June 13, warehouse and office, from Capitol Constr. Co., 167 Harris St., N.W., $247,942. CD 6/14.

Ga., Atlanta—WAREHOUSE, etc.—Southeastern Industrial Dist., Hurt Bldg., June 13, warehouse and office, from Dye Constr. Co., Plum St., N.W. CD 6/12.

CONTRACTS AWARDED

Mo., St. Louis—FACTORY—Lesperance Realty Co., 1019 Soulard St., Zone 4, 2 story, 93x100 ft., brick, concrete factory, 4641-49 Shenandoah Ave., to Geo. L. Lohmeyer Constr. Co., 575 N. Skinker Blvd., Zone 5, Steffen Widmann & Co., 3453 Nebraska Ave., Zone 18, archts.

Neb., Omaha—GARAGE—Union Stock Yards Co., 920 Exchange Bldg., public parking garage, to Peter Kiewit Sons Co., Omaha Natl. Bank Bldg., $252,756. Bids 6/12. CD 5/26.

N. J., Atlantic City—FACTORY—Morris Miller, c/o contractor, 1 story masonry clothing factory, to H. R. Hankes, 413 N. Delsea Ave., $68,000. R. B. Williams, 4003 Ventnor Ave., Margate, archts.

N. J., Cumdon—MANUFACTURING, etc.—Clarick Chemicals Co., 61 Palmyra Ave., Jersey City, 2 story, 42x160 ft. cinder block and structural steel manufacturing and warehouse to Nea Constr. Co., Oakland, Calif., $250,000. CD 6/7/49.

O., Toledo—REPAIR SHOP—Toledo Terminal R. R., 1214 Delaware St., 45x120 ft. diesel repair shop with crane bay at Bay Yards to H. J. Spieker Co., 1428 Elm St., Approx. $40,000. Sanborn, Stoetter & Assoc., 1214 Cherry St., and Frederick A. Edington, 1812 Haverhill Dr., engrs.

Pa., Bloomsburg—POWER PLANT—Mayer Carpet Co., Bloomsburg, 1 story, 50x63 ft. masonry power plant extension to H. H. Evert Co., Inc., Bloomsburg. Approx. $65,000. Bids 6/10. CD 5/4.

Pa., Phila.—GARAGE—Fred Whitaker Co., Scotts Lane and Ridge Ave., 1 story, 114x434 ft., brick, truck maintenance garage, contracts. $100,000. The Barger Co., 121 N. Broad St., archts. Bids 6/2. CD 5/26.

Va., Vinton—WEAVING MILL—Burlington Mills Corp., Vinton, weaving mill addn. to English Constr. Co., Altavista. $350,000. CD 5/24.

Tenn., Collegedale—PLANT—Southern Missionary College, Collegedale, broom mfg. plant. Owner builds. Approx. $75,000.

Ont., Niagara Falls—PLANT—Canadian Celluloid Products Co., Ltd., 431 Victoria Ave., 4 story, domit., 40x244 ft. concrete brick plant addn. to Smith Bridge Constr. Co. Ltd., 1740 Eden St., Approx. $500,000. CD 6/2.

Ont., Toronto—FACTORY—Metalix Ltd., 7 Curlew Ave., 1 story, 123x173 ft. concrete brick factory addn., steel and wood chairs, own forces. $70,000.

Ont., Toronto—WAREHOUSE, etc.—Monsanto Canada Ltd., 1183 Front St. E., 2 story, 66x150 ft. steel, concrete block, brick warehouse and office to A. E. Rule Ltd., 491 Victoria Park Ave. Approx. $125,000. N. A. Armstrong, 19 Melinda St., archt.

UNCLASSIFIED

BIDS ASKED

◊ Arizona, California and Nevada—TELEMETERING EQUIPMENT, B.A. 7/6—Bureau Reclamation, Dpt. Interior, Bldg. 1-A, Denver Federal Center, Denver, Colo., current-current telemetering equip. for Hoover, Davis Dam and Parker Power Plants and Phoenix substation, Davis Dam Proj., Spec. 3044. L. V. McClellan, ch. engr.

◊ Colorado—UTILITIES—B.A. 7/6—Bureau Reclamation, Dpt. Interior, Loveland, furnishing, erecting complete with utilities, concrete silos and Rogers Instrument Field Office and Testing Laboratories, Loveland Colorado Big Thompson Proj., Spec. R-7,131 (Region 7), L. N. McClellan, Bldg. 1-A, Denver Federal Center, Denver, Colo., ch. engr.

La., Alexandria—STADIUM—B.A. 7/6—Rapides Parish School Bd., Alexandria, 6,000 seat athletic stadium.

Pa., Warren—ELECTRICAL SYSTEM—B.A. 7/6—General Stand Auth., 18 and Herr Sts., Harrisburg, converting electrical sys. from direct current to alternating current at Warren State Hospital, $400,000. Plans onhand $10. Harry D. Joyce &26 Commerce Bldg., Erie, engr. CD 9/30/49.

Virginia—RURAL DISTRIBUTION LINES—B.A. 7/6—Virginia Electric Cooperative, Bowling Green, 115 mi. rural distr. lines, Caroline, Hanover, Spotsylvania, Orange, Essex, King and Queen and King William counties, Plans depos. $10. CD W. Hylton, Bowling Green, engr. CD 8/19/49.

◊ Washington—STRUCTURAL STEEL—B.A. 7/6—Bureau Reclamation, Dpt. Interior, Bldg. 1-A, Denver Federal Center, Denver, Colo., misc. structural steel, grating for bus supports for units R7 #3 and #3, Grand Coulee Power Plant, Columbia Basin Proj., Spec. 3090. L. N. McClellan, ch. engr.

N. Y., Jones Beach—PARKING FIELD, etc.—B.A. 7/7—Long Island State Park Comm., Babylon, water supply extension, Overpeck Parking Field 1; boardwalk connection, Overpeck Parking Field No. 1 at Jones Beach State Park, near Wantagh. CD 12/30/46.

Calif., Agnew—STREET LIGHTING—B.A. 7/11—State Div. Architecture, P. Wm. Bldg., Sacramento, street lighting at Agnew State Hospital, Alson Road, Alviso, state farm.

(Continued on page 66)

MOBILITY MEANS BUSINESS

When there is real work to be done, profit-minded equipment users are turning to this money making package unit, consisting of a MARTIN Model 222 Trailer and T4 "Traxcavator."

Designed especially for this package combination, the MARTIN Model 222 Trailer adds mobility to the equipment on or off the highways, cutting down the time in moving from job to job, allowing the handling of a series of jobs and eliminating many hours of lost working time. It converts moving time into profit time and makes it possible to do that small job between those big jobs. The operator merely drives on and pulls away, drives off and goes to work.

Quickly and safely loaded or unloaded in a moment's time, the complete unit is easily towed by the average dump truck. The entire operation is a one-man job.

The photos below illustrate the simple manner of loading the T4 "Traxcavator" onto the MARTIN Model 222 Trailer. This rugged combination is being sold as a profit-making package by "Caterpillar" dealers everywhere.

Loading a T4 "Traxcavator" on a MARTIN Model 222 Trailer.

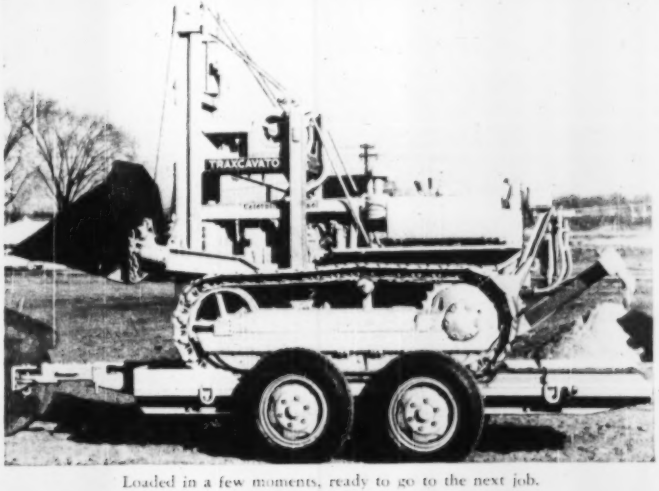

Loaded in a few moments, ready to go to the next job.

Write for complete information and specifications on the new Martin FOLDING GOOSENECK TRAILER.

MARTIN
CARRYHAUL
TRAILERS
MARTIN MACHINE COMPANY
KEWANEE, ILLINOIS — YOUR CATERPILLAR DEALER IS YOUR MARTIN DEALER

MARTIN
PRESENTS THE NEW
FOLDING
GOOSENECK TRAILER

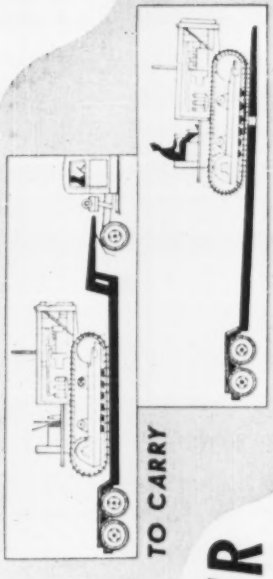

TO CARRY
. . . TO LOAD OR UNLOAD

ALBERT
"RINGS THE BELL"

SPEED-LAY PIPE SYSTEM
The complete packaged PIPE SYSTEM for fast-laying, temporary and semi-permanent lines for water, compressed air and other services.
WRITE FOR FREE BOOKLET

PILING—Sheet Piling—Lightweight • Tubular—All sizes

PIPE PILES—Lapweld • Seamless • Electric Weld • Spiral Weld

PILE SHELLS—Spiral Welded • Hel-Cor Riveted

CAISSONS

PILE FITTINGS—All types and sizes for steel and wood • Cobi Pile Tips • Cast Steel and Iron Points • Plates and Shoes • Cast Steel and Malleable Iron Sleeves

CULVERTS—Corrugated • Spiral or Riveted Steel

IMMEDIATE DELIVERY

VALVES AND FITTINGS
Tube Turns—Dresser—Victaulic
Cast Iron or Steel
Forged Steel
Special Alloys
Water Main

PIPE
Wrought Iron
Steel
Structural
Cast Iron
Copper-Steel
Seamless
Electric Weld
Spiral, Lap & Butt Weld
Shore Dredge
Speed-Lay

SPECIALISTS IN PRE-FABRICATED PIPING
Complete facilities for Bending, Coiling, Beveling, Swedging, Flanging, Grooving, Welding, Cutting to Sketch, and Threading to meet your most rigid requirements. Bitumastic or Cement Lining—Testing—All meeting Standard Specifications.

ALBERT
PIPE SUPPLY CO., INC.
Berry at North 13th Sts., Brooklyn 11, N. Y.
Phone EVergreen 7-8100

PUMPING PROBLEMS? HERE'S THE ANSWER!

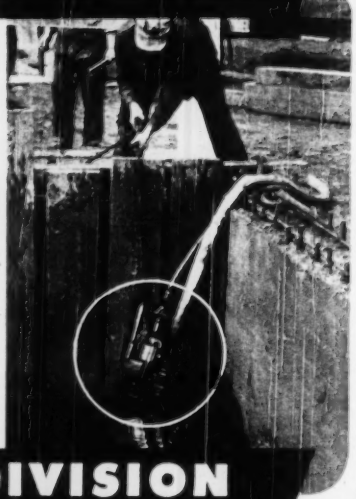

CLECO

No. 183-A AIR-OPERATED

PORTABLE SUMP PUMP

Capacity, 340 gpm at 10 ft. head, 124 gpm at 70 ft. head • Weight only 56 lbs. • Requires no priming • Available in steel or bronze construction • First choice of production-minded contractors

Write for Bulletin SP-849

CLECO DIVISION
of the REED ROLLER BIT COMPANY
P. O. BOX 2119 HOUSTON 1, TEXAS

(Continued from page 64)

Colorado—RURAL DISTRIBUTION LINES—B.A. 7-11: K. C. Electric Assn., Hugo, 108.57 mi. rural distribution lines in Lincoln, Kit Carson and Cheyenne Counties. Approx. $300,000. C. B. Eng. Co., 29 S. Grove St., Denver, engr.

† Ky., Fort Thomas—SPRINKLER SYSTEM—B.A. 7-19: Veterans Admin., Munitions Bldg., Wash., 25, D.C.: sprinkler sys. for Bldg. 27, Veterans Admin. Hosp. (1 Spec. 50112, Proj. 16-5063.

† Arizona—ELECTRICAL SWITCHES—B.A. 7-20: Bureau Reclamation, Dpt. Interior, Bldg. 1, A Denver Federal Center, Denver, Colo.: disconnecting switches for Prescott sub-station, Davis Dam Proj., Spec. 3097. L. N. McClellan, ch. engr.

Texas—OIL PIPE LINE—Bids Asked—Humble Pipe Line Co., Humble Bldg., Houston, 30 mi., 8 in. crude oil pipe line from near Ballinger to area of Fort Chadbourne Post. $210,000. CD 8-24-49.

SOON TO CONTRACT

Fla., Miami—SWIMMING POOL—Golden Strand Hotel Co., c/o Edgar B. Polevitzky, archt., soon lets contract, 250 E. 18 St., swimming pool.

LOW BIDDERS

Miss., Shubuta—NATURAL GAS SYSTEM—Chicasstwayy Natural Gas Dist., Shubuta, June 3, natural gas system from Cook Constr. Co., Standard Life Bldg., Jackson, $600,646.

CONTRACTS AWARDED

▲ Calif., San Francisco—WHARF—Bd. State Harbor Comrs., Ferry Bldg., wharf connecting Piers 30 and 32 to Ben C. Gerwick, Inc., 112 Market St., $1,050,000. Bids 5/31. CD 6/6, under LB.

Mass., Boston—TAFT-HARTLEY—Metropolitan Transit Auth., 21 Arlington Ave., Charlestown Sq. Square Station, East Boston, to J. A. Sisgarella Co., 25 Bay St., Dorchester, $904,000. Bids 5/18. CD 6/5, under LB.

Tenn., Chattanooga—TUNNEL—Miller Bros. Co., 218 Cumberland Bldg., under Broad St. to I. A. Wardlaw Co., Inc., 747 E. 11 St., Approx. $250,000. Bids 6/7. CD 6/2.

Tex., Gainesville—SWIMMING POOL—PARK—City, reinforced concrete swimming pool, $56,000, park. Approx. $50,000. Purchase and Hire Wyatt C. Hedrick, Fort Worth Natl. Bank, Fort Worth, engr.

▲ N. S., Sydney—PARK—(Mines), Dept. of Canada, Hunter Bldg., Ottawa, Ont., receives sections of Cabot Trail in Cape Breton Highlands National Park incl. bridge construction, to Fred Smith, Cape Breton, Ltd., 7 Russell St., Halifax, $1,086,570. CD 4/20.

PROPOSED PROJECTS

WATER SUPPLY

Idaho, Blackfoot—City, City Hall, water sys. improv., $125,000. E. B. Steele, 124 N. E. Main St., consult. engrs.

▲ La., Hahnville—St. Charles Parish Waterworks Dist. 2, Court House, Hahnville, voted bonds June 6; W.W. improv., $1,265,000. CD 7/27.

Neb., Lincoln—City, City Hall, water main from 16 St. to 26 and Merrill Sts., $175,000. D. L. Erickson, city engr. CD 7/7/45.

▲ Alta., Calgary—City, City Hall, 4 mg. reservoir 14 St. northwest north of 40 Ave., $180,000; 10 mg. reservoir, 24 St. and 64 Ave. W., $1,200,000. Jones & Morrow, 1130 Bay St., Toronto, cons. engrs. CD 10-28-49.

SEWERS, WASTE DISPOSAL

Idaho, Blackfoot—City, City Hall, sewer improv., $251,000. E. B. Steele, 124 N. E. Main St., consult. engr.

Mo., Carsonville—Sewer Dist., Clarence A. Peterson, Jr., engr., 722 Chestnut St., St. Louis, Zone 1, sewage disposal plant, appurtenances and sanitary sewer extensions, engrg., $200,000.

Mo., Glendale (St. Louis 22 P. O.)—City, City Hall, 424 N. Skinker Blvd., receives $400,000 bonds sys. of storm water sewers. Fred Horton, city engr. CD 4/28.

▲ O., Cleveland—City, City Hall, Lakeside and E. 9 St. sewer exten. at downtown Lakefront Airport, $1,000,000. J. J. Warrick, city engr. 11-21.

O., Oak Harbor—Village, interconnecting sewers and disposal, $420,000. Finkbeiner, Pettis & Strout, Inc., Jefferson St., Toledo, engrs. and archts. CD 1-4-50.

BRIDGES

Ill., Chicago—City, City Hall, converting movable bridges to fixed type bridges over North Branch of Chicago River, Diversey Blvd., Cortland St., Belmont, Western, Fullerton, Ave., Armitage Ave., $400,000.

Que., Montreal—Municipality, with Can. Govt. under Canadian Pacific R.R. tracks at Jarry St., $150,000. Henri Gibeau, City Hall, city engr.

STREETS AND ROADS

Ill., Chicago—City, City Hall, Zone 2, paving 119 St. from Ashland to Halsted St., $350,000. CD 4/25/50.

▲ North Carolina State Hy. & Pub. Wks. Comm., Raleigh.

Alamance and Orange Counties 14 mi. grading & surfacing, Route 70 from point west of Efland to point southeast of Burlington and on a new location. $1,500,000.

Davidson Co. 8.5 mi. asph. traffic bound. Route 29 from Rowan co. line to Lexington. $800,000.

Edgecombe and Halifax Counties widen, reinf. 22 ft. timber trestle bridge, Route 301 from Edgecombe co. line north of Whitakers. $600,000.

Franklin and Wake Counties widen relocation 14 mi. U. S. Route 1 from Overhead Crossing 4 mi. south of Wake Forest to Franklinton. $100,000.

Johnston and Wake Counties 15 mi. U. S. Route 70 from Clayton to point about 1 mi. south of Raleigh. $750,000.

McDowell Co. 8 mi. 24 ft. double-lane pavement of new location U. S. Route 70, between Old Fort and Ridgecrest. $1,000,000.

Mecklenburg and Cabarrus Counties 14 mi. divid. traffic lane 24 ft. pavement on new northerly alignment of route toward Concord. $1,000,000.

Pitt Co. widen, imprv. 8 mi. U. S. Route 13 from Junction with N. C. Route 121 to Junction with N. C. Route 11. $180,000.

Pitt and Greene Counties widen, imprv. 10 mi. U. S. Route 13 from point south of Snow Hill. $340,000.

Randolph and Guilford Counties 20 mi. new location from end of Thomasville By-pass, southerly to High Point, Route 29, point east of Greensboro. $2,000,000.

▲ Pennsylvania State Hy. Dept., Harrisburg.

Dauphin Co.—truck by-pass, Route 22 at Harrisburg by exten. of Cameron St. northward to Linglestown Rd. $2,500,000. E. E. Schmidt, chief engr.; Ch. engr.

S. D. Winner City, paving. $125,000. Fulton & Cramer, 922 Trust Bldg., Lincoln, Neb., consult. engrs.

AIRPORTS

▲ Tex., Houston—AIRPORT, City, Oscar Holcombe, mayor, City Hall. 2nd Municipal Airport. $5,000,000. Thomas B. Bourne Assoc., Inc., Dupont Circle Bldg., Wash., D. C., consult. engrs.; CD 10-11-45.

LATIN AMERICA

Mexico, Acapulco—Mexican Govt.—E. de F. Nacionales de Mexico, Gen. Mgr., E. F. plans K-600 kwt. thermoelectric pl. $925,000.

Mexico, Mexico City—Mexican Govt.—Sria. de F.P., Mexico D.F., Mexico plans National School of Medicine. $700,000.

PUBLIC BUILDINGS

▲ Calif., San Mateo—GARAGE—City, City Hall. 3 over open-deck 7-thwart 50-unit garage. $1,300,000.

▲ Calif., Santa Ana—FIRE STATION, at City voted bonds. $475,000. Fire station votes $1,765,000 approved.

Colo., Englewood—SCHOOL—Englewood School Dist., Englewood, approved bond issue elementary school and addition to present school, addition to present school on new Englewood High School. $875,000.

Ill., Berkeley—SCHOOL—Berkeley School Dist. 87, noted plans. Wetherell & Gunderson, Jefferson Bldg., Peoria, Ill., consult. engrs. $570,000.

▲† Ind., Newport—PLANT—Atomic Energy Comm., 1901 Constitution Ave. N.W., Wash., D.C., Army Ordnance plant, Wabash River-Indiana Ordnance Works, Vermillion co. $5,000,000.

▲ Kan., Wichita—SCHOOL—Bd. Educ. plans by Topeka Architect, N. Topeka Sr. High School. $2,250,000. CD 4-4-45.

▲ Miss., Jackson—COLLEGE—Hinds Co. Court, plans for Junior College. $1,500,000.

Mo., Normandy—SCHOOL—Normandy Educ. Dist., Normandy, Bd. Educ., K. M. Rhoads, Supt., 8700 Eastern Ave., Normandy, approved $450,000 bond issue June 10 election for 3 schools, 1 room addition. Mackey and Sinn, architects, Boatmen's Bank Bldg., St. Louis, noted plans for Garfield and Washington schools. Wennemer & Hawes, 915 Olive St., St. Louis, consult. engrs.; CD 5-4-50.

▲ N. Y., Baldwinsville—SCHOOL—City, Junior H.S. $2,152,000.

▲ N. Y., Great Neck—SCHOOL—Great Neck Free School Dist. 7, Great Neck, voted $1,000,000.

N. C., Durham—PARKING—City, parking bldg. off Corcoran St. $500,000.

Okla., Stillwater—A. & M. COLLEGE—ENGINEERING—Board of A. & M. Colleges, Oklahoma City, Okla., plans addition to engineering bldg. $400,000. Mechanical engineering bldg. $250,000. CD 2-23-50.

▲ Okla., Stillwater—HOSPITAL—STUDENT—Board of A. & M. Colleges, Oklahoma City, Okla., plans addition to student hospital. $450,000.

Pa., Emlenville—HOSPITAL—Lansing State Auth., 18 East Hess St., Harrisburg, plans by Easler, Young & Schultze, 1500 Walnut St., Philadelphia, patients' bldg., addition to Emlenville State Hospital. $566,400. Quarters for female employees. $357,600. A. F. Jones & Hemmer, engr.; CD 4-13-50.

▲ Pa., Harrisburg—OFFICE—Dpt. Property & Supplies, Harrisburg, plans by Edge, Atherton & Davis, Hotel Harrisburg, Harrisburg, Eastern Service Center for the Unemployment Compensation Bureau and Dpt. Labor & Industry. $6,000,000. W. P. Jeffers, Jr., engr.; ch. engr.; CD 3-2-50.

Pa., Phila.—BARRACKS—General State Auth., 18 and Herr Sts., Harrisburg, plans by Davis & Poole, Otis Bldg., barracks for Pennsylvania State Police, Belmont Ave. $480,000. CD 3-2-50.

Pa., Phila.—WAREHOUSE—General State Auth., 18 and Herr Sts., Harrisburg, warehouse at Philadelphia Eastern State Penitentiary. $800,000.

Consultants, 845 N. 19 St., Zone 30, consult. engrs.; A. F. Jones & Hemmer, engr.; CD 2-23-47.

▲ Pa., Scotland—COTTAGES, etc.—General State Auth., 18 and Herr Sts., Harrisburg, 5 cottages providing housing for 168 children at Pennsylvania School for the Deaf, Scotland. $1,200,000. Classroom bldg., addition. $425,000. Gymnasium addition and construction of indoor swimming pool. $250,000. A. F. Jones, Jr., engr.; CD 2-23-50.

Va., Fairfax—COURT HOUSE—Fairfax Co., Fairfax, 2 story, partly 3 story, brick addition, courthouse and jail, including Memorial Hy. and Chain Bridge Rd. $980,000.

▲ Wash., Vancouver—SCHOOL—School Bd., Vancouver, plans High School Hospital. $1,500,000. CD 11-23-49.

▲ Alaska, Juneau—TERRITORIAL OFFICE—Territory of Alaska, Juneau, plans by Fels & Malcolm Jarvais, 1 story, brick, territorial office. $1,260,000. CD 4-13-50.

▲ Ont., Niagara Falls—HOSPITAL—General, noted plans by Gordon S. Adamson, Niagara Falls, 3 story hospital addition. $1,500,000.

▲ Sask., Saskatoon—DWELLINGS—Municipality, 200 low rental dwellings. $1,400,000.

COMMERCIAL BUILDINGS

▲ Conn., New Haven—ANTHROPOLOGY CENTER, etc.—Yale University, New Haven, plans by Douglas Orr, 111 Whitney Ave., New Haven, and Eero Saarinen, Bloomfield Hills, Mich., brick, stone faced anthropology center. $5,000,000; brick, stone graduate dormitory, Museum of Natural History, Sachem and Whitney Aves. $400,000; brick, steel, concrete Yale School of Engineering, Durham Laboratory, Hillhouse Ave. $1,000,000; brick, stone Yale Hall School of Forestry, Prospect St. $500,000; brick, stone college unit, theology engineering. $2,250,000; brick, stone unit, engineering. $3,500,000. CD 4-7-50.

Idaho, Coeur d'Alene—TELEPHONE—Interstate Tele. Co., S. 124 Howard St., Spokane, Wash., new phone bldg. $500,000.

Ia., Spencer—HOSPITAL—Spencer Memorial Hospital, Spencer, plans by Slaughter, Hough & Associates, Iowa Power Bldg., Des Moines, hospital. $512,852.

Md., Baltimore—RESIDENCE—Hugh A. Cutler, Realty Co., Inc., 202 E. 25 St., plans by K. C. Miller, 2301 N. Charles St., Zone 18, sixty-two 1 and 1½ story, 22x26x8-12 ft. masonry residences, 4000-4024 Alameda, 2400-2424 Guilford Ave. $472,100.

Md., College Park—SHOPPING CENTER—College Park Shopping Center, College Park, Md., plans by Berla & Abel, 1216 Tomlinson Ave. N.W., Wash., D.C., 19 store shopping center, with 350 car capacity parking area, Baltimore Blvd., Lakeview Rd., Algonia. $500,000.

▲ Mo., Clayton (St. Louis S. P.O.)—STORE—Ike Ewert & Co., Inc., 2 story, Zone 1 remodel, steel, brick, Washington Ave., at Jackson Blvd., Zone 1 remodel, steel, brick, cast stone. Approx. $1,000,000.

Neb., Omaha—APARTMENT—Omaha Educational Assn., 937 City Nat'l Bank Bldg., plans by W.

▲ N. J., Hillside—APARTMENT—Housing cooperative apartment. $650,000.

▲ N. J., Long Branch—APARTMENT—Joseph J. Bonnet, Jr., 1 Broadway, Elizabeth, plans by Mayo and Mayo, Port Elizabeth, for apartment, with 12 percent of street fronting ground floor area for tennis courts and 2 story shopping center, to be known as Lewis Park. $43,000,000.

N. Y., Auburndale—APARTMENT—Olive Gardens, Inc., Kew & Kissena Joints, 44 Court St., Brooklyn, Zone 2, plans 2 story, 24 apartment, 2 family dwellings. $453,000.

▲ N. Y., Elmhurst—APARTMENT—Lenox Realty Corp., 1 Lefferts Pl., Brooklyn, Zone 2, plans apartment, 171 Broadway at Bowne Ave. $1,150,000.

▲ N. Y., Rego Park—APARTMENT—Arthur Rosenblatt, 1133 Broadway, New York, N. Y., Zone 17, 124 apartment, 2 family dwellings, 63rd Dr. to 108 St. $4,225,000.

▲ N. Y., Rego Park—APARTMENT—Lenox Realty Corp., 1 Lefferts Pl., Brooklyn, plans 12 F. 48 St., New York, Zone 17, 2 story, 24 apartment, 102 F. Main St., 64 Rd. to 64 Dr. and 63 Dr. to Ave. $1,250,000.

N. C., Charlotte—SCHOOL—Education Assn., Charlotte, plans by Walter W. Hook & Assoc., 101 W. Trade St., 2 story, 15 classroom, Cleveland Rd. $600,000.

▲ N. C., Durham—APARTMENT—Duke University, Durham, plans by Horace Trumbauer, Packard Bldg., Philadelphia, Pa., apartment and frat. bldg. $1,000,000. CD 4-6-50.

N. C., Hickory—APARTMENT—Fairview Apartments, G. A. L. Finley, Hickory, G. A. Creed, 1618 Hunter St., Greensboro, R. C. and H. A. McNeely, Builders, Inc., Charlotte, twenty-four 1 story apartments. $446,961.

Pa., Lewisburg—LIBRARY—Bucknell University, Lewisburg, 3 Ten Clarke Bertrand Library. $750,000. CD 4-11-46.

▲ Pa., Pittsburgh—APARTMENT—Harry Kamin, Box 5042, plans by Philip Friedman, 121 S. Negley Ave., 3 story, bonnit, brick, tile apartment, Center and Negley Sts. $2,500,000.

▲ Tex., Fort Worth—DWELLINGS—Shelby Owens & Assoc., 2201 B Ave., 184 frame, masonry dwellings. $1,250,000.

▲ Tex., Galena Park—DWELLINGS—R. A. McWilliams, Merle Culperson Bldg., Houston, 100 cedar shake frame dwellings, Decatur and Fish Sts., off Clinton Dr. $1,050,000. Straeter & Miller, Milam Bldg., Houston consult. engrs.

▲ Tex., Houston—DWELLINGS—Airline Development Corp., 5214 Airline St., 75 frame, masonry dwellings, Sect. 2, Braeburn Terrace. $650,000; 100 frame, brick dwellings, concrete slab fdns., Sect. 3, Braeburn Terrace. $875,000.

Tex., Houston—DWELLINGS—A. C. Pique, 7110 Lyons Ave., 20 asb. frame, cedar shakes dwellings, concrete slab fdns. $490,000.

Tex., Wichita Falls—HOTEL—Marchman Hotel & Morgan Hotels, Wichita Falls, plans by Turner Kirkham, 803 Bluff St., 9 story, bonnit, brick hotel addn., concrete pier and beam fdns. $750,000.

Ont., Portsmouth—HOUSES—Cataraqui Co-operative Housing Co. Ltd., 0. A. Earl, pres., 50 houses, Johnson and Pulpit Rd. Approx. $600,000.

▲ Ont., Toronto—HOTEL—Dr. Paul Simon, Westminster Hotel, Jarvis St., 11 story, 100 room hotel, Richmond St. E. $1,000,000.

Que., Westmount—DWELLING—Alexis Nihon, 1010 Ste. Catherine W., Montreal, 12 story apartment dwelling on site of Atwater Park. $700,000.

INDUSTRIAL BUILDINGS

▲ Ga., Brunswick—POWER PLANT—Georgia Power Co., Marietta St., N.W., Atlanta, steam electric power plant. $5,000,000 (of first unit).

Ga., Lithonia—PLANT—Vulcan Materials Co., c/o O. W. Ahrs & Co., P. Hayes Trego, Jr., Aurora, architects, rock crushing mfg. plant. $500,000.

Ind., Indianapolis—PARKING GARAGE—William H. Trimble, 6215 Spring Mill Rd., 2 story, 117'x149'x95' ft. steel, concrete open-air type parking garage, Meridian and New York Sts. $350,000-$500,000.

▲ Kan., Kansas City—FACTORY—Fasteners Metric & Co., Fasteners Metric Bldg., 600 S. Michigan Ave., Chicago, Ill., plans factory, on Hy. 169, east of Turner. $5,000,000. Stone & Webster Engr. Corp., 49 S. Clark St., Chicago, Ill., consult. engrs.; CD 5-3-24.

La., Blanchard—GAS COMPRESSOR STATION—Arkansas Louisiana Gas Co., Commercial Bldg., Shreveport, gas compressor station. $450,000.

Mo., Kansas City—TERMINAL—Pacific Intermountain Express Co., 2300 E. 27 St., Los Angeles, Calif., truck freight terminal. $500,000.

Neb., Sidney—OIL REFINERY—The Flinn Co., Findlay, Ohio, oil refinery. $500,000. George Sewards, engr. in charge.

N. Y., Long Island City—FACTORY—Speed Products Co., 47-16 Northern Blvd., plans by David Lewis, 70 E. 45 St., New York, Zone 17, 3 story factory, Queens Blvd. from Dunn St. to 42 Pl. $300,000.

O., North Olmsted—PLANT—Owens-Williams Inc., 101 Prospect St., S.W., Cleveland, cement block, steel, brick process plant. 277'x277' and 60'x277'. $500,000.

Pa., Coaldale—PLANT—Lehigh Navigation Coal Co., Inc., 143 Liberty St., New York 6, N. Y., new Breaker Plant. Of N. R. Collery. $500,000.

▲ Tenn., Memphis—PLANT—Kimberly-Clark Corp., New Wrapper plant addn. $2,000,000.

▲ Tex., Freeport—PLANT—Dow Chemical Co., Freeport, new plant. $5,000,000; ethylene plant $6,000,000; vinyl plant, $8,000,000; styrene plant, $3,500,000; chlorine plant, $2,750,000; ethylene plant, $4,000,000; power plant, $750,000.

▲ Ont., Niagara Falls—PLANT—Canadian Cellucotton Products Co. Ltd., 431 Victoria St., 4 story, concrete and steel, 120'x120' plant. $1,230,000. Owen Kelly, C.E. Owner, engr.

UNCLASSIFIED

Kentucky — RURAL DISTRIBUTION LINES — Fl-myers Rural Electric Cooperative Corp., Flemingsburg, Ky., rural distribution lines, engrs., Bareen Co. $600,000.

▲ New York and New Jersey—PIPE LINE—Transcontinental Gas Pipe Line Corp., Oil and Gas Bldg., Houston, Tex., 31.2 mi. extension main pipe line from East Chatham, N. J., to Bay Ridge, Long Island, N. Y., 26 in. dia. $3,585,082. CD 1-12, under Texas and New York.

N. C., Greensboro—COLISEUM, A.A.F., Memorial Coliseum, Greensboro, to include sports arena type. $850,000.

Pa., West Chester—SWIMMING POOL—General State Auth., 18 and Herr Sts., Harrisburg, swimming pool and gymnasium addition at West Chester State Teachers College. $625,000. H. A. Berkheimer & A. D. Tyson, Engr. Bldg., engrs. and archts. A. F. Jones, Jr. & Hemmer, engr.; CD 7-11.

Wyoming — PIPE LINE—Phillips Oil Co., Casper, 12 in. pipe line from Kaycee oil field to Tex Basin. $550,000.

▲ Ont., Toronto—EXHIBITION—Canadian National Exhibition Assn., C.N.E. Grounds, Toronto, 3 story, exhibition annex and show ring. Demolition, demonstration rooms, etc. Approx. $3,000,000.

Ont., Toronto—SHOW RING—Royal Winter Fair Bd., J. W. Walker, pres., Exhibition Grounds, Dufferin Ave., show ring and provision for seating. $500,000.

CONSTRUCTION REPORTS-Second Section

WATER SUPPLY

BIDS ASKED

N. D., Cavalier—B.A. 7/6. City water treatment plant, $125,000. T. F. Sorge, 2 E. 9 St., Grand Forks, engr. CD 3-22

Ore., Portland—B.A. 7/11. City water supply, 45 mi. 36-in. steel water mains from Mt. Tabor Reservoir 2 to N.E. 57 and Sacramento Sts. Plans deposit $25. L. D. Aperon, city engr.

CONTRACTS AWARDED

Md., Baltimore—Bureau Water Supply, 33d Municipal Bldg., 4,460 lin. ft. 48-in. water mains, 12 lin. ft. 36-in. water mains, 30 lin. ft. 30-in. water mains, 40 lin. ft. 20-in. water mains, 1,100 lin. ft. 16-in. water mains, 1,100 lin. ft. 12-in. water mains, 1,100 lin. ft. 8-in. water mains, 1,100 lin. ft. 6-in. water mains, 1,100 lin. ft. 4-in. water mains, 1,100 lin. ft. 2-in. water mains, 1,100 lin. ft. 1-in. water mains, 1,100 lin. ft. 0.5-in. water mains, 1,100 lin. ft. 0.25-in. water mains, 1,100 lin. ft. 0.125-in. water mains, 1,100 lin. ft. 0.0625-in. water mains, 1,100 lin. ft. 0.03125-in. water mains, 1,100 lin. ft. 0.015625-in. water mains, 1,100 lin. ft. 0.0078125-in. water mains, 1,100 lin. ft. 0.00390625-in. water mains, 1,100 lin. ft. 0.001953125-in. water mains, 1,100 lin. ft. 0.0009765625-in. water mains, 1,100 lin. ft. 0.00048828125-in. water mains, 1,100 lin. ft. 0.000244140625-in. water mains, 1,100 lin. ft. 0.0001220703125-in. water mains, 1,100 lin. ft. 0.00006103515625-in. water mains, 1,100 lin. ft. 0.000030517578125-in. water mains, 1,100 lin. ft. 0.0000152587890625-in. water mains, 1,100 lin. ft. 0.00000762939453125-in. water mains, 1,100 lin. ft. 0.000003814697265625-in. water mains, 1,100 lin. ft. 0.0000019073486328125-in. water mains, 1,100 lin. ft. 0.00000095367431640625-in. water mains, 1,100 lin. ft. 0.000000476837158203125-in. water mains, 1,100 lin. ft. 0.0000002384185791015625-in. water mains, 1,100 lin. ft. 0.00000011920928955078125-in. water mains, 1,100 lin. ft. 0.000000059604644775390625-in. water mains, 1,100 lin. ft. 0.0000000298023223876953125-in. water mains, 1,100 lin. ft. 0.00000001490116119384765625-in. water mains, 1,100 lin. ft. 0.000000007450580596923828125-in. water mains, 1,100 lin. ft. 0.0000000037252902984619140625-in. water mains, 1,100 lin. ft. 0.00000000186264514923095703125-in. water mains, 1,100 lin. ft. 0.000000000931322574615478515625-in. water mains, 1,100 lin. ft. 0.0000000004656612873077392578125-in. water mains, 1,100 lin. ft. 0.00000000023283064365386962890625-in. water mains, 1,100 lin. ft. 0.000000000116415321826934814453125-in. water mains, 1,100 lin. ft. 0.0000000000582076609134674072265625-in. water mains, 1,100 lin. ft. 0.00000000002910383045673370361328125-in. water mains, 1,100 lin. ft. 0.000000000014551915228366851806640625-in. water mains, 1,100 lin. ft. 0.0000000000072759576141834259033203125-in. water mains, 1,100 lin. ft. 0.00000000000363797880709171295166015625-in. water mains, 1,100 lin. ft. 0.000000000001818989403545856475830078125-in. water mains, 1,100 lin. ft. 0.0000000000009094947017729282379150390625-in. water mains, 1,100 lin. ft. 0.00000000000045474735088646411895751953125-in. water mains, 1,100 lin. ft. 0.000000000000227373675443232059478759765625-in. water mains, 1,100 lin. ft. 0.0000000000001136868377216160297393798828125-in. water mains, 1,100 lin. ft. 0.00000000000005684341886080801486968994140625-in. water mains, 1,100 lin. ft. 0.000000000000028421709430404007434844970703125-in. water mains, 1,100 lin. ft. 0.0000000000000142108547152020037174224853515625-in. water mains, 1,100 lin. ft. 0.00000000000000710542735760100185871124267578125-in. water mains, 1,100 lin. ft. 0.000000000000003552713678800500929355621337890625-in. water mains, 1,100 lin. ft. 0.0000000000000017763568394002504646778106689453125-in. water mains, 1,100 lin. ft. 0.00000000000000088817841970012523233890533447265625-in. water mains, 1,100 lin. ft. 0.000000000000000444089209850062616169452667236328125-in. water mains, 1,100 lin. ft. 0.0000000000000002220446049250313080847263336181640625-in. water mains, 1,100 lin. ft. 0.00000000000000011102230246251565404236316680908203125-in. water mains, 1,100 lin. ft. 0.000000000000000055511151231257827021181583404541015625-in. water mains, 1,100 lin. ft. 0.0000000000000000277555756156289135105907917022705078125-in. water mains, 1,100 lin. ft. 0.00000000000000001387778780781445675529539585113525390625-in. water mains, 1,100 lin. ft. 0.000000000000000006938893903907228377647697925567626953125-in. water mains, 1,100 lin. ft. 0.0000000000000000034694469519536141888238489627838134765625-in. water mains, 1,100 lin. ft. 0.00000000000000000173472347597680709441192448139190673828125-in. water mains, 1,100 lin. ft. 0.000000000000000000867361737988403547205962240695953369140625-in. water mains, 1,100 lin. ft. 0.0000000000000000004336808689942017736029811203479766845703125-in. water mains, 1,100 lin. ft. 0.00000000000000000021684043449710088680149056017398834228515625-in. water mains, 1,100 lin. ft. 0.000000000000000000108420217248550443400745280086994171142578125-in. water mains, 1,100 lin. ft. 0.0000000000000000000542101086242752217003726400434970855712890625-in. water mains, 1,100 lin. ft. 0.00000000000000000002710505431213761085018632002174854278564453125-in. water mains, 1,100 lin. ft. 0.000000000000000000013552527156068805425093160010874271392822265625-in. water mains, 1,100 lin. ft. 0.0000000000000000000677626357803440271254658000543713569641113281250-in. water mains, 1,100 lin. ft. 0.00000000000000000003388131789017201356273290002718567848205566406250-in. water mains, 1,100 lin. ft. 0.000000000000000000016940658945086006781366450013592839241027832031250-in. water mains, 1,100 lin. ft. 0.0000000000000000000846532947254300339068322500679641962051391601562500-in. water mains, 1,100 lin. ft. 0.00000000000000000004232664736271501695341612503398209810256958007812500-in. water mains, 1,100 lin. ft. 0.000000000000000000021163323681357508476708062516991049051284790039062500-in. water mains, 1,100 lin. ft. 0.0000000000000000000105816618406787542383540312584955245256423950195312500-in. water mains, 1,100 lin. ft. 0.00000000000000000000529083092033937711917701562924776226282119750976562500-in. water mains, 1,100 lin. ft. 0.000000000000000000002645415460169688559588507814623881131410598754882812500-in. water mains, 1,100 lin. ft. 0.0000000000000000000013227077300848442797942539073119405657052993774414062500-in. water mains, 1,100 lin. ft. 0.00000000000000000000066135386504242213989712695365597028285264968872070312500-in. water mains, 1,100 lin. ft. 0.000000000000000000000330676932521211069948563476827985141426324844360351562500-in. water mains, 1,100 lin. ft. 0.0000000000000000000001653384662606055349742817384139925707131624221801757812500-in. water mains, 1,100 lin. ft. 0.00000000000000000000008266923313030276748714086920699628535658121109008789062500-in. water mains, 1,100 lin. ft. 0.000000000000000000000041334616565151383743570434603498142678290605545043945312500-in. water mains, 1,100 lin. ft. 0.0000000000000000000000206673082825756918717852173017490713391452729701995849609375-in. water mains, 1,100 lin. ft. 0.00000000000000000000001033365414128784593589260865087453566957263648509979248046875-in. water mains, 1,100 lin. ft. 0.000000000000000000000005166827070643922967946304325437267834786318242549896240234375-in. water mains, 1,100 lin. ft. 0.0000000000000000000000025834135353219614839731521627186339173931591212749481201171875-in. water mains, 1,100 lin. ft. 0.00000000000000000000000129170676766098074198657608135931695869657956063747406005859375-in. water mains, 1,100 lin. ft. 0.000000000000000000000000645853383830490370993288040679658479348289780318737030029296875-in. water mains, 1,100 lin. ft. 0.0000000000000000000000003229266919152451854966440203398292396741448901593685150146484375-in. water mains, 1,100 lin. ft. 0.00000000000000000000000016146334595762259274832201016991461983707244507968425750732421875-in. water mains, 1,100 lin. ft. 0.000000000000000000000000080731672978811296374161005084957309918536222539842128753662109375-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000403658364894056481870805025424786549592681112699210643768310546875-in. water mains, 1,100 lin. ft. 0.00000000000000000000000002018291824470282409354025127123932747963405563496053218841552734375-in. water mains, 1,100 lin. ft. 0.000000000000000000000000010091459122351412046770125635619663739817027817480266094207763671875-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000050457295611757060233850628178098318699085139087401330471038818359375-in. water mains, 1,100 lin. ft. 0.00000000000000000000000000252286478058785301169253140890491593495425695437006652355194091796875-in. water mains, 1,100 lin. ft. 0.000000000000000000000000001261432390293926505846265704452457967477128477185033261775970458984375-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000006307161951469632529231328522262289837385642385925166308879852294921875-in. water mains, 1,100 lin. ft. 0.00000000000000000000000000031535809757348162646156642611311449186928211929625831544399261474609375-in. water mains, 1,100 lin. ft. 0.000000000000000000000000000157679048786740813230783213056557245934641059648129157721996307373046875-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000788395243933704066153916065282786229673205298240645788609981536865234375-in. water mains, 1,100 lin. ft. 0.00000000000000000000000000003941976219668520330769580326413931148366026491203228943049907684326171875-in. water mains, 1,100 lin. ft. 0.000000000000000000000000000019709881098342601653847901632069655741830132456016144715249538421630859375-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000098549405491713008269239508160348278709150662280080723576247692108154296875-in. water mains, 1,100 lin. ft. 0.00000000000000000000000000000492747027458565041346197540801741393545753311400403617881238460540771484375-in. water mains, 1,100 lin. ft. 0.000000000000000000000000000002463735137292825206730987704008706967728766557002018089406192302703857421875-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000012318675686464126033654938520043534838643832785010090447030961513519287109375-in. water mains, 1,100 lin. ft. 0.00000000000000000000000000000061593378432320630168274692600217674193219163925050452235154807567596435546875-in. water mains, 1,100 lin. ft. 0.000000000000000000000000000000307966892161603150841373463001088370966095819625252261175774037837982177734375-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000015398344608080157542068673150054418548304790981262613058788701891899108886718750-in. water mains, 1,100 lin. ft. 0.00000000000000000000000000000076991723040400787710343365750272092741523954906313065293943509459495544433593750-in. water mains, 1,100 lin. ft. 0.000000000000000000000000000000384958615202003938551716828751360463707619774531565326469717547297477722167968750-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000019247930760100196927585841437568023185380988726578266323485877364873886108398437500-in. water mains, 1,100 lin. ft. 0.00000000000000000000000000000096239653800500984637929207187840115926904943632891331617429386824369430541992187500-in. water mains, 1,100 lin. ft. 0.000000000000000000000000000000481198269002504923189646035939200579634524718164456658087146934121847152709960937500-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000024059913450125246159482301796960028981726235908222832904357346706092357635498046875-in. water mains, 1,100 lin. ft. 0.00000000000000000000000000000120299567250626230797411508984800144908631179541114164521786733530461788177490234375-in. water mains, 1,100 lin. ft. 0.000000000000000000000000000000601497836253131153987057544924000724543155897705570822608933667652308940887451171875-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000030074891812656557699352877246200036227157794885278541130446683383262157440185546875-in. water mains, 1,100 lin. ft. 0.00000000000000000000000000000150374459063282788496764386231000181135788974426392705652233416916310787200927734375-in. water mains, 1,100 lin. ft. 0.000000000000000000000000000000751872295316413942483821931155000905678944872131963528261167084581553936004638671875-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000037593614765820697124191096557750045283947243606598176413058354229077696800231933593750-in. water mains, 1,100 lin. ft. 0.00000000000000000000000000000187968073829103485620955482788750226419736218032990882065291771145388484001159667968750-in. water mains, 1,100 lin. ft. 0.000000000000000000000000000000939840369145517428104777413943751132098681090164954410326458855726942420005798339843750-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000046992018457275871405238870697187556604934054508247720516322942786347121000289916992187500-in. water mains, 1,100 lin. ft. 0.00000000000000000000000000000234960092286379357026194353485937783024670272541238602581614713931735605001449584960937500-in. water mains, 1,100 lin. ft. 0.000000000000000000000000000001174800461431896785130971767429688915123351362706193012908073569658678025007247924804687500-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000058740023071594839256548588371484445756167568135309650645403678482933901250362396240234375-in. water mains, 1,100 lin. ft. 0.00000000000000000000000000000293700115357974196282742941857422228780837840676548253227018392414669506251811981201171875-in. water mains, 1,100 lin. ft. 0.000000000000000000000000000001468500576789870981413714709287111143904189203382741266135091962073347531259059906005859375-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000073425028839493549070685735464355557195209460169137063306754598103667376562952995300292968750-in. water mains, 1,100 lin. ft. 0.00000000000000000000000000000367125144197467745353428677321777785976047300845685316533772990518336882814764976501464843750-in. water mains, 1,100 lin. ft. 0.000000000000000000000000000001835625720987338726767143386608888929880236504228426582668864952591684414073824882507324218750-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000091781286049366936338357169330444446494011825211421329133443248129584220703691241244506835937500-in. water mains, 1,100 lin. ft. 0.00000000000000000000000000000458906430246834681691785846652222232470059126057106645667216240647921103518456212234497070312500-in. water mains, 1,100 lin. ft. 0.000000000000000000000000000002294532151234173408458929233261111162350295630285533228336081203239605517592281061248779296875-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000011472660756170867042294646166305555811751478151427666141680406016198027587961405306243896484375-in. water mains, 1,100 lin. ft. 0.00000000000000000000000000000057363303780854335211473230831527779058757390757138330708402030080990137939807026531219482421875-in. water mains, 1,100 lin. ft. 0.000000000000000000000000000000286816518904271676057366154157638895293786953785691653542010150404950689699035132659741210937500-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000014340825945213583802868307707881944764689347689284582677100507520247534484951751656632987060546875-in. water mains, 1,100 lin. ft. 0.00000000000000000000000000000071704129726067919014341538539409723823446738446422913385502537601237672424758758283164935302734375-in. water mains, 1,100 lin. ft. 0.000000000000000000000000000000358520648630339595071707692697048619117233692232114566927512688006188362123793791415824676513671875-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000017926032431516979753585384634852430955861684611605728346375634400309418106189689570791233825683593750-in. water mains, 1,100 lin. ft. 0.00000000000000000000000000000089630162157584898767926923174262154779308423058028641731878172001547090530948447853956168127441406250-in. water mains, 1,100 lin. ft. 0.000000000000000000000000000000448150810787924493839634615871310773896542115290143208659390860007735452654742239769780840637207031250-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000022407540539396224691981730793565538694827105764507160432969543000386772632737111988489042031860351562500-in. water mains, 1,100 lin. ft. 0.00000000000000000000000000000112037702696981123459908653967827693474135528822535802164847715001933863163685559942452101591796875-in. water mains, 1,100 lin. ft. 0.000000000000000000000000000000560188513484905617299543269839138467370677644112679010824238575009669315818427799712260507958984375-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000028009425674245280864977163491956923368533882205633950541211928750483465790921389985613025397949218750-in. water mains, 1,100 lin. ft. 0.00000000000000000000000000000140047128371226404324885817459784616842669411028169752706059643752417328954606949928065126989746093750-in. water mains, 1,100 lin. ft. 0.000000000000000000000000000000700235641856132021624429087298923084213347055140848763530298218762086644773034749640325634948730468750-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000035011782092806601081221454364946154210667352757042438176514910938104332238651737482016281747436523437500-in. water mains, 1,100 lin. ft. 0.00000000000000000000000000000175058910464033005406107271824730771053336763785212190882574554690521611932586874100814087182617187500-in. water mains, 1,100 lin. ft. 0.000000000000000000000000000000875294552320165027030536359123653855266683818926060954412872773452608059662934370504070435913085937500-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000043764727616008251351526817956182692763334190946303047720643638672630402983146718525203521795654296875-in. water mains, 1,100 lin. ft. 0.00000000000000000000000000000218823638080041256757634089780913463816670954731515238603218193363152014915733592626017608978271484375-in. water mains, 1,100 lin. ft. 0.000000000000000000000000000001094118190400206283788170448904567319083354773657576193016090966815760074578667963130088044891357421875-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000054705909520010314189408522445228365954167738682878809650804548340788003728933398156504402244567871093750-in. water mains, 1,100 lin. ft. 0.00000000000000000000000000000273529547600051570947042612226141829770838693414394048254022741703940018644666990782522011222839355468750-in. water mains, 1,100 lin. ft. 0.000000000000000000000000000001367647738000257854735213061130709149854193467071970241270113708519700093223334953912612610056114196777343750-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000068382386900012892736760653056535457492709673353598512063505685425985004661166747695630630502805709838867187500-in. water mains, 1,100 lin. ft. 0.00000000000000000000000000000341911934500064463683803265282677287463548366767992560317528427129925023305833738478153152514028549194335937500-in. water mains, 1,100 lin. ft. 0.000000000000000000000000000001709559672500322318419016326413386437317741833839962801587642135649625116529168692390765762570142746972656250-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000085477983625016115920950816320669321865887091691998140079382106782481255826458434619538288128507137348632812500-in. water mains, 1,100 lin. ft. 0.00000000000000000000000000000427389918125080579604754081603346609329435458459990700396910533912406279132292173097691440642535685674243164062500-in. water mains, 1,100 lin. ft. 0.000000000000000000000000000002136949590625402898023770408016733046647177292299953501984552669562031395661460865488457203212678428371215820312500-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000106847479531270144901188520400836652332358864614997675099227633478101569783073043274422860160633921418560791015625-in. water mains, 1,100 lin. ft. 0.00000000000000000000000000000534237397656350724505942602004183261661794323074988375496138167390507848915365216372114301603169607092803955078125-in. water mains, 1,100 lin. ft. 0.000000000000000000000000000002671186988281753622529713010020916308308971615374941877480690836952539244576826081860571508015848035464019775390625-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000133559349414087681126485650501045815415448580768747093874034541847626962228841304093028575400792401773200988769531250-in. water mains, 1,100 lin. ft. 0.00000000000000000000000000000667796747070438405632428252505229077077242903843735469370172709238134811144206520465142877003962008866004943847656250-in. water mains, 1,100 lin. ft. 0.000000000000000000000000000003338983735352192028162141262526145385386214519218677346850863546190674055721032602325714385019810044330024719238281250-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000166949186767609601408107063126307269269310725960933867342543177309533702786051630116285719250990502216501235961914062500-in. water mains, 1,100 lin. ft. 0.00000000000000000000000000000834745933838048007040535315631536346346553629804669336712715886547668513930258150581428596254952511082506179809570312500-in. water mains, 1,100 lin. ft. 0.000000000000000000000000000004173729669190240035202676578157681731732768149023346683563579432738342569651290752907142981274762555412530899047851562500-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000208686483459512001760133828907884086586638407451167334178178971636917128482564537645357149063738128127770654495239257812500-in. water mains, 1,100 lin. ft. 0.000000000000000000000000000010434324172975600088006691445394204329331920372558366708908948581845856424128226882267857453186906406388532724761962890625-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000521716208648780004400334572269710216466596018627918335445447429092292821206411344113392872659345320319426636238098144531250-in. water mains, 1,100 lin. ft. 0.000000000000000000000000000026085810432439000220016728613485510823329800931395916772272371454614641060320567205669643631467266015971331811904907226562500-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000001304290521621950011000836430674275541166490046569795838613618572730732053016028360283482181573363300798566590595245361328125000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000652145260810975005500418215337137770583245023284897919306809286365366026508014180141741090786681649928329529762268066406250000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000326072630405487502750209107668568885291622511642448959653404643182683013254007090870545393340824964964164764881134033203125000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000163036315202743751375104553834284442645811255821224479826702321591341506627003545435272696670412482482082382440567016601562500000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000081518157601371875687552276917142221322905627910612239913351160795670753313501772717636348335206241241041191220283508300781250000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000040759078800685937843776138458571110661452813955306119956675580397835376656750886358818174167603120620520595610141754150390625000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000020379539400342968921888069229285555330726406977653059978337790198917688328375443179409087083801560310260297805070877075195312500000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000010189769700171484460944034614642777665363203488826529989168895099458844164187721589704543541900780155130148902535438537597656250000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000005094884850085742230472017307321388832681601744413264994584447549729422082093860794852271770950390077565074451267719268798828125000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000002547442425042871115236008653660694416340800872206632497292223774864711041046930397426135885475195038782537225633859634399414062500-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000001273721212521435557618004326830347208170400436103316248646111887432355520523465198713067942737597519391268612816929817199707031250000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000636860606260717778809002163415173604085200218051658124323055943716177760261732599356533971368798759695634306408464908599853515625000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000318430303130358889404501081707586802042600109025829062161527971858088880130866299678266985684399379847817153204232454299926757812500000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000159215151565179444702250540853793401021300054512914531080763985929044440065433149839133492842199689923908576602116227149963378906250000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000079607575782589722351125270426896700510650027256457265540381992964522220032716574919566746421099844961954288301058113574981689453125000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000039803787891294861175562635213448350255325013628228632770190996482261110016358287459783373210549922480977144150529056787490844726562500000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000019901893945647430587781317606724175127662506814114316385095498241130555008179143729891686605274961240488572075264528393745422363281250000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000009950946972823715293890658803362087563831253407057158192547749120565277504089571864945843302637480620244286037632264196872711181640625000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000004975473486411857646945329401681043781915626703528579096273874560282638752044785932472921651318740310122143018816132098436355590820312500000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000002487736743205928823472664700840521890957813351764289548136937280141319376022392966236460825659370155061071509408066049218177795410156250000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000001243868371602964411736332350420260945478906675882144774068468640070659688011196483118230412829685077530535754704033024609088897705078125000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000621934185801482205868166175210130472739453337941072387034234320035329844005598241559115206414842538765267877352016512304544448852539062500000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000310967092900741102934083087605065236369726668970536193517117160017664922002799120779557603207421269382633938676008256152272224426269531250000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000155483546450370551467041543802532618184863334485268096758558580008832461001399560389778801603710634691316969338004128076136112213134765625000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000077741773225185275733520771901266309092431667242634048379279290004416230500699780194889400801855317345658484669002064038068056106567382812500000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000038870886612592637866760385950633154546215833621317024189639645002208115250349890097444700400927658672829242334501032019034028053283691406250000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000019435443306296318933380192975316577273107916810658512094819822501104057625174945048722350200463829336414621167250516009517014026641845703125000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000009717721653148159466690096487658288636553958405329256047409911250552028812587472524361175100231914668207310583625258004758507013320922851562500000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000004858860826574079733345048243829144318276979202664628023704955625276014406293736262180587550115957334103655291812629002379253506660461425781250000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000002429430413287039866672524121914572159138489601332314011852477812638007203146868131090293775057978667051827645906314501189626753330230712890625000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000001214715206643519933336262060957286079569244800666157005926238906319003601573434065545146887528989333525913822953157250594813376665115356445312500000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000607357603321759966668131030478643039784622400333078502963119453159501800786717032772573443764494666762956911476578625297406688332557678222656250000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000303678801660879983334065515239321519892311200166539251481559726579750900393358516386286721882247333381478455738289312648703344166278839111328125000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000151839400830439991667032757619660759946155600083269625740779863289875450196679258193143360941123666690739227869144656324351672083139419555664062500000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000075919700415219995833516378809830379973077800041634812870389931644937725098339629096571680470561833345369613934572328162175836041569709777832031250000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000037959850207609997916758189404915189986538900020817406435194965822468862549169814548285840235280916672684806967286164081087918020784854888916015625000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000018979925103804998958379094702457594993269450010408703217597482911234431274584907274142920117640458336342403483643082040543959010392427444458007812500000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000009489962551902499479189547351228797496634725005204351608798741455617215637292453637071460058820229168171201741821541020271979505196213722229003906250000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000004744981275951249739594773675614398748317362502602175804399370727808607818646226818535730029410114584085600870910770510135989752598106861114501953125000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000002372490637975624869797386837807199374158681251301087902199685363904303909323113409267865014705057292042800435455385255067994876299053430557250976562500000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000001186245318987812434898693418903599687079340625650543951099842681952151954661556704633932507352528646021400217727692627533997438149526715278625488281250000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000593122659493906217449346709451799843539670312825271975549921340976075977330778352316966253676264323010700108863846313766998719074763357639312744140625000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000296561329746953108724673354725899921769835156412635987774960670488037988665389176158483126838132161505350054431923156883499359537381681819656372070312500000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000148280664873476554362336677362949960884917578206317993887480335244018994332694588079241563419066080752675027215961578441749679768690840909828186035156250000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000074140332436738277181168338681474980442458789103158996943740167622009497166347294039620781709533040376337513607980789220874839884345420454914093017578125000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000037070166218369138590584169340737490221229394551579498471870083811004748583173647019810390854766520188168756803990394610437419942172710227457046508789062500000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000018535083109184569295292084670368745110614697275789749235935041905502374291586823509905195427383260094084378401995197305218709971086355113728523254394531250000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000009267541554592284647646042335184372555307348637894874617967520952751187145793411754952597713691630047042189200997598652609354985543177556864261627197265625000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000004633770777296142323823021167592186277653674318947437308983760476375593572896705877476298856845815023521094600498799326304677492771588432130813598632812500000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000002316885388648071161911510583796093138826837159473718654491880238187796786448352938738149428422907511760547300249399663152338746385794216065406799316406250000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000001158442694324035580955755291898046569413418579736859327245940119093898393224176469369074714211453755880273650124699831576169373192897108032703399658203125000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000000579221347162017790477877645949023284706709289868429663622970059546949196612088234684537357105726877940136825062349915788084686596448554016351699829101562500000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000000289610673581008895238938822974511642353354644934214831811485029773474598306044117342268678552863438970068412531174957894042343298224277008175849914550781250000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000000144805336790504447619469411487255821176677322467107415905742514886737299153022058671134339276431719485034206265587478947021171649112138504087924957275390625000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000000072402668395252223809734705743627910588338661233553707952871257443368649576511029335567169638215859742517103132793739473510585824556069252043962478637695312500000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000000036201334197626111904867352871813955294169330616776853976435628721684324788255514667783584819107929871258551566396869755292912278034626021981239318847656250000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000000018100667098813055952433676435906977647084665308388426988217814360842162394127757333891792409553964935629275783198434877646456139017313010990619659423828125000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000000009050333549406527976216838217953488823542332654194213494108907180421081197063878666945896204776982467814637891599217438823228069508656505495309829711914062500000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000000004525166774703263988108419108976744411771166327097106747054453590210540598531939333472948102388491233907318945799608719411614034754328252747654914855957031250000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000000002262583387351631994054209554488372205885583163548553373527226795105270299265969666736474051194245616953659472899804359705807017377164126373827457427978515625000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000000001131291693675815997027104777244186102942791581774276686763613397552635149632984833368237025597122808476829736449902179852903508688582063186913728713989257812500000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000000000565645846837907998513552388622093051471395790887138343381806698776317574816492416684118512798561404238414868224951089926451754344291031593456864356994628906250000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000000000282822923418953999256776194311046525735697895443569171690903349388158787408246208342059256399280702119207434112475544963225877172145515796728432178497314453125000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000000000141411461709476999628388097155523262867848947721784585845451674694079393704123104171029628199640351059603717056237772481612938586072757898364216089248657226562500000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000000000070705730854738499814194048577761631433924473860892292922725837347039696852061552085514814099820175529801858528118886240806469293036378949182108044624328613281250000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000000000035352865427369249907097024288880815716962236930446146461362918673519848426030776042757407049910087764900929264059443120403234646518189474591054022312164306640625000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000000000017676432713684624953548512144440407858481118465223073230681459336759924213015388021378703524955043882450464632029721560201617323259094737295527011156082153320312500000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000000000008838216356842312476774256072220203929240559232611536615340729668379962106507694010689351762477521941225232316014860780100808661629547368647763505578041076660156250000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000000000004419108178421156238387128036110101964620279616305768307670364834189981053253847005344675881238760970612616007430390050404330814773684323881752789020538330078125000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000000000002209554089210578119193564018055050982310139808152884153835182417094990526626923502672337940619380485306308003715195025202165407386842161940876394510269165039062500000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000000000001104777044605289059596782009027525491155069904076442076917591208547495263313461751336168970309690242653154001857597512601082703693421080970438197255134582519531250000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000000000000552388522302644529798391004513762745577534952038221038458795604273747631656730875668084485154845121326577000928798756300541351846710540485219098627567291259765625000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000000000000276194261151322264899195502256881372788767476019110519229397802136873815828365437834042242577422560663288500464399378150270675923355270242609549313783645629882812500000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000000000000138097130575661132449597751128440686394383738009555259614698901068436907914182718917021288711280331644250232199689075135337961677635121304774656891822814941406250000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000000000000069048565287830566224798875564220343197191869004777629807349450534218453957091359458510644355640165822125116099844537567668980838817560652387328445911407470703125000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000000000000034524282643915283112399437782110171598595934502388814903674725267109226978545679729255322177820082911062558049922268783834490419408780326193664222955703735351562500000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000000000000017262141321957641556199718891055085799297967251194407451837362633554613489272839864627661088910041455531279024961134391917245209704390163096832111477851867675781250000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000000000000008631070660978820778099859445527542899648983625597203725918681316777306744636419932313830544455020727765639512480567195958622604852195081548416055738925933837890625000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000000000000004315535330489410389049929722763771449824491812798601862959340658388653372318209966156915272227510363882819756240283597979311302426097540774208027869462966918945312500000-in. water mains, 1,100 lin. ft. 0.0000000000000000000000000000000000000000000000000002157767665244705194524964861381885724912245906399300931479670329194326686159104

CONTRACTS AWARDED

▲ New York—Bureau Contracts & Accounts, Albany, reconstruct 8.3 mi. Route 54 between Hammondsport and Keuka, Steuben Co., to Bero Eng. & Constr. Corp., Mackey Bldg., Bellaire, $1,002,537. Bids 5-10. CD 5-11, under LB.

† North Carolina—Bureau Pub. Roads, Dept. Commerce, 1440 Columbia Pike, Arlington, Va., grading, drainage, 0.928 mi., 0.137 mi. reinforced concrete bridge, Proj. 41 Part B, Blue Ridge Parkway, Swannanoa Co. to N. B. Stewart & Co., Asheville, $463,659. Bids 5-24, awarded 6-14. CD 5-25.

▲ Pennsylvania—Pennsylvania Turnpike Comm., 33 N. 3rd St., Harrisburg, construct structures and bridges, Proj. 3.72 mi., Sect. 31 B, western extension of Turnpike, from point 50 ft. east of centerline of east track of Pennsylvania R. R. on east bank of Allegheny River easterly 19,654 ft. to point 1,200 ft. west of Lincoln Tunnel, Pa. Allegheny Co., to Mark Lindsay Contr. Co., 1442 E. 22nd St., Cleveland, $3,030,376. Bids 5-31. CD 6-5, under LB.

▲ Pennsylvania—State Hy. & Bridge Auth., 504 N. Office Bldg., Harrisburg, construct divided highway consisting of C conc. pavement 24 ft. wide on each side of an earth or concrete divisor incl. construction of 6 reinforced concrete arches and 5 reinforced concrete, continuous deck I-beam bridges, 30,944 ft. L. R. Sec. 127, 257 M Cambria, Rte. 84, relocated, from Bens Creek to the Penn-Lincoln Parkway, west, from point northwest of Conway Northwesterly towards Steubenville Pike, Allegheny Co., to Ferguson Const. Co., 311 Bouquet St., Pittsburgh, $3,336,538. Bids 5-26. CD 5-31, under LB.

Wisconsin—State Hy. Comm., Madison, c. conc. 4.081 mi. Oakwash Brooks Corners Rd., U. S. Hys. 41 and 45, Contr. 1, Proj. F 010-2 (8), to Krume Const. Co., 2775 S. 27 St., Milwaukee Zone 7, $625,975. CD 6-12, under LB.

EARTHWORK, WATERWAYS

BIDS ASKED

La.—Lake Charles—B.A. 7/5—Calcasieu Parish Police Jury, c/o Secy., Lake Charles, 1,079,500 cu. yd. channel excav.

Pennsylvania—B.A. 7/5—State Dpt. Forests & Waters, 504 Education Bldg., Harrisburg, electrical facilities for ships and warehouses at Auburn, Kennsville and Felix sites; dismantling electrical facilities at Substation S-Sites 2, 8 and 10 on Schuylkill River Existing Proj., $200,000; mooring slips at Auburn and Felix sites, incl. paving of working and storage areas and appurtenant work as part of Schuylkill River existing proj., $200,000. Plans deposit $10 each. Schuylkill River Project Engineers, 20 S. 15 St., Philadelphia.

N. S.—North Ingonish (McLeods)—B.A. 7/5—Dpt. P. Wks., Hunter Bldg., Ottawa, brkwater. Approx. $100,000. Plans deposit $20. R. Blair, c/o owner, engr.

Ont.—Port Colborne—B. A. 7/5—Secy. Dpt. P. Wks., Hunter Bldg., Ottawa, breakwater repairs. Approx. $140,000. Plans deposit $20. R. Blair, c/o owner, engr.

Iowa—B.A. 7/6—State Hy. Comm., Ames, channel change 0.075 mi. along Iowa 184 in Sec 7 and 8-70-41 FA-new, Fremont Co., under $50,000. F. R. White, engr.

† Tennessee—B.A. 7/6—U. S. Engr., Box 97, Memphis, Zone 1, embankment, 30,000 cu. yd., fertilizing and seeding 7 acres. Levee Item No. L-863-X along left bank of Mississippi River in Lake Co., Serial No. 50-N-3-176.

† Wyoming—B.A. 7/6—Bureau Reclamation, Dpt. Interior, Bldg. 1-A, Denver Federal Center, Denver, Colo., 7,000 bbl. portland cement for constr. Big Sandy Dam, Eden Proj., Spec. 3103. L. N. McCreary, engr. CD 12-14.

N. S.—Lower Wedgeport—B.A. 7/6—Secy. Dpt. P. Wks., Hunter Bldg., Ottawa, Ont., breakwater. Approx. $150,000. Plans deposit $10. R. Blair, c/o owners, engrs.

Ont.—Burlington—B. A. 7/6—Dpt. P. Wks., Hunter Bldg., Ottawa, dredging 70,000 cu. yd. sand, gravel, etc. Approx. $120,000. R. Blair, c/o owners, engrs.

Ont.—Port Arthur—B.A. 7/6—Dpt. P. Wks., Hunter Bldg., Ottawa, dredging 70,000 cu. yd. sand, gravel, etc., harbor. Equipment. Approx. $100,000. R. Blair, c/o owner, engr. CD 10-4.

† Louisiana—B.A. 7/11—U. S. Eng. Dist. of Protection, St. New Orleans, Zone 9, superstructure of gated portion of Vermilion Control Structure, located along right bank of Mississippi River Gulf Outlet Canal, about 6 mi. northwest of Baton Rouge, Div. No. 16,047-50.

† Washington—B. A. 7/11—Bureau Reclamation, Dpt. Interior, Ephrata, earthwork, pipe laying and structures, Area 1-2, Laterals and Sublaterals, East Low Canal, Columbia Basin Proj., Spec. 3045. Michael Mc-Shane, engr.

† Montana—B.A. 7/11—Bureau Reclamation, Dpt. Interior, Bldg. 1-A, Denver Federal Center, Denver, Colo., furnishing 16 4-ft. cast drainage pipe, 16 4-ft. corrugated, 3 bridge gate lifting frame and 1 set of gate slot closures for river outlets, Hungry

Specify BORDEN

FLOOR GRATINGS AND SAFETY STEPS



Made in any style and size for any floor opening and for any load.

Representatives in all principal Cities

With all these features

- Genuine Tailor made Floor Grating.
- As easy to Walk over as a solid floor—No uneven surfaces.
- Designed and recommended for minimum deflections.
- You hardly know you are walking on a floor 70% to 90% open—Only possible on Genuine Grating.
- Note symmetrical, graceful lines of whole pattern.
- Ventilating, Fire-proof — durable.

For Safety—Quality and Appearance—Specify "BORDEN"
See the Difference!
A Genuine all Purpose Floor Grating
Write for your A.I.A. file on
"BORDEN GRATINGS" and SAFETY STEPS

BORDEN METAL PRODUCTS COMPANY
ELIZABETH, N. J.

Since 1922
GUNITE
Shoot with air
for CONSTRUCTION and MAINTENANCE
Experience That Counts
Write today for complete details of our services
INDIANA GUNITE & Construction Co., Inc.
226 NORTH ALABAMA STREET
INDIANAPOLIS 4
Indiana

MOVING, RAISING, HEAVY SHORING, UNDERPINNING
National Operations
E. F. DAVID HOUSE MOVING CO.
Registered Engineers
1548 SO. VANDEVENTER AVE.
ST. LOUIS 10, MO.
Tel. Grand 3092
Established 1886

Horse Dam, Hungry Horse Project, Spec. 3099, L. N. McClellan, ch. engr.

LOW BIDDERS

† California—Bureau Reclamation, Dpt. Interior, Tracy, June 15, earthwork, structures, floodgate structures, Station 0 plus 00 to Station 9 plus 50 Delta Cross Channel, Delta Div., Central Valley Proj., near Walnut Grove, spec. 3019, from George Pollock Co., Box 903, Sacramento, $644,190. CD 5/18.

† California—U. S. Eng., Wright Bldg., Sacramento, June 15, channel repairs and levee construction along Butte Creek from 8 mi. S. E. of Chico Downstream 8.7 mi., Butte and Glenn Counties, Spec. 04-167-60-61, from Pomeroy Constr. Co., 1571 Turk St., Los Angeles, $702,987. CD 6/7.

▲† Colorado—Bureau Reclamation, Dpt. Interior, Denver, June 13, 3 earthfill dams, Carter Lake Reservoir, Colorado-Big Thompson Proj., spec. 3015, from Wells Fargo Bros. Co., Monrovia, Calif., $2,389,350. Est. $3,748,119. CD 6/1.

▲† Ky., Louisville—U. S. Eng., 836 W. Broadway, Zone 2, June 16, 2 sewage and drainage water pumping plants, Del Park Terrace, Shawnee Park and 22 other plants, Salt River Valley Proj., spec. WLS, $1,562,169, from Gentry Constr. Co., Shelbyville, Ky., alt. $1,604,328, alt. $1,614,578, alt. $1,542,189, est. $1,608,328. CD 5/17.

† Louisiana—U. S. Eng., Dist. of Pretania St., New Orleans, Zone 9, June 23, guide walls for Bayou Sorrel Lock, Iberville Parish, approx. 15 mi. south west of Plaquemine, Civil No. 16 047 50 267, from Hough-Cowgur & Co., 320 N. 4 St. St. Louis, Mo., $474,475. CD 5/17.

▲ Minn., Minneapolis—U. S. Eng., 1217 U. S. Post Office Bldg., St. Paul, Zone 1, June 13, dam, lock and dam 10, St. Anthony Falls Proj., Mississippi River, Civil No. 21 028 50 547, from A. Jensen Constr. Co., 624 Foshay Tower, and P. Stewart Sons Co., 1024 First National Bank Bldg., Omaha, Neb., $5,508,968. CD 5/24.

† Missouri—U. S. Eng., 500 Broadway, Little Rock, Ark., June 16, concrete spillway structures at Clearwater Dam, Creper, Piedmont and Wayne Counties, Civil No. 41 050 50 84, from Massman Constr. Co., 20 W. 9 St., Kansas City, Mo., $435,160. Est. $472,645. CD 5/4.

† Nebraska—U. S. Eng., 1709 Jackson St., Omaha, June 15, agriculture levees, Unit R 544, Sects. 5 and 6, near Nemaha, Iry. 25 064 50 181, from Milton Kennardt & Son, Russell, Kan., $443,940. Est. $459,747. CD 5/25.

† Washington—Bureau Reclamation, Dpt. Interior, Ephrata, June 14, Schedule 2, earthwork, pump, plant bldg., misc. structures, suction pipes and misc. pump installation, from United Concrete Pipe Corp., Baldwin Park, Calif., $441,041, alt. $472,155, Schedule 2, electrical equipment and installation, from Electric Machinery, Yakima, $33,387, alt. $45,949. All above work for Quincy Pump Plant, Columbia Basin Proj., Spec. 3036. CD 5/17.

▲ Ont., London—Upper Thames Valley Auth., London, May 20, 2,000 ft. Fanshaw Dam, 80 ft. wide at top, 400 ft. wide at base, 90 ft. high, north of here, from Foundation Co. of Ontario Ltd., 1220 Yonge St., Toronto, and Ford J. Mitrovic Co. Ltd., Calgary, Alberta, $4,000,000. CD 4/21.

CONTRACTS AWARDED

† California—U. S. Eng., Wright Bldg., Sacramento, June 15, channel concreting, tunnel, installing slide gates, etc. for Isabella Dam on Kern River near Isabella, Kern Co., Spec. 04-167-60-45, to H. C. Smith Co., 214 E. 3d St., Los Angeles, $509,527. Bids 5/18. CD 5/24, under LB.

▲† Colorado—Bureau Reclamation, Dpt. Interior, Bldg. 54, Denver Federal Center, Denver, Colo., 4 earthfill dams, Carter Lake Reservoir, Colorado-Big Thompson Proj., Spec. 3018, to Winston Bros. Co., Minneapolis, $2,389,350. Est. $3,748,119. Bids 6/12, awarded 6/15. CD 6/1, under LB.

† Virgin Islands, Charlotte Amalie, St. Thomas—Rite B. Newmeyer, Municipal Engineering and Planning Consultant, Community Facilities Service, General Services Admin., General Services Bldg., Wash., D. C., waterfront improv., St. Thomas Proj. No. 54 104 10, to Robert R. Poore, San Juan, Puerto Rico, $894,388. Bids 5/17. CD 5/19, under LB.

AIRPORTS

BIDS ASKED

Fla., Miami—SEWAGE TREATMENT PLANT, at ... Sewage Treatment Plant, Spec. ... CD 1/26/49.

† Alaska—POWER PLANT, at ... Seattle, Wash., Administrative ... Spec. ... Bids 6/12, awarded 6/15. CD 6/1, under LB.

LOW BIDDERS

† Wash., Whidbey Island—RUNWAYS, etc., at Naval Air Station, ... Bids 5/17. CD 5/19, under LB.

Specs. 24566, from Pieler Constr. Co., Shafer Bldg., Seattle, Zone 2, $479,760. CD 5/26.

CONTRACTS AWARDED

▲ Ill., Chicago—TERMINAL—City Dpt. P. Wks., City Hall, Zone 2, 2 story, 500,351 ft. reinforced brick terminal bldg., Finger B, initial construction, Contr. 2-10 Hara Field, Chicago International Airport, near Des Plaines, to Great Lakes Constr. Co., 25 E. Jackson St., Zone 4, $1,320,899, Bids 2/23, awarded 6/8. CD 3/6, under LB.

Pa., Pittsburgh—TAXIWAYS, etc.—Comrs., Allegheny Co., County Office Bldg., drainage, paving, Taxiways S and W and Contr. 11 A, drainage, paving Taxiways S and W, to D'Inardo, Inc., 306 Bouquet St., $308,025, est. $342,000 and $421,563, est. $500,000, respectively.

PUBLIC BUILDINGS

BIDS ASKED

Ga., Athens—LIBRARY—B.A. 7/3—Bd. Regents, University system of Georgia, c/o Cooper, Bond & Cooper, architects, Henry Grady Bldg., Atlanta 7 story library, at University of Georgia. Plans deposit $100. CD 11/29/48.

B. C., Vancouver—OFFICE—B.A. 7/3—Minister P. Wks., Parliament Bldgs., Victoria, 2 and part 3 story, reinforced con. 50 x 310 ft. office for Workmen's Compensation Bd., c/o B. C. Government, Victoria. Approx. $750,000. Plans deposit $25, C. C. Campbell, Parliament Bldgs., Victoria, archt. CD 6/27/49.

▲Ont., Ottawa—HOUSING—B. A. 7/4—A. J. E. Smith, engr., Central Mortgage & Housing Corp., 195 Fleet St. W., Toronto. 200 houses at Rockcliffe Airport. Tenders: Rockcliffe D.N.D. Non-Urban No. 3/50. Approx. $2,250,000. Plans deposit $10.

Ont., Sudbury—SCHOOL—B.A. 7/4—C. Bibby, secy., Public School Bd., 1 story, 21x240 ft., concrete, brick, steel. Horubin St. Proj. Constr. Approx. $250,000. Plans deposit $25. S. B. Coon & Son, 4 St. Thomas St., Toronto, archts.

Ill., Dongola—SCHOOL—B.A. 7/5—Bd. Educ., Dongola, School and gymnasium. McCoy & Wilson 220842 Main St., Mount Vernon, archts.

Md., Baltimore—SCHOOL—B.A. 7/5—City Bureau Bldg. Constr., 410 Municipal Bldg., Zone 2, 1 and 2 story, part burnt, concrete block, irregular dimensions, masonry Armistead Gardens Elementary School, $600,000. Plans deposit $100. Finney, Willcott & Assoc., 320 W. 29 St., Zone 18. Drafts. Jas. K. Wolford, 2441 N. Charles, Zone 18, mech. engr. Frank Elmo Jr., 3606 Ilchester Terrace, Zone 18, struct. engr. CD 1/3.

O., Athens—HEATING PLANT—B.A. 7/5—Dpt., Pub. Welfare, John H. Lamneck, dir., State Office Bldg., Columbus, heating plant bldg. and equip. for new power and heating plant at Athens State Hospital. H. Allen & Sons, Mansfield, archts. CD 5/31.

O., South Euclid and Lyndhurst—HIGH SCHOOL—B.A. 7/5—Bds. Educ., South Euclid and Lyndhurst, Mayfield-Gates-Paxton-Rush-Lyndhurst, 2 story, tunnel, brick, block, steel Brush High School Addn., Lyndhurst, $450,000. Charles Bacon Rowley & Assoc., 1008 Keith Bldg., Cleveland, archts. CD 6/10.

† Arizona—Nevada—AIR STATIONS—B.A. 7/6—Bureau Reclamation, Dpt. Interior, Phoenix, Ariz., quarters, ED 2 and ED 4 sub-stations, Davis Dam Proj., near Cal.-Ariz. Eagle and Ely, Ariz., Spec. 3078, Michael W. Cass, engr., Ely, Nev. ENR 6/15.

† Ariz., Bylas—SCHOOL—B.A. 7/6—Bureau, Indian Affairs, Dpt. Interior, school, 2 quarters, 1 clinic and 6-car garage on grounds of San Carlos Indian Agency. Louis H. Bradshaw, 4110 N. 16 St., Phoenix, area constr. engr.

Calif., San Jose—SCHOOL—B.A. 7/6—San Jose Unified School Dist., 108 Academic, 24 steel frame stucco Harbert, Hoover and Leigh Schools addn. incl. shop, 2 gymnasiums and locker room, $350,000. Plans deposit $50. Clark & Stronghurst, 521 Channing Ave., Palo Alto, archts. CD 10/28.

Conn., Enfield—SCHOOL—B.A. 7/6—Town Supt. D. Lee Judd, Schools, Enfield, 2 story, humid, brick, steel, school. $1,000,000. Plans deposit $35. Carl A. Nelson & Assocs., 36 Pearl St., Hartford, archts. CD 5/19.

▲†N. J., Trenton—LABORATORY, etc.—B.A. 7/6—Bureau Mines, Trenton, ore dressing laboratory and pilot plant, Spec. 6-1950, from Foundation Co. of Canada Ltd., 1 Dundas St. W., Toronto, $2,000,000. Plans deposit $100. Extended 7/20.

N. Y., New York—SCHOOL—B.A. 7/6—Supt. School Constr., Design & Constr., 49 Flatbush Ave. Extension, Brooklyn, 1 story, 48 classroom, P. S. 147, Woodhaven Blvd. and Amsterdam Ave., W. 136 and W. 138 Sts., $1,000,000. Plans deposit $50. CD 5/31.

O., McArthur—SCHOOL—B.A. 7/6—Bd. Educ., Helen Gunsett, Clerk, Vinton County Local Schools, 1 story, $1,000,000. Plans deposit $50. Champion & Champion, 1 W. 4 St., Cincinnati, archts. CD 5/31.

† Ore., Lowell—SCHOOL—B.A. 7/6—U. S. Eng., Pittock Block, Portland, school addn., CIVENG 35-026-

O., Bay Village—HIGH SCHOOL—B.A. 7/6—Bd. Education, Bay Village, 2 story, brick, steel, high school addn. Plans deposit $25. Carl A. Nelson & Assocs., 36 Pearl St., Hartford, archts. CD 5/19.

Fla., Orlando—SCHOOL—B.A. 7/7—Orange Co. Bd. Public Instruction, Orlando, Sand Lake Elementary School, 1 story, brick, concrete, steel, 6 rooms, cafeteria, kitchen, etc. Plans deposit $25. Marvin L. Fitch, 1 E. Central Blvd., Orlando, archt. CD 5/19.

▲Md., Ft. Wilson—HOSPITAL—B.A. 7/7—State Board of Public Works, Md. Port Administration, 8 story, brick, concrete, steel hospital on grounds of Ft. Wilson State T.B. Hospital, $4,000,000. Plans deposit $50. Buckler-Fenhagen, Meyer & Ayers, 24 and St. Paul Sts., Baltimore, archts. Chas. E. Daniels, Federal Bank Bldg., 24 and St. Paul Sts., Baltimore, mech. engr. Sandlass, Wiehan & Assoc., 1201 N. Calvert St., Baltimore, structural engrs. CD 12/28.

Mass., Cambridge—HOUSING—B.A. 7/7—City of Cambridge Housing Auth., 1416 Massachusetts Ave., two 3 story, burnt., 45 unit, brick, limestone, housing, Harvard and Prospect Sts., State Aided Housing Proj., Cambridge 250-5, $550,000. Plans deposit $50. W. J. Edwards, 126 State St., Boston, archt. CD 5/5.

Mass., Pittsfield—SCHOOL—B.A. 7/7—City, E. V. Brouyer, con. School Bldg. Comr., 17 Spadina Park-way, 2 story, 64,180 ft., brick, steel, school, Grange Dist., S. W. Haynes & Assoc., 936 Main St., Fitchburg, archts. CD 12/2.

Pa., Scranton—HOUSING—B.A. 7/7—Scranton Housing Auth., City Hall, general construction incl. excavating, earthwork, masonry, carpentry, plumbing, electrical and building constr., heating work, plumbing, electrical work and painting work for construction of 240 brick dwelling units and accommodations, at site, 10 two-story row houses, Calif. Valley View Terrace, Pa. 9-1, Tarentum Ward of the City. Plans deposit $50. Tarentum Ward of the City. Plans deposit $50.

Tex., Eagle Pass—HOUSING—B.A. 7/7—Eagle Pass Housing Auth., Eagle Pass, 54 unit housing $350,000. Plans deposit $40. Preiss & De Wees & Johnson, 1501-6 Majestic Bldg., San Antonio, archts. CD 12/2/49.

La., Lafayette—ELECTRICAL SUB-STATION—B.A. 7/11—City, electrical sub-station and emergency equipment for steam electric generating station. Bernard & Burk, engrs., Lafayette. CD 7/7/44.

Miss., Centreville—HOSPITAL—B.A. 7/11—W. Kinnon, Co. Centreville Hospital Proj., Spec. 535, J. H. Ryan, engineers, archt. CD 6/27/49.

† N. M., Los Alamos—HOUSING—B.A. 7/11—U. S. Atomic Energy Comm., Los Alamos, Group 14 Housing, 24 units, 2 bdrm., 11 units, 3 bdrm., 1 unit, 4 bdrm., 1 unit, Plans deposit $5. Executive Site, [illegible]

Tex., Kingsville—HOSPITAL—B.A. 7/11—Lottery Co., Kingsville Nurses Home, 1 story, [illegible] Smyth & Smyth, Lewis Alamo [illegible]

Wash., Ellensburg—STUDENT UNION, etc.—B.A. 7/12—Central Washington College of Education, Ellensburg, student union commons and men's dormitory, $4,700,000.

LOW BIDDERS

▲ Calif., Berkeley—SCHOOLS—Berkeley Unified School Dist., 1414 Walnut St., June 14, (1) 2 story, reinforced concrete, steel, brick, 21 Jefferson School, (2) construction of both schools without alternates, (3) combination of both schools with alternates, (4) Thousand Oaks Elementary School, 24 Kansas St., San Francisco. (1) $726,000 (2) $560,000 (3) $1,245,000 (4) $1,540,000. CD 5/19.

Calif., Dos Palos—SCHOOL—Dos Palos Joint Union High School Dist., Dos Palos, June 13, 1 story, steel frame, high school bldg., from State Inv. Bd. 1472, Monterey. $128,865. CD 5/17.

▲ Calif., Long Beach—GYMNASIUM etc.—City School Dist., 715 Locust Ave., June 15, gymnasium and swimming pool at Long Beach City College from James J. Barnes Co., 304 S. Lafayette Park Pl., Los Angeles, $2,428,750. Est. $1,204,500. CD 5/24.

▲ Conn., Wallingford—HOUSING—Bd. of Wallingford Housing Auth., Wallingford, June 15, 51 single family row homes, Dutch Heights, from B & Z Constr. Corp., 1111 Dutch Forest Hills, N. Y., $1,227,500, est. $850,000. CD 5/17.

▲ Fla., St. Petersburg—HOSPITAL—City, June 15, Municipal Hospital, from Lewis Const. Corp., P. O. Box M, Miami, $2,660,000. CD 4/7.

▲ N. Y., Flushing—HOUSING—New York City Housing Auth., 23 Park Row, Zone 7, June 20, foundations, appurtenances for Pomonok Houses, Proj. NY-5-2, in area bounded by 71 Ave., Kissena Blvd., Parsons Blvd., Queens Blvd., from Zechariah Constr. and Parsons Blvd., Queens Blvd., from Zechariah Constr. Co., 32 Nassau St., New York, Zone 17, $1,233,300. CD 5/24.

▲ N. Y., Port Washington—HOUSING—North Hempstead Housing Auth., Valley Stream, Bldg. 11, Manhasset, rejected bids May 24, 104 units, 13 buildings, Site A, Manhasset L. B. $845,320. Site B, Port Washington, housing, [illegible] Site A and B, Port Washington, L. B. $569,970. Site A and B, L. B. $1,417,503. CD 6/7, under Site Public School, [illegible]

▲ Pa., Doylestown—SCHOOL—Central Bucks Joint Area Auth., 11 rooms, Conwell-Egypt Elementary School, Doylestown Twp., Bucks County, from Wm. Steinmetz Co., Harrisburg, Joint

$619,842. Bids 5/23; awarded 6/15; CD 6/15; under LB.

▲† Ill., Chicago—HOSPITAL—Atomic Energy Comm., Naval Construction Army, N. A. Veatch, O. C., 6 story, bomb, steel brick construction, cancer research hospital, 50 and Ellis Aves.; operated by University of Chicago to cost, incl. equipment, $2,573,000. Bids 5/23; awarded 6/12; CD 4/5; under LB.

Ky., Hopkinsville—HOSPITAL—Commonwealth of Ky., Frankfort, receives 2 sections Main Ward Bldg., West Wing Service Wing to serve Eastern Ky. Tuberculosis Hospital, Dr., Louisville, $870,000. Bids 6/8; awarded 6/15; CD 5/16.

▲Ky., Lakeland—HOSPITAL—Commonwealth of Kentucky, New State Office Bldg., Frankfort, 2 wards addns. to Women's Bldg., Central Hospital, to Leo C. Miller Co., 33 E. Blvd., St. Louis, Mo., $1,123,000. Bids 5/18; awarded 6/7; CD 5/23; under LB.

▲ Miss., Greenville—HOSPITAL—Washington Co., Greenville hospital, to Hart Bros. Constr. Co., Deposit Guarantee Bank Bldg., Jackson, $1,200,000. Bids 4/15; CD 4/18.

▲ N. Y., New York—HOSPITAL—Board of Higher Education, Bd. of Estimate, Arthur Kramer, Chrmn., 280 Broadway, Manhattan, to erect 5 story, 200 bed addn. to Kingsbridge Veterans Hospital, Kingsbridge Rd. and Sedgwick Ave., Bronx, Zone 2, $1,916,500. Bids 6/8; CD 6/16; under LB.

▲† Washington, D. C.—MACHINE SHOP and Boiler Reconstruction Unit—Navy, Comdr. Public Works, Washington Navy Yard, Washington, D. C., general contract for 2 story machine shop addn. and boiler reconstruction unit, Bldg. 212, Constr. Shop Div., Code 440, Bureau Ships, Navy Dept., Washington, D. C., to Great Lakes Dredge & Dock Co., 7 S. Dearborn St., Chicago, Ill., $1,487,044; alt. $1,030,941. Bids 6/22; awarded 6/27; CD 6/24; under LB.

▲ Wis., Madison—HOSPITAL—City, owner; contract 7 story addn. to Wisconsin General Hospital, Univ. of Wisconsin campus, to Kraus-Merkel Constr. Co., 1 E. Main St., Madison, Wis., & Kraus-Merkel Constr. Co., 5 Park Ave., Chicago, Ill., $1,247,100. Bids 6/9; CD 6/13; under LB.

COMMERCIAL BUILDINGS

BIDS ASKED

Ala., Birmingham—BANK—B.A.—Birmingham Trust & Savings Bank, 2nd Ave., Miller, Martin & Hunter, archts., Title Guarantee Bldg., bank. Extended date; CD 6/7.

Wis., Beaver Dam—HOSPITAL—B.A.—Lutheran Deaconess Hospital, Beaver Dam, 4 story ground floor, reinforced brick hospital addn., $600,000. Plans ready 5/25. E. A. Fehlhaber, 1 W. Pine Ave., Sheboygan, archts.; CD 6/3/48.

Ark., Malvern—CHURCH—B.A.—1st Pent. Baptist Church, Malvern, Ark., plans report $90. Erwin R. Anderson, Wallace Bldg., Little Rock, archts.

Tex., Fort Worth—CHURCH, etc.—B.A. 7/11—Travis Avenue Baptist Church, 5351 Travis St., church and educational, $750,000. Joseph H. Saylors, 503 Neil P. Anderson Bldg., archt.; CD 2/2.

▲ Calif., Los Angeles—HOSPITAL—B.A. 7/13—Episcopal Diocese of Los Angeles, 1212 Wilshire Blvd., 100 bed existing hospital addn., modernization, $3,000,000. Samuel Linden, 510 S. Spring St., archt.; CD 11/1/49.

▲ Tex., Fort Worth—SERVICING—Bids Asked—Sherry Lakes & Arena, 2202 E. Ave., 184 dwellings, $1,270,000.

Wis., Milwaukee—APARTMENT—Bids Asked—1042 Knapp St., 16 unit apartment, $125,000. 823 N. Broadway, one 3 & 1/2 story apmt. bldg., 14x140 ft., and Broadway, one 4 unit apartment, $725,000.

SOON LETS CONTRACT

▲ N. H., Hanover—CLINIC—Mary Hitchcock Memorial Hospital, Manager, to soon let contract for 6 bldg. addn., $2,000,000. Eugene A. Colbert & Co., 1 Park Natl. Bank Bldg., Concord, archts.; CD 3/24.

▲ N. Y., Flushing—HOSPITAL—Fred Ehrlich Mfg. Co., Inc., Pension Committee of Textile Workers Union of America, 40 Lewis Place, Long Island City, to erect 4 story nurses' home, first unit of 300 apartments, $1,325,500. Benjamin Brownstein, 261-21 Jamaica Ave., Jamaica, archt.; CD 5/26.

▲ N. Y., New York—BANK—Bowery Savings Bank, 110 E. 42nd St., Zone 17, soon let contract 19 story bank addn., $1,500,000. York & Sawyer, 120 Park Ave., Zone 17, and Edwards & Hjorth, 1209 Avenue of the Americas, Zone 19, archts.; CD 5/16.

▲ Okla., Tulsa—HOSPITAL—Children's Hospital, 1643 E. 12 St., soon let contract hospital addn., $2,500,000. Layton, Forster, Pottorff Bldg., archts.; CD 12/27/49.

LOW BIDDERS

▲ Ia., Davenport—HOSPITAL—St. Luke's Hospital, 1229 E. High St., several wings, 42 bldgs. on 11 acre, 2 and 5 story, hospital addn., from Truesdell & Smith, Cox Bldg., Cedar Rapids, $1,500,000; CD 5/2.

▲ N. C., Greensboro—HOSPITAL—Moses H. Cone Memorial Hospital, M. Van Story, exec. sec., Ed. Trustees, Hospital, Cone Hospital, Greensboro, N. C., to Hoggard & Ellington, Jefferson Standard Life Bldg., Greensboro, archts., $2,256,000; CD 4/11.

▲ Va., Burkeville—HOSPITAL—Mary Fletcher Hospital, Inc., Lynchburg, Va., requires bids May 26; hospital

SIMPLER! COST LESS! FASTER!



Remove Key-Wedge (already attached to form).



Insert key part in slots of panel and tie. Drive in wedge part of key wedge.

KENNEY FORMS

FORMWORK IN ITS SIMPLEST FORM

with the exclusive

WALL TIE

Here is, without doubt, "the best form since Venus". And the beauty of it is that these All-Steel or Plywood-faced Steel Forms come in panels in widths from 5" to 24" and lengths from 4' to 8'. Thus, with the patented Ties shown, they can be quickly, easily locked together without nails and any panel quickly removed at any point without damage. Use for footings, walls, pilasters, columns, slabs. Rigid, strong. Again we say, look at these Ties and Fasteners—simplicity itself! We can't cover all details here—write and let us send you full information and sample parts and decide for yourself.

Put liner hook in hole of wall tie. Install loose 2" x 4" and tighten with wedge.

Keys slip speedily into position joining tie and panels in one operation. Single panels can be readily removed, at any time, with maximum ease and without disturbing other panels in the section.

New Type, non-separable waler hook (patent pending) speeds erection, reinforces wall tie and eliminates the annoyance of lost keys and wedges.

IMPORTANT: New addition to the "Kenney Form System", PLASTIC COATED PLYWOOD PANELS WITH SIMPLE ACCESSORIES—REQUIRING NO WALERS.

Write for New Bulletin

CONSOLIDATED CONCRETE FORM CORP.

P. O. Box 96 Teaneck, New Jersey

Telephone Teaneck 7-3431

Rentals or Sales

addn., L. B. $1,840,839. Will re-advertise. CD 6/5, under LB.

CONTRACTS AWARDED

▲ Calif., Sacramento—HOUSING—Bace, Lthan & Hopkins, 600 Exec. Building, Sacramento, Calif., archts. & engrs., for construction, management and heating (NO brick housing units) at Mather Air Force Base. Owner builds. $7,000,000. Joseph H. Gaylord, 222 Nell P. Anderson Bldg., Fort Worth, Tex., archts. CD 6/2.

▲ Conn., Milford—HOUSING—Milford Loans, Inc., S. A. Burkhard, pres., 23 Daniel St., 100 five-story walk-up apartments, 20 single-family units, and 20 two-family units, Orange Ave., Ward and Seaview Aves. Owner builds. $1,000,000. CD 4/4.

▲ D. C., Wash.—HOSPITAL—Children's Hospital, 13 and V Sts. N. W., 5-story, re-in-con hospital and out-patient addition and remodeling. Present hosp., W St., between 13th St. N. W. and Charles H. Tompkins, Hall 14 St. N. W. $2,043,000. Bids 3/22, awarded 6/16. CD 3/27, under LB.

Ill., Chicago—OFFICE—Raymond Mark, 670 N. Michigan St., Zone 11, 6-story, bsmt. office, to Inland Constr. Co., 134 N. La Salle St., Zone 2. $300,000. CD 6/7.

▲ Mo., Springfield—HOSPITAL—St. John's Hospital, c/o Sisters of Mercy, Mercy Hospital, 233 Carew St., general contract 6-story, bsmt., rein-con steel hospital, nurses home and boiler house, Main and Nichols Sts., to McGough Bros., 1744 University St., St. Paul, 4. Mech. $4,092,000, plumbing, heating to C. Wallace Plumbing Co., 2224 Summers St., Dallas, Tex. $2,113,685. Bids 5/17. CD 6/5, under LB.

▲ N. J., East Paterson—HOUSES, Garden Homes, c/o Erwin Gerber, archt., 1180 Raymond Blvd., Newark, 102 one family houses on East Elmwood and Willow Sections. Owner builds. $2,000,000.

N. J., Elizabeth—APARTMENT HOUSE, Stevens Garden, c/o Erwin Gerber, archt., 1180 Raymond Blvd., Newark, 6-story apartment, 24x252 Elmar Pl. Owner builds. $392,600.

▲ N. J., Fair Lawn—HOUSES, Fred Burnett, c/o Leonard Tennen, archt., 32 Lincoln Ave., Hasbrouck Heights, 100 houses, Ridgewood Rd. Owner builds. $3,000,000.

▲ N. J., Paramus—HOUSES—Birchwood Acres, c/o Robert Eaton, archt., Elliott Rd., Harrington Park, 119 houses on 24 acre tract, Fair Lawn Ave., south of Midland Ave. Owner builds. $1,500,000.

N. J., Paramus—HOUSES, County Builders, Inc., c/o Fred W. Hansen, Summit St. and E. Railroad Ave., Tenafly, 92 one family houses on 30 acre tract, Forest Ave. Owner builds. $800,000.

N. J., Rahway—HOUSES, No. 10 Constr. Corp., c/o Rothe & Rothe, archts., 234 44 St., New York 18, N. Y., 100 one family houses, Madison Hill Rd. Owner builds. $500,000.

▲ N. J., River Edge—HOUSES, Van Saun Park Estates, c/o Francesco Maniscalco, archt., Hackensack, and East Railroad Ave., Tenafly, 190 one family houses. Owner builds. $1,500,000.

▲ N. Y., Baxside—APARTMENTS, Louis Morton, 151 Merrick Turnpike, Forest Park, 13 six-story apartments on 4th ave. site, Bell Blvd. and 73 Ave., to be known as Windsor Park. Owner builds. $16,000,000. Schulman & Sultzbach, 4 Court Square, Brooklyn, Zone 2, archts.

▲ N. Y., Franklin Square—HOUSES, Franklin Ranch Homes, c/o Stanley Kleiman, archt., 1441 St. Nicholas Ave., Manhattan, 50 houses, Hempstead Turnpike. Owner builds. $1,100,000.

▲ N. Y., Garden City—HOUSES, Garden Estates, Zion Keister, pres., c/o John W. Ritter, Archt., Garden City, 100 houses on Hilton Ave., Meadowbrook Parkway, Mineola Blvd., Meadow Rd. Owner builds. $3,000,000.

▲ N. Y., Massapequa Park—HOUSES, Frank A. Sparta, Inc., Levitt Realty Co., 107-41 Queens Blvd., Forest Hills, 100 one family houses on Hicksville Rd., Sunrise Highway and East Lake Ave., to be known as Lake Shore Gardens. Fifty archts. $2,500,000. Typical: Frank Dudek, archt.

N. Y., New York—HOUSING—Title I, c/o Dept. of Public Housing for New York City, Municipal Building, Chatham Square and Park Row, Manhattan, 1,000 dwelling units for Rose Hill Site, Park Ave. to Lexington Ave., Zone 10. $900,000.

N. Y., Old Westbury—HOUSES, Mansion Homes, Inc., c/o Henry Atterbury, archt., 1 Wall St., New York, 100 houses on Jericho Turnpike, Post Ave., Old Westbury Rd. Owner builds. $800,000.

▲ N. Y., Roslyn—APARTMENTS, Arthur Rosenblatt, 1 Lefrak City Plaza, Flushing, 6-story apartment, Zone 2. Owner builds. $1,000,000.

N. Y., Seaford—HOUSES, Seaford Realty Co., c/o Frederick Ackerman, archt., 1 Hempstead Ave., Rockville Centre, 100 one family houses on Seaford Ave., Merrick Rd. Owner builds. $900,000.

▲ N. Y., Valley Stream—HOUSES, Frank A. Sparta, Inc., Levitt Realty Co., 107-41 Queens Blvd., Forest Hills, 100 one family houses on Hicksville Rd., Sunrise Highway and East Lake Ave., to be known as Lake Shore Gardens. Fifty archts. Approx. $6,000,000. Typical: Frank Dudek, archt.

▲ N. Y., Valley Stream—HOUSES, Levitt & Sons, Inc., Levitt Realty Co., 107-41 Queens Blvd., Forest Hills, 100 one family houses on Hicksville Rd., Sunrise Highway and East Lake Ave., to be known as Lake Shore Gardens. Fifty archts. $3,000,000.

▲ N. Y., Wantagh—HOUSES, Levitt & Sons, Inc., Levitt Realty Co., 107-41 Queens Blvd., Forest Hills, 100 one family houses on Hicksville Rd., Sunrise Highway and East Lake Ave., to be known as Lake Shore Gardens. Fifty archts. Approx. $6,000,000. Typical: Frank Dudek, archt.

▲ O., Akron—SHOPPING CENTER—F. E. Rottmayer Eastgate Realty Corp., 3 W. Flower St., shopping center, Canton Rd. between Delaware and Leland Aves., in East Akron, to Rottmayer Constr. Co., 63 E. Bartges St. Approx. $2,000,000.

▲ O., Cincinnati—APARTMENT—Washington Constr. Co., George Remus, mgr., 1010 Keith Bldg., two 5-story, bsmt., sub-bsmt., one 156x210 ft. and one 170x278 ft. brick apartments, concrete floors, separate contracts. $1,650,000.

▲ O., Dayton—HOUSING—Wright Air Force Dist. R. A. under The Pentagon, Washington, D. C., contract under The Pentagon, Washington, D. C., contract and finance 100 one and two story garden-type apartment structures at Wright-Patterson Air Force base, in area bounded by Skyway Rd., Montgomery Greene Co. line and Kemp Rd., to Cowan Constr. Co., Shawnee Agency, Approx. $9,000,000. Hudgins, Thompson Ball & Assoc., 110 S. W. Main St., Federal Bond City, Okla., archts.

▲ O., Hamilton—HOMES—Vista Homes, Inc., 12 and 3 St., two hundred 1-story 1 story frame homes, separate contracts. $2,340,000.

O., New Miami—RESIDENCES, Robert Wheelwright, 411 Hamilton Bldg., ninety-two 1 story, bsmt., 20x40 ft. frame residences, separate contracts. $970,000.

O., Reading—RESIDENCES, Robert Redwine, 1574 Westview Ct., eighty 1½ story, bsmt., frame residences, separate contracts. $800,000.

▲ O., Rocky River—HOMES—John Strohm, 2301 Riverside Dr., 80 or 90 homes in Gasser Blvd., Hilliard, Wooster and Center Ridge Rds., incl. 2 new streets, 24½ acre park, separate contracts. $1,500,000.

▲ Tex., Bergstrom Field (P. O. Austin)—HOUSING—Air Installation Office Bergstrom Field, Austin, contract, manage and finance military housing, to Hubbell & Assoc., 1010 Perry-Brooks Bldg., Austin. Est. $4,000,000. CD 4/5.

Tex., Houston—DWELLINGS, Airline Development Corp., 5214 Airline St., 100 dwellings, area Sect. 1, Briarhurst Terrace, to Heims Building Corp., 5214 Airline St., Approx. $875,000. CD 6/19.

▲ Tex., Houston—DWELLINGS, Chocolate Bayou Estates, c/o W. E. Robertson, Sr., 2517 Gardenia St., sect. 2, 100 dwellings, units in portion 140 acre tract at Chocolate Bayou Rd. near Holmes Rd., W. Reid Rd., W. Robertson Constr. Co., c/o owner. Approx. $2,100,000. CD 5/8.

Tex., Pasadena—DWELLINGS, W. [illegible], Mgr., Pasadena, 116 dwellings, owner builds. $816,000. CD 5/19.

Tex., San Antonio—DWELLINGS, Durst & Gilbert, Nunez, 426 John 23rd St., 105 dwellings, own forces. Approx. $750,000. CD 6/8.

▲ Wis., Milwaukee—HOSPITAL—St. Lukes Hospital, 2900 W. Oklahoma Ave., 8-story, basement, 3-story, 44 x 117 ft. and 48 x 170 ft. hospital, to Gehl Constr. Co., 514 E. Ogden Ave., Zone 2. $1,041,343. Bids 6/6. CD 6/13, under LB.

INDUSTRIAL BUILDINGS

BIDS ASKED

Que., Montreal—SHOP—B.A. 7/3—B. Wheelwright, ch. engr., Canadian National Rys., 360 McGill St., Montreal, Car shop, extn. $150,000. G. Drummond, c/o owner, archt.

Sask., Biggar—TANK, etc.—B.A. 7/6—J. L. Charles, ch. engr., Canadian National Rys., Winnipeg, Man., Iron and steelhouse, ducts, piping and equip. in Fuel Oil Depot.

▲ Ill., Skokie—FACTORY—Bids Asked—Power Regulator Corporation, Oakton St., 1 story, 100,000 sq. ft. main plant, 1 story, 2,000 sq. ft. garage, 2 story, 30,000 sq. ft. boiler room factory, on 14 acre site, all steel, concrete floor, $1,400,000. E. O. Sessions, Eng. Co., 1 N. La Salle St., Chicago, Zone 2, engr. CD 1/6.

Ill., Chicago—PLANT—Bids Asked—Lewis-Bolyn Steel Co., 4232 S. Union Ave., 1 story, 50 x 90 ft. and 1 story, 40 x 60 ft. concrete paint shop, $60,000. A. Epsten & Bros., 2011 W. Pershing St., Zone 9, archts.

SOON LETS CONTRACT

Calif., South Gate—ASPHALT and SERVICE Station, [illegible] Ave., [illegible] Ave., [illegible] Ave.,

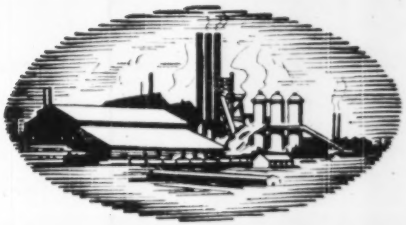

1900 ★ THE MIRACLE OF AMERICA ★ 1950

It's no stretch of the imagination, rather, robust realism to call our past half century a Miracle—U.S.A.

America has set an amazing record of progress in 50 years—but a moment in the history of civilization. A record unequalled by any other political or economic system.

Merely by broad brush strokes, we can all visualize this miracle. Remember the crystal set, the hand-cranked car, the biplane? A far cry from our FM radio, television, hydro-matic drive and supersonic planes.

And here's another phase of the miracle that went hand-in-hand with these and the myriad of intertwined technological advances—ranging from the radio telephone and Bakelite to the X-ray tube and teletype . . . and to atomic energy and its untold potentialities.

- Since 1900 we have increased our supply of machine power 4½ times.
- Since 1900 we have more than doubled the output each of us produces for every hour we work.
- Since 1900 we have increased our annual income from less than $2400 per household to about $4000 (in dollars of the same purchasing power), yet . . .
- Since 1900 we have cut 18 hours from our average work week—equivalent to two present average workdays.

How did we do it? The basic cause for this composite miracle has been the release of human energy through FREEDOM, COMPETITION and OPPORTUNITY. And one of the most important results is the fact that more people are able to enjoy the products of this free energy than in any other system the world has ever known.

THIS IS THE MIRACLE OF AMERICA . . . it's only beginning to unfold.

A PUBLIC SERVICE PROJECT ★ THE ADVERTISING COUNCIL ★

Published in the public interest by:

McGraw-Hill Publications

OFFICIAL PROPOSALS

RATE: THE RATE FOR OFFICIAL PROPOSAL ADVERTISING IS $1.00 PER LINE (OR FRACTION) PER INSERTION.

COPY RECEIVED UP TO 3.00 P. M. FRIDAY FOR ISSUE OUT FOLLOWING THURSDAY SUBJECT TO SPACE OPEN FOR LAST MINUTE ADS

SEND COPY TO OFFICIAL PROPOSAL DIVISION, ENGINEERING NEWS-RECORD, 330 W. 42ND ST., NEW YORK 18, N. Y.

Bids: July 6, 1950 (847)

New Jersey Turnpike Authority

Sealed proposals will be received by the New Jersey Turnpike Authority for

CONTRACTS NOS. 19-19A and 19B

The work to be performed under these Contracts involves furnishing, placing and compacting various graded borrow excavation materials in embankments; stabilizing existing ground by the use of vertical sand drains; excavating portions of embankments placed as overload and depositing the materials so excavated on the embankments; and in Schiller Street-Taylor area, excavating ditches for mosquito control; constructing a reinforced concrete bridge over bound creek; demolishing existing timber and concrete bridges; paving at isolated locations; providing underdrains and form drains; and other incidental work in connection with the construction of the New Jersey Turnpike from Turnpike Viaduct over Central Railroad of New Jersey in the City of Elizabeth, Union County, to Turnpike Viaduct over Central Railroad of New Jersey in the City of Newark, Essex County, New Jersey.

Principal items of work for Contracts Nos. 19A and 19B:

		Contract Contract 19A	19B
Clearing and Grubbing	Lump Sum		
Borrow Excavation, Earth	Cu. Yds.	4,600	5,400
Borrow Excavation, Rock	Cu. Yds.	300	2,500
Borrow Excavation, Muck	Cu. Yds.	15,000	25,000
Borrow Excavation	Cu. Yds.	1,350,000	1,500,000
Vertical Sand Drains	Lin. Ft.	11,000	26,000
Concrete in Bridges	Cu. Yds.	90	210
Form Drains and Sewers			
Storm Sewer	Lin. Ft.	1,700	10,300
Water Main, Various Sizes	Lin. Ft.		1,650
Demolition of Bridges	Lump Sum		

Principal items of work for Contract No. 19 repeat the same of the specific items for Contracts Nos. 19A and 19B.

If the bidder submits Proposals for more than one contract, a single Proposal Guaranty consisting of the check and the bond listed for the largest amount of work for which he is the submitter of the Proposals will be sufficient.

Proposals will be received at the office of the New Jersey Turnpike Authority, 60 Pierrepont Street, Trenton 8, New Jersey, until 10:30 o'clock EST in the morning of July 6, 1950 and thereafter will be forthwith opened and read in the Council Chamber of the War Memorial Building, Memorial Tower of Willow Street, Trenton, New Jersey, until 11:00 A.M. EST on the same date, at which time and place said Proposals will be publicly opened and read.

The award of and contract for the work is subject to proper investigation of the bidder in accordance with the qualifications adopted by the New Jersey Turnpike Authority. Bidders must submit with their proposal a typed financial statement and a statement of plant and equipment. Forms for these statements may be secured from the Engineer. Each proposal must be accompanied by a certified check or bank draft payable to the order of the New Jersey Turnpike Authority, 60 Pierrepont Street, Trenton, New Jersey, and at the office of the Consulting Engineers, Edwards and Kelcey, Frederic R. Harris, Inc. and O. H. Porter & Company, Associated, 2 William Street, Newark, New Jersey.

Each set of proposal documents comprising Contracts Nos. 19-19A and 19B will be furnished for $5.00 for each set, upon application to the Authority. The payment will not be refunded and Contract documents are not required to be returned. Plans showing grading cross-sections may be examined at the office of the Authority or at the office of the Engineer.

Proposals must be made upon the "stand" and proposal forms in the manner designated in the Standard Specifications for Construction of the New Jersey Turnpike and must be enclosed in sealed special addressed envelopes bearing the name and address of the bidder and the number of the contract on the outside, and must be accompanied by a certified check drawn to the order of the New Jersey Turnpike Authority and a proposal bond, each for not less than five (5) percent of the amount of the proposal but not less than $5,000 nor more than $20,000 as and must be delivered with proposal on or before the hour named. Copies of the proposal form to be used for submitting proposals, of the form for proposal bond, of the form to be used for financial statement and plan and equipment statement to be submitted with proposal, and special addressed envelopes are furnished in detached form with the contract documents.

The Contracts will be awarded or proposals rejected within fifteen (15) days from the date of opening proposals. The right is reserved to reject any or all proposals.

NEW JERSEY TURNPIKE AUTHORITY
Paul L. Troast
Chairman

June 27, 1950

Bids: July 18, 1950 (848)

Strengthening & Repairs to Spans

SEALED proposals addressed to the President and Trustees of the Village of ..... for "STRENGTHENING & REPAIRS TO WEST APPROACH SPANS OF SECOR ROAD" will be received at the office of the Village Clerk, in the Municipal Building, Ossining, N. Y. until 2 o'clock P.M. prevailing time, on TUESDAY EVENING, JULY 18, 1950, at which time they will be publicly opened, read and considered.

Copies of the plans, form of proposal, specifications, bond and contract may be obtained from FRANK W. BOCKEE, SUPT. of STREETS, 2 Broadway Street, Ossining, N. Y. Telephone, Ossining 7-2-2-5, upon deposit of FIVE ($5.00) Dollars which will be refunded upon the return of the plans in acceptable condition within fifteen days of the letting date.

Consideration in awarding the contract will be given on the basis of the time of completion.

The right is reserved to reject any or all bids.

By order of the President and Trustees, Village of Ossining, N.Y.

FREDERICK T. SCRIMA, Village Clerk
Secor Road
Ossining, N.Y.

June 29, 1950

Bids: July 10, 1950 (855)

Elevated Steel Water Tank

Sealed bids will be received until 3:30 o'clock A.M. July 10 A.D. 1950, in the office of the City Auditor and Clerk of Fort Lauderdale, Florida, for Elevated Steel Water Tank and Appurtenant Structures.

This work involves the installation of a 150,000 gallon elevated steel water tank on tubular tower construction.

Bidding blanks may be obtained from the office of the City Engineer. Plans and specifications for the work are on file in the office of the City Engineer and copies thereof may be obtained at the office of the City Clerk upon payment of $2.00 for each set. Any bidder, upon returning such set promptly and in good condition, will be refunded his payment and any non-bidder, upon so returning his set, will be refunded $1.00.

A certified check for 5% of the bid, made payable to the CITY of Fort Lauderdale, Florida, shall accompany each proposal as evidence of good faith and responsibility of the bidder. This check shall be retained by the City of Fort Lauderdale as liquidated damages should the bidder fail or refuse to enter into a contract with the City of Fort Lauderdale for the execution of the work embraced in the proposal, in the event the proposal of the bidder be accepted.

The City of Fort Lauderdale reserves the right to reject any or all bids.

F. D. RANKINS
City Manager

Bids: July 13, 1950 (858)

Raising Existing Earth Dam and Appurtenant Work

AT RESERVOIR NO. 7
BRISTOL, CONNECTICUT

Sealed proposals for raising existing earth dam and constructing spillway, dike, highway and highway bridge, and appurtenant work at Bristol Reservoir No. 7, in the towns of Bristol, Plymouth and Burlington, Connecticut, will be received by the Board of Water Commissioners, City of Bristol, Connecticut, at the office of the Board, 119 Riverside Avenue, Bristol, Connecticut, until 2 p.m. Eastern Daylight Saving Time, on Thursday, July 13, 1950, at which time said proposals will be publicly opened and read aloud.

Work includes about 25,000 cu. yd. of earth embankment.

Contract documents and drawings may be examined and obtained at the above office, from the office of John W. Cowper, 1500 Statler Building, Boston, Massachusetts, or City Hall, Bristol, Connecticut. Deposit will be refunded when such documents are returned in good condition within thirty (30) days after receipt of bid.

Bid security, certified check or bid bond, for 5% percent of total bid. Successful bidder must furnish 100% performance bond.

The Board reserves the right to reject any or all bids or to accept any bid should it be deemed for the interest of the City so to do.

BOARD OF WATER COMMISSIONERS
Henry J. Cote, Chairman

(Continued on page 75)

CONTRACTORS WATCH THIS SECTION

for New Projects

Publish your announcements thru the "Proposal Section" of Engineering News-Record and get their bids.

U. S. Government
(Continued from page 74)

NEW ORLEANS DISTRICT, CORPS OF ENGINEERS, Foot of Prytania Street, New Orleans, La.—Sealed bids will be received in this office until 11:00 a.m., C.S.T., July 11, 1950, and then opened for the construction of superstructure of gated portion of Morganza Control Structure, in the New Orleans District. The principal features involved are: approximately 1,500,000 lbs. reinforcing steel; 171,000 bbls. Portland cement; 4,000,000 lbs. structural steel; 2,500,000 lbs. corrosion-resisting steel, and miscellaneous other work including excavation and backfill, drainage system, and installation of 127 steel gates. Further information on application. (802)

UNITED STATES DEPARTMENT OF THE INTERIOR, Bureau of Reclamation, Sealed bids (Specification No. 3102) will be received by Bureau of Reclamation, Bismarck, North Dakota, July 18, 1950, and then publicly opened for furnishing labor and materials and performing all work for the construction of Rugby substation, Devils Lake substation, and Jamestown substation. The work is situated near Rugby, Devils Lake, and Jamestown, North Dakota. Principal items are approximately:

	Sbd 1 (Rugby)	Sbd 2 (Devils Lake)	Sbd 3 (Jamestown)
Excav	900 cu yds	700 cu yds	8,700 cu yds
Furn and hand cement	225 bbls	400 bbls	780 bbls
Furn and place rein	13,000 lbs	14,000 lbs	43,000 lbs
Furn and erect service building	One	One	One

Installing misc. elec. equip. in all three substations; and other work.

Time allowed for completion will be 270 days. For particulars, address Bureau of Reclamation, Bismarck, North Dakota, or Building 1-A, Denver Federal Center, Denver, Colorado.

MICHAEL W. STRAUS, Commissioner. (843)

OFFICIAL PROPOSALS

Bids: July 6, 1950 (845)



New Jersey Turnpike Authority

Sealed proposals will be received by the New Jersey Turnpike Authority for:

CONTRACT NO. A1

The work to be done under this Contract involves the construction of the substructure and superstructure of the Erie Railroad and County Road Overpass and other incidental work, all in connection with the Woodbridge Section of the New Jersey Turnpike, in the Town of Secaucus, Hudson County, New Jersey.

Principal items of work include:

Open Foundation Excavation	9,700 Cu. Yds.
Piling Ft.	920 Cu. Yds.
Concrete	12,700 Cu. Yds.
Reinforcement Steel	1,475,000 Lbs.
Steel Piles	140 Lin. Ft.
Structural Steel	2,100,000 Lbs.
Metal Railings	1,585 Lin. Ft.

Proposals will be received at the office of the New Jersey Turnpike Authority, 67 Prospect Street, Trenton 8, New Jersey, until 10 o'clock, D.S.T., on the morning of July 6, 1950, and thereafter in the Veterans Room of the War Memorial Building, Memorial Drive at Willow Street, Trenton, New Jersey, until 11:00 A.M., D.S.T., on the same date, at which latter time and place said proposals will be publicly opened and read.

The receipt and opening of proposals is subject to proper prequalification of the bidder in accordance with the regulations adopted by the New Jersey Turnpike Authority. Bidders must also submit with their proposal a revised financial statement and a statement of plan and equipment.

Contract documents may be seen, and may be inspected by prospective bidders, at the office of the New Jersey Turnpike Authority, 67 Prospect Street, Trenton 8, New Jersey and at the office of the Consulting Engineers, Howard, Needles, Tammen & Bergendoff, 55 Liberty Street, New York, New York.

Contract documents will be furnished for $5.00 for each set, upon application to the Authority. The payment will not be refunded and contract documents are not required to be returned.

Proposals must be made upon the standard proposal forms in the manner designated in the Standard Specifications for Construction of the New Jersey Turnpike, and must be enclosed in sealed special addressed envelopes bearing the name and address of the bidder and the number of the contract on the outside, and must be accompanied by a certified check drawn to the order of the New Jersey Turnpike Authority and a proposal bond, each for not less than five (5) per cent of the amount of the proposal, but not less than $50,000 nor more than $200,000 and must be delivered at the place designated above on or before the hour named. Copies of the proposal forms to be used for submitting proposals, of the form for the proposal bond, of the form to be used for the financial statement and for the plan and equipment statement to be submitted with the proposal and of the special addressed envelope are furnished in detached form with the contract documents.

The Contract will be awarded or the proposals rejected within fifteen (15) days from the date of opening proposals. The right is reserved to reject any or all proposals.

NEW JERSEY TURNPIKE AUTHORITY
Paul L. Troast
Chairman

June 16, 1950

OFFICIAL PROPOSALS

Bids: July 12, 1950 (844)

State Road Work

STATE DEPARTMENT OF PUBLIC WORKS
BUREAU OF CONTRACTS & ACCOUNTS
ALBANY, N. Y.

Sealed proposals will be received by Henry A. Cohen, Director, Bureau of Contracts & Accounts, 14th Floor, The Governor Alfred E. Smith State Office Building, Albany, N. Y., until ten-thirty o'clock A.M., Advanced Standard Time, on WEDNESDAY, JULY 12, 1950, for projects in the following counties:

County	Deposit plans	Bid deposit	Type	Miles	Engineer's estimate
Bronx	$50	$40,000	Lighting and Misc. Work	4.94	$ 20,000
Erie	50	85,000	S. Conc. Conc. Pav. 40' & 46' & Misc. Work & R. S. on Conc. Pipe Girder, 65°, 82½°, 64°, 64°, 82° and 87° Fa.	085	1,585,000
Kings	25	14,000	Br. Mas. M. M. Misc. Work	1.57	611,000
Madison	50	125,000	S. Conc. Conc. Pav. 2 at 25° Wide Conc. Pave Box Culv. 35° Skew Conc. Box Culv. 30° Skew 4 Sp. Alpha Beam 182' L Total. This project involves the use of Alpha Composite Construction which is patented and the royalty is $76.	6.18	2,350,000
Monroe	10	4,500	Traffic Signal Sys.	2.30	81,000
	Pro	140,000	Fill, Conc. Pav. Conc. Fills & Alpha Composite Construction which is patented and the royalty is $.34	3.68	2,500,000
Nassau	50	65,000	Traffic Divider & Misc. Work, Conc. Pavement for Wash.	10.15	1,150,000
Westchester & Putnam & N. Y.	15	50,000	Reconst. Type 1 Pave 12' Type 2 Pave 12' Type 3 Pave 12' Type 3 Pave 22' Fa.	0.19	80,000

County	Con. No.	Name	Mile	Type	Deposit	Estimated work
Supply Notice						
Bronx	FABEP 56-4	Bronx-Whitestone Expressway	4.94	Lighting Misc. Work	$50,000	$ 20,000
		Delaware-Sullivan Counties Expressway		Misc. Work	$40,000	
		Erie-Monroe Expressway		Misc. Work		
		Prog.				
		1,950,000				

OFFICIAL PROPOSALS

Maps, plans, specifications, and estimates may be obtained at the office of the Department of Public Works, Bureau of Contracts and Accounts, Albany, N. Y., and at the office of the District Engineers in whose district the roads are located. The name and address of the District Engineers will be furnished on request and may be seen at the office of the State Department of Public Works, 270 Broadway, New York City.

The deposit for Plans and Proposal Forms for each contract is indicated below. A refund will be made in full to bidders for return of one set, in good condition, within 30 days of award, or rejection of bids. Refund for all other sets in good condition, or after period, will be net cost of deposit.

Special attention of bidders is called to "General Information for Bidders" in the proposal, specification, and contract agreement, and to the special provisions applying to projects financed with federal funds. Proposal for each contract must be submitted in a separate sealed envelope with the name and number of the contract plainly endorsed on the outside of the envelope. Each proposal must be accompanied by cash, draft or certified check payable to the order of State of New York, Commissioner of Taxation & Finance, for the sum as specified in the advertisement and the proposal. The retention and disposal of the bidding check, the execution of the contract and bonds shall conform to the provisions of the Highway Law, as set forth in "Instructions to Bidders". Where optional types are permitted on contracts with federal funds, bidders must state in the space provided in the proposal the exact designation of the optional type upon which the proposal is predicated. The right is reserved to reject any or all bids.

R. D. TALLAMY
SUPT. OF PUBLIC WORKS

Bids: July 20, 1950 (846)

Force Main

Office of City Purchasing Agent
Nashville, Tennessee

Sealed bids will be received by the Purchasing Agent of the City of Nashville, Tennessee, at the office of the Purchasing Agent, until 10:00 A.M. Central Standard Time, Thursday, July 20, 1950 for a 36 inch Force Main between Wharf Avenue and 8th Avenue South, together with all appurtenances, according to plans and specifications which are on file in the office of the Director of the Nashville Waterworks Department, Room 204 City Hall, Nashville, Tennessee, and also the office of The Chester Engineers, 210 East Park Way, Pittsburgh 12, Pennsylvania. Immediately after closing time for the receipt of bids they will be publicly opened and read aloud in the office of the Purchasing Agent, City Hall.

The successful bidder will be required to furnish a satisfactory performance bond.

All bids shall be made upon the blank forms of the contract documents. Copies of all contract documents, including Proposal Form, Contract Plans and Specifications and Instructions to Bidders may be obtained at the office of The Chester Engineers by depositing Twenty-five Dollars ($25.00) for each set of documents obtained. The entire deposit will be refunded to each actual bidder and Fifteen Dollars ($15.00) will be returned to all others who return plans and specifications in good condition within ten (10) days after opening of bids.

The right is reserved by the City of Nashville, through its Mayor, to reject any and all bids, to waive any informalities in the bids received, and to accept any bid which, in the opinion, may be for the best interest of the City.

A certified check or bank draft, payable to the City of Nashville, for a satisfactory bid bond executed by the bidder and a surety company authorized to transact business in the State of Tennessee in an amount equal to Five Per Cent (5%) of the bid, shall be submitted with each bid.

No bid may be withdrawn after the scheduled time for the receipt of bids.

CITY OF NASHVILLE
TENNESSEE
E. B. SMITH
Purchasing Agent

WANTED

CONSTRUCTION ENGINEER-SUPERINTENDENT

for Contracting firm specializing in all types of sewer construction. Must know costs, and be able to lay out and supervise work. Reply, giving experience, age, date available, salary desired.

Good opportunity for an aggressive man, willing to work, and looking to the future. Bonus Participation.

UNITED FOUNDATION CORP.
RIDGELY, WEST VIRGINIA
Phone 6672

STRUCTURAL DRAFTSMEN:
Needed Several First Class experienced detaliers and checkers. Only those with previous structural fabricating shop experience need apply. Give complete information to Personnel Dept.
Consolidated Western Steel Corp.
Orange, Texas

ESTIMATOR—EXPEDITOR

Civil Engineer wanted by established Central Ohio General Contractor specializing in Commercial, Industrial and Public Works buildings.

Must have experience with same type of Contractor.

UNUSUAL OPPORTUNITY FOR ADVANCEMENT

Write giving full particulars of qualifications, age, detailed experiences, salary expected, first letter.

P-7013, Engineering News-Record
520 N. Michigan Ave., Chicago 11, Ill.

GRAVEL PLANT SUPERINTENDENT

Wanted for operating and managing portable and permanent plants in Indiana and Michigan. State experience, references and salary.

P-6208, Engineering News-Record
523 N. Michigan Ave., Chicago 11, Ill.

STRUCTURAL ENGINEERING
A Course of Instruction by Mail

FOR FORTY YEARS our courses have helped thousands to better positions and to pass State Board Examinations.

Information sent without obligation. Write today.



WILSON ENGINEERING CORP.
College House Offices - Dept. E.
Harvard Sq. Cambridge, Mass.

REPLIES (Box No.) Address to office nearest you
NEW YORK 330 W. 42nd St. (18)
CHICAGO 520 N. Michigan Ave. (11)
SAN FRANCISCO 68 Post St. (4)

CIVIL SERVICE

SITE PLANNER and Economist needed for Maryland's State Planning Commission. Standard Salary Scale for both positions $4600-5625. Merit system positions offering automatic salary increases, generous vacation and sick leave, and retirement benefits. Please contact the office of the State Employment Counselor, 1 Light Street, Baltimore 2, Maryland for complete information on closing requirements.

POSITIONS VACANT

WANTED: HEAVY Construction Estimator. Large Midwest contractor, operating nation wide, desires services of an experienced estimator familiar with current prices and methods to estimate heavy construction of all types. Field experience is desirable but necessary. Must be willing to travel extensively, mainly by air. Compensation open. Write, P-6411, Engineering News-Record.

CONTRACTOR'S ENGINEER: Technical graduate between 30 and 35 with experience as estimator and/or manager in handling construction. Knowledge of Diesel equipment desirable. Excellent opportunity with nationally operating masonry contractor. State age, education, experience, salary desired, references, and furnish recent photograph in first letter. P-6529, Engineering News-Record.

WANTED: HEAVY Concrete Superintendent. Familiar with plans and specifications of Bridges, Dams, Disposal Plants, Etc. Salary and attached permanent position. Write details of experience, age, family, health and references. P-6931, Engineering News-Record.

CONSTRUCTION SUPERINTENDENT for multiple story apartment building. Reply giving experience, age, family, health, and salary required. Reply to Bell & Fassett, 501 South Negley Avenue, Pittsburgh 32, Pennsylvania.

WANTED: STRUCTURAL Engineer & Draftsman. Permanent for [illegible] Work in Design Dept. [illegible] and Job Supervision. Send [illegible] and recent samples of Drafting [illegible] Chicago area. [illegible] Hiers-Liebenberg, Inc., Engineers, 614 Audia Building, Shreveport, Louisiana.

WANTED: FIRST class man thoroughly familiar with rock and earth core drilling and foundation grouting. Must be capable of supervising crew and keeping records of work and cores. Must be willing to travel. Salary and expenses. Give complete experience and salary expected in first letter. P-7004, Engineering News-Record.

OUTSTANDING STRUCTURAL Engineer wanted for permanent position with progressive company. Must be capable, aggressive, and willing to assume responsible supervisory and design duties. Opportunity to make substantial salary for right man. Send complete resume of experience, salary desired, and drawings and photographs of work performed before Atlanta. Give full information as to earliest date for interview at Atlanta. Atlanta location. Address P-6965, Engineering News-Record.

POSITIONS VACANT

CONSTRUCTION COMPANY, operating nation wide, specializing in structural concrete, such as bridge piers and their foundations and mass concrete such as dams, requires No. 1 bidder available to estimate jobs on basis of present-day costs capable of preparing complete, accurate and complete estimates. To be considered, complete information must be furnished. Only organization has been advised of this advertisement. P-6934, Engineering News-Record.

STRUCTURAL DETAILER-Checker. Top rate to qualified fast and accurate man. Ralph Rinker, 532 Bellevue, Trenton 8, N. J.

CONSTRUCTION SUPERINTENDENT. Experience Highway Bridges, Concrete, Decks, Abutments. Must know form work. Write in detail. Job near New York. Permanent job for right man. P-6995, Engineering News-Record.

SELLING OPPORTUNITY OFFERED

DISTRIBUTORS WANTED. Patented item used in construction field available for national or regional distribution. RW-6955, Engineering News-Record.

POSITIONS WANTED

CONSTRUCTION MGR. Good Supt. Exp. in bridges, all details of earthwork and light, tilt and allied trades. 20 yrs. exp. Salary $12,000 to start. PW-6886, Engineering News-Record.

GENERAL SUPERINTENDENT, 25 years experience. Thoroughly experienced large scale multiple buildings, earthwork, commercial, industrial and heavy construction. Address PW-6795, Engineering News-Record.

OFFICE MANAGER: C.P.A. Accountant. Several years experience in all phases of construction accounting. Masters degree in Business Administration. One year grad. work in Personnel Psychology. Reading and speaking knowledge of Spanish. Age 30, married, children. Prefer position in Mexico City. Will go anywhere. Write P-6945, Engineering News-Record.

STRUCTURAL ENGINEER, now located Chicago, to locate in steel industry, Midwest. Desires responsible position with progressive company. Experience includes plants, commercial and industrial structures, offices, stores, and homes. Will relocate. PW-6945, Engineering News-Record.

CIVIL ENGINEER, Registered P.E., N.Y. Thirty years experience in general construction, industrial, commercial, institutional, industrial buildings, bridges, dams, tunnels, sewers, water supply, sewage disposal, flood control, drainage, airports, highways, railroads, etc. Experienced in design, estimating, contracting, supervision, management, valuations, reports, arbitrations, etc. Available for consulting engineering, or as chief engineer, manager, or executive. Prefer New York City. PW-6924, Engineering News-Record.

SANITARY ENGINEER: Experienced Manager-Engineer to take charge of operation and maintenance of water and sewage plants, water distribution and sewer systems, and to supervise construction of water and sewage plants, water distribution and sewer systems. Must be capable of dealing with men and engineers. Permanent position. Write P-6944, Engineering News-Record.

PART TIME WORK WANTED

ENGINEER SKILLED sales designer. Know cost methods, tests and contracting practices. Registered. Civil. Let's discuss your needs. Box 884, Philadelphia 5, Pa.

SELLING OPPORTUNITY WANTED

SALES ENGINEER: Electric office furniture. Have outstanding opportunity for representation in New England. Ex. Prof. Engineering degree. Specialized in sales of mechanical or electrical equipment. Will be in charge of office, handling engineering. Excellent sales record. RA-7001, Engineering News-Record.

BUSINESS OPPORTUNITY

Commissary Man (illegible) of many years selling to [illegible] and operate commissary [illegible] available. Large Crew of [illegible] labor. [illegible] Engineering News-Record.

DREDGES
Design and Appraisals
R. ROYAL ROANE
2787 BOULEVARD JERSEY CITY 6, N. J.
Phone JOurnal Sq. 2-5756

ESTIMATING SERVICE
Any Trade and Type of Project
Literature and Sample on request
Construction Survey Cooperative
101 Park Ave., New York 17, N. Y.
MUrray Hill 5-7317 Founded 1922

SUBMERGED PIPE LINE CONSTRUCTION
BOYCE COMPANY
Phone 3-2530 Clearwater, Fla.

USED EQUIPMENT

AVAILABLE FOR QUICK DELIVERY

CRANES, SHOVELS, HOES

BUCYRUS ERIE TD-9 DOZER-SHOVEL, extra blade. Good condition.

HOUGH MODEL HLD PAYLOADER, hyd. bucket control and backfiller blade. Mfd. in 1947. Excellent condition.

HOUGH MODEL HLD PAYLOADER, w gravity dump bucket. Mfd. in 1946. Good condition.

HOUGH MODEL HLA PAYLOADER, 62" hyd. bucket control. Mfd. in 1947.

LORAIN L-41 SHOVEL, powered by GMC Diesel engine with circulatory heater, elec. starter, mtd. on crawlers. Mfd. in 1948. New-guarranteed.

P & H MODEL 600, 1¼ YD. CRAWLER SHOVEL, pow. by gas. eng.ne.

UNIT MODEL 514 ½ YD. CRAWLER with Hoe and Crane Boom. New 1947. Excellent condition.

BUY OF THE MONTH

CATERPILLAR RD-8 with LaPlante Choate hydraulic bulldozer. Rebuilt.

TRACTORS

A-C MODEL HD-7 TRACTOR, 63" tread, 18" shoes, hyd. oper. Gar Wood bulldozer, starter, canopy top. Mfd. in 1947. Good condition.

I-H TD-6 DIESEL CRAWLER TRACTOR 50" tread, B-E hyd. bulldozer. Mfg. in 1949. Excellent condition.

I-H TD-18, 74" tread, w elec. starter and lights, std. equip. & Isaacson hyd. bulldozer. Mfg. in 1947. Good condition.

COMPRESSOR

I-R 500, 2 STAGE COMPRESSOR Waukesha Dies. engine, clutch, elec. starter, 4 pneu. tires. Reconditioned.

CONCRETE MIXERS

REX 11S END DISCH. CONCRETE MIXER, complete with water tank, power loader, 4 cyl. Wisc. engine, 2 pneu. tired wheels. Mfd. in 1948. Good condition.

REX 16S END DISCH. CONCRETE MIXER, with power loader, water tank, 4 cyl. Wisc. air-cooled engine, mtd. on 4 pneu. tired wheels. Mfd. in 1948. Excellent condition.

EXPORT SERVICE — SUBJECT TO PRIOR SALE — IMMEDIATE DELIVERY

Distributors of Thew-Lorain Cranes & Shovels—International Harvester Tractors—Chain Belt "Rex" Equipment—Barber-Greene Bituminous & Material Handling equipment—Adams Graders—Hough Pay-loaders and others.

EHRBAR

SINCE 1903

UNION, N. J.	BROOKLYN, N. Y.	WESTBURY, L. I.
Unionville 2-7400	Evergreen 3-5000	Westbury 7-1990

FOR SALE

USED EQUIPMENT

1—¾ Yd. Shovel, Model 1 Northwest Caterpillar Year Model 1929, Serial #2966, Powered with Waukesha Gas Engine, Condition Good. Mfd. Overhauled 1949. Price $1,000.00.

2—Shovel Front Attachments, ¾ Yd. Backing-Type B Steam Shovels, Bodine, Scoop & Dipper, Condition Excellent. Price $500.00 each.

2—Air Cooled Motors, Waukesha XBA, Reconditioned & Tested 4 months. Price $200.00 each.

1—Electric Lift Truck, Yale Model KM-10-2M with Hoist & Tilting, Capacity 2000 lb. Includes 2 Exide Batteries & Charger. Condition Good. Price $1,500.00.

10—¾ Ton Side Dumping Buggies for Above. Price $25.00 each.

1—Speed Reducer, Model 5DA, Ratio 7.00, 110 H.P. Complete with Couplings, Ratio 11.00 to 1 Silent Chain Drive. Reconditioned. Condition Excellent. Price $1,000.00.

1—Masonry Saw, Model HE, Clipper complete with 2½ H.P. Dayton Motor. Condition Good. Price $150.00.

1—Electric Generator, Model DAD, Rotating 1½ H.P. 5 KVA 440 Volt 3 Phase 60 Cycle. Condition Good. Price $350.00.

1—G-E Generator, Type TEA, Style 4, Class 2 Pole, Rotating 60 CYCLE 3 PHASE 2 KW 1800 R.P.M. Includes Exc. & Rheostat. Condition Good. Price $300.00.

1—Vibratory Feeder, Model EMH-10, Serial 1134, Vibrator Unit Complete with Feed Hopper. Condition Good. Price $100.00.

1—Air Compressor, 600 P. Buffalo Rail Mounted Stage, Mounted on Interchangeable Truck Chassis. Condition Complete with Truck. Complete Unit Good. Price $1,000.00.

1—Dust Fan, Model 4-WI-HP, American Blower Type F. Condition Good. Price $200.00.

1—Apron Feeder, Link Belt, 24" Wide x 25' Long, 7½ Motor. Condition Good. Price $500.00.

1—Ball Crusher, 30" Smith Type C. Condition Good. Price $400.00.

1—Bucket Elevator, Link Belt, 24"x25'-0" Buckets 10"x7"x8". Complete with Chain. Condition Good. Price $600.00.

1—Screen, Link Belt, 3 D.P., 5'x12', 2" & 3" Cloth. Price $100.00.

1—Sectional Conveyor, Extendible 20'-0" to 34'-0" x 17" with Motor, Hopper & Protective Chute. Condition Good. Price $200.00.

THOMASVILLE STONE AND LIME COMPANY
THOMASVILLE, PA.

G.E. 44 TON DIESEL ELECTRIC

LOCOMOTIVE

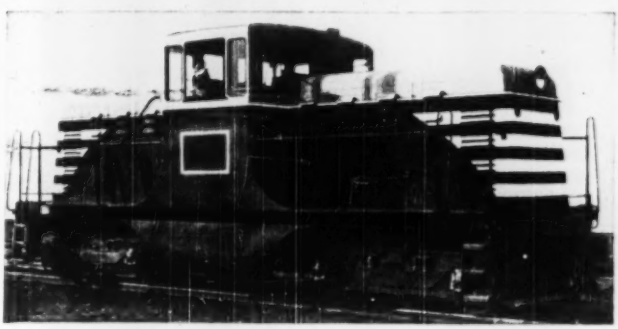

STANDARD GAUGE—RECENTLY REBUILT

Priced for a Quick Sale

WRITE or WIRE

FS-6998, ENGINEERING NEWS-RECORD
330 West 42nd St., New York 18, N. Y.

• STRUCTURAL STEEL SHAPES •

New and Used—Immediate Delivery

At present our inventory of steel shapes and forms includes a full line of both new and used steel especially for heavy construction work. 4" I beam to 36" Girder Beam. 14" Columns 287# 398#

BEARING PILE SECTION

Stock list on request. Write, wire or phone.

HY DRACHMAN STEEL CORPORATION

Warehouse
14-23 34th Ave., Astoria L. I., N. Y.
Astoria 8-8023; 8-4484-5

Sales Office
563 E. Tremont Ave., New York City, N. Y.
Cypress 9-5440-1

1—Cat D8 with DDPCU L.P. C Dozer
1—D6 almost new. L. P. C Dozer
1—D2 Cat Tracks on ½ Yd Bucket
1—Link Belt Backhoe Model LS40. Rebuilt
1—54B Hi-Lift Shovel. 1946 Model
2—Gar Wood Scrapers. Model 525 90 PCT New. A real buy
2—Scoopmobiles. Demonstrators
1—Lima ¾ Paymaster Shovel Diesel
1—Marion 48 2½ Yd Dragline Boom 95' Boom

CHAS. M. INGERSOLL CO.
19930 Detroit Rd. Rocky River, O.
Edison 1-1010

FOR SALE OR RENT

ALL LATE MODELS

1—N.W. Shovel, 2½ c.y. Model 80 D
1—N.W. Shovel, 1½ c.y. Model 6
1—N.W. Shovel ¾ c.y. Model 25
Optional as Crane or Backhoe
1—Caterpillar D-8 Angledozer
1—Caterpillar D-7 Bulldozer

WILLIAMS CONSTRUCTION CO.
Box 145 Middle River Baltimore 20, Md.
Phone—Essex 1310

Lorain 820 Shovel. 1948
Marion 1½ Yd Dragline
Buckeye ¾ Yd Shovel 1947
Osgood ½ Yd Shovel. Late Model
Osgood Model 200 ½ Yd Crane
Insley Model K-12 ½ Yd Crane
Warco Motor Grader
Cat. D8 W/St. Blade 2U3936
T. D. 9 W/Hydraulic B. E. Dozer
T. D. 6 W/Hydraulic B. E. Dozer
T. D. 18 International Bulldozer

A. C. R. COMPANY
19615 Nottingham Cleveland
Kenmore 1-8000

FOR SALE

—NEW Cedar Rapids Model ECW-3000 lb. Completely Portable Asphalt Plant with Diesel Power

McCLUNG-LOGAN
Port Covington Balto, Md.
Tel. Plaza 3720

New Guaranteed . . . 60 TON
HYDRAULIC JACKS
Navy Surplus
ILLUSTRATED CATALOG 60% off
BERKELEY DISTRIBUTORS INC.
16 JOHNSON AVE HACKENSACK N J

GRADER & ROLLER

FOR SALE

Allis Chalmers Model AD Tandem tires, fully equipped, diesel.

Huber 5 to 8 ton, Tandem, hydraulic steering, gas.

Both in excellent condition and attractive price.

LOCATED IN OUR YARD

HODGE & HAMMOND, INC.
1162 Grinnell Place, New York, 59, N. Y.
Dayton 9-5300

FOR SALE

2—1939 Mack Dump Trucks—EO Motors—F.H. Models @ $2,500.00 each.
2—1938 Mack Dump Trucks—CT Motors—F.H. Models @ $2,500.00 each.
1—1936 Model D-6 Caterpillar Tractor with Hydraulic Bulldozer—excellent condition $3,000.00
1—1936 Lorain 40 Crane, mounted on Mack Truck, excellent condition $5,000.00
3—Ingersoll-Rand Compressors 1930 Models—recently rebuilt $500.00 each

Write to Box #209
Cliffside Park, N. J.

PIPE

FOR SALE

200 ton per day Hot Mix Asphalt Plant.
30 ton electric gantry cranes
100 ton cap. pneumatic tired roller
Scotch Marine 50 H.P. boiler
6 yd. page dragline, walker, diesel power
1¼ yd. Bay City 65, drag & hoe, diesel
Asphalt Plant, Iroquois, Portable, 60 ton per hr.
¾ yd. Backhoe attachment Bay City Model 45
120 Ton per hr., 80 batches per hr. Asphalt Plant

"STONE—THE CRANE MAN"
306 Architects Bldg. Detroit 1, Mich.

FOR RENT OR SALE

CATERPILLAR D-7 to 12 sec. fully rebuilt w new tracks, hydro. dozer, etc.
CATERPILLAR D-6 w cable dozer & 1 cy. tln. ldr.
CATERPILLAR D-6 w LB. Speeder 22" cr. & CL. bkt.
LORAIN 80 Diesel 1½ cy. Shovel
BUCYRUS-ERIE 108 Diesel 1½ cy. Shovel
INSLEY mdl. K Truck Crane, 28' boom

BENDIX MACHINERY CO., INC.
[illegible]

FOR SALE

1—1½ Cu. Yd. Amsco Shovel bucket, new, complete with teeth and sheave for P & H Shovel. Price $1450.00

Phone Williams 1-8600
Hillsgrove, Rhode Island

—O. D. PIPE—

FOR IMMEDIATE SHIPMENT
BIG SAVINGS ON MANY ITEMS

Partial List of Hot Specials

Quantity	O.D.	Wall	Construction
1,500	20"	.593"	Seamless
1,800	16"	.500"	Seamless
2,300	18"	.500"	Seamless
1,600	20"	.593"	Seamless
1,100	24"	.687"	Seamless
2,000	24"	.500"	Electricweld
130,000	6 5/8"	.250"	Electricweld
4,300	20"	.281"	Seamless
1,000	20"	.312"	Seamless
700	20"	.390"	Seamless
7,500	16"	.312"	SMLS. (limited service)
15,000	20"	.281"	Electricweld (rejects)

(All items subject to prior sale)

RAILS • TRACK ACCESSORIES • STEEL PILING

LB FOSTER CO.
Pittsburgh 30, Pa. New York 7, N. Y.
Chicago 4, Ill. Houston 2, Tex.

RUBBER CONVEYOR BELTING

At Lower Prices

Top Quality—Immediate Delivery

12" widths to 36" (All plies)

TRANSMISSION BELTING
AIR HOSE (All Sizes)
SUCTION & DISCHARGE HOSE
WATER HOSE
V BELTS

Also Mill Remnants

Write or wire collect for prices & samples

E. D. HEEHS & SON
1287 Hollywood Ave. Memphis, Tenn.

FOR SALE

Reliance Crushing Plant

45" x 10" Crusher—18' Bucket Elevator
52" x 12" Roller Screen—100 Ton Capacity Bin
2 Gas. Engine Power Units

ABERTHAW COMPANY
133 Southampton St. Boston 18 Mass.

LIMA 201 Dragline

Diesel powered and equipped with 100-foot boom and 3 cu. yard Hendrix Bucket. Although three years old, machine has had little use and is in excellent condition. Location, Michigan

W. J. MEAGHER & SONS
24th & Water Sts. Bay City, Michigan
Phone 9811

PIPE FOR PILING

CONSTRUCTION CONTRACTORS: Get our attractive low, money-saving prices. We offer the following for immediate delivery:

5,000	10¾"	OD X .250" Wall	29
3,000	11¾"	OD X .400" Wall	48
5,000	12¾"	OD X .250" Wall	33
16,000	14"	OD X .375" Wall	54.6
2,000	16"	OD X .312" Wall	52.3
3,000	18"	OD X .281" Wall	53
6,000	24"	OD X .312" Wall	79
6,000	26"	OD X .280" Wall	75.82

For prices and complete information, wire or phone collect:

ALSO OTHER SIZES PIPE AND TUBING

J. M. HAUCK
Grand 3488
5543 Ashland St. Louis, Mo.

U. S. AIR CORPS TYPE
NEW, SAFER, SHOCK RESISTANT

SUN GLASSES

Reduce Eyestrain From Glare & Harmful Rays

Cool green meniscus curved lenses with gold plated frame, premium quality. Reg. $10.00 Quality. $2.25 Per 2 For $4.00. P. Post Paid



MAKE QUICK ACCURATE SIGHTS
•
NEW IMPROVED HAND

SIGHTING LEVEL

COMP. WITH U. S. ARMY PLASTIC POUCH

Precision built, easy to use. Needed when laying drains, pipe lines, foundations, grading and determining depressions or elevations.

SPECIAL LOW PRICE $1.85 SHIP. CHG. 15c EXTRA EACH

BE SAFE—BE SURE ON LAND OR SEA
Brand New U. S. Navy

POCKET COMPASS

DEPENDABLE - ACCURATE

Has Many Features Not Found in Compasses Many Times This Price.

A fine precision compass designed for hard usage. Has water tight transparent plastic case and luminous dial marked in 360 degrees. Guaranteed.

Regular $10.00 Value $3.00 P. POST PAID

1744

J. JACOB SHANNON & CO.
214 N. 22nd St. Phila. 3, Pa.
The Oldest Equipment House in Phila.

B.G. 2-41 Portable Asphalt Plant. Unused. 20 tons hourly ... $5000.00

BARBER GREEN, model 82AT crawler mounted Bucket Loader, 1 cu. yd. per minute, 18'10" boom. Overhaul cost $7500.00. Guaranteed like new ... $4000.00

BLAW KNOX Batch Plant, 3 Compartment Bin, 100 ton capacity, 3 beam batcher scales, Pioneer Conveyor 120 x 24", Mechanical Feeder, etc., Pioneer deck mixer, 7' x 12' with loading and discharge. Only been used one job. Excellent ... $7000.00

BUTLER Batch Plant, 240 tons, 4 compartment 2 cu. yd. Batchig with 4 beam scales and gravity set & under indicator. Like new ... $3250.00

BELTZEL Rock Cement Plant, 500 barrel capacity, model E-2, complete with generator. Like new ... $1000.00

CAT. Diesel D-7200 d.c. Generating Plant, 100 KW, with all accessories. Excellent ... $1000.00

B.E. 7' B.B. 2½ cu. yd. Drawline, New 1941. Diesel cat engine. Belting, best tracks, tires. Excellent condition ... $12,000.00. Must sell.

Koehring 2½ cu. yd. self propelling dragline. Wendell 4 cyl. Diesel engine. Like new. Almost new tracks. Excellent. $8500.00. Will purchase option.

LIMA 2½ cu. yd. Combination Shovel-Dragline. Rebuilt. New tracks included ... $16,500.00

2½ cu. yd. new EMSCO Shovel Bucket ... $1250.00

BUCYRUS-ERIE 22-B, 1½ Dragline, 70 Boom, Caterpillar, New 1941. Rebuilt. New tracks. Excellent condition. Used little since rebuilt ... $11,500.00

TICO Swing Crane, also dragline attachment. Like new ... $3000.00

Big 4 with Caldwell Sidebooms and Dozer. Rebuilt. New tracks, rollers, etc. ... $3500.00

Best purchase options.

WENZEL MACHINERY RENTAL & SALES CO.

2136 Jefferson St., Kansas City, Mo.

NEW SURPLUS TRACTOR SALE

SAVE $1,000

AVAILABLE AT PHILADELPHIA

$695
F.O.B. PHILADELPHIA

MOUNT A 105 CU. IN. COMPRESSOR ON THE SPACIOUS PLATFORM

COMPLETE NEW TRACTOR FOR LESS THAN THE POWER UNIT ALONE!

Here is a complete new tractor for less than the price of the JEEP power unit alone! Regular value about $1200. Uses standard parts and assemblies on which all replacement parts are available. Thrifty as Ford ... you actually save $500!

USES

- Portable power unit (power take-off has 3 speeds up to 2600 rpm). Excellent for compressors, welders, generators, pumps, concrete crushers, saws etc. (data books available).
- Car pulling (rear tow hitch).
- Towing implements, rollers, trailers, compressors, snowplows, loads.
- Jitterbug operations.
- Shop motive.
- Mounting ditchers, winches, dozers, snow plows.
- For airports, country clubs, etc.
- Ordinary 2 plow agricultural operations.

Write (or telephone or telegraph collect) today.

BERNSTEIN BROTHERS
PUEBLO, COLORADO
201 SOUTH SANTA FE - PHONE 53

SPECIFICATIONS

ENGINE: Famous fast-warming Willys Jeep engine, 3⅛" x 4⅜". Displacement 134.2 cu. in.

HORSEPOWER: Maximum HP, 60. Maximum belt HP, 46 at 2600 rpm. Rated drawbar HP, 25.

CAPACITY: Two 12-inch plows.

GOVERNOR: Variable speed, regulation from 600 to 2600 rpm.

LUBRICATION: Forced feed gear pump.

TRANSFER CASE: Low and high gear giving 6 speeds forward and 2 reverse.

TRANSMISSION: Sliding gear, 3 speeds forward and 1 reverse.

TRANSMISSION SPEEDS: 6 speeds forward, ranging from 2½ to 20.45 mph, 22½ mph for highway.

POWER TAKE-OFF: Belt pulley at rear, with 3 speeds forward and reverse.

BRAKES: Individual clutch type.

TIRES: Front 5.50 x 16. Rear 9 x 24. Adjustable tread 50" to 88".

EQUIPMENT: Single plate drive type clutch, cooling system, 6 volt ignition, fuel tank, propeller shaft, transfer case, oil filter, generator, starter, carburetor, hydraulic seat, lights, front and rear, oil bath air cleaner, muffler, differential.

FINAL DRIVE: Roller chain in sealed case.

WEIGHT: About 2400 lbs.

OVERALL DIMENSIONS: 123" long; 61" wide. Wheelbase 76½".

Littleford Distributor, 1947, Model GLRC, mounted on 1947 Dodge cab and chassis. Motor #T118-178378. Serial #81391312
Price ... $4,300.00
Littleford Trail-O-Roller, 1947, Model 155, Serial No. 50203-X-816
Price ... $1,000.00
Seaman Pulvi-Mixer, Serial M2030, complete; equipped with Ind. "SC" Rotors; Waukesha Engine 6MZA, Fuller transmission
Price ... $2,000.00

WALSH OIL CO., INC.
JOLIET ILLINOIS

FOR SALE

7—Model 38FDT Euclid Bottom Dump hauling units 15 cu. yd. capacity, 24.00 x 25 tires. New in 1948, have seen very little use. Must be seen to appreciate. Located near St. Joseph, Missouri. $15,000.00 each.

O'DELL & RINEY CONST. CO.
P.O. Box 3775 Kirkwood 22, Missouri
Phone: Terryhill 3-0780

NEW GALION #116 MOTOR GRADER

Used about one month when project was terminated. Diesel powered, extra large tires. Immediate delivery at a considerable saving below list price.

W. J. MEAGHER & SONS Phone 9811
Bay City, Michigan 24th & Water St.

FOR SALE

Model 180 Single Pumpcrete
1000' of pipe and fittings
For Quick Sale—$5500.00

ABERTHAW COMPANY
133 Southampton St. Boston 18, Mass.
Phone Highlands 5-6700

ELECTRIC

Thor SAWS

LIMITED SUPPLY • ORDER NOW
BRAND NEW! — GUARANTEED!

Capacity 2⅛" - ball bearings throughout. Adjustable for depth or bevel cutting to 45°. 110 Volts, Universal - 3500 r.p.m. - 21¾ lbs.

EQUIPMENT

One combination rip-crosscut blade - wrench - steel carrying case - 10 ft. cord and plug - tube of lubricant

SPECIAL PRICE NOW $77.50
WAS $147.50 SAVE $70.00
F.O.B. CHICAGO

TERMS: Cash With Order or C.O.D.
Saws are guaranteed to be new as represented.

MACHINERY & ELECTRIC MOTORS CO.
844 West Lake Street Chicago 7, Illinois
TELEPHONE TAylor 9-7500

Distributors for the complete line of Thor Electric Tools. Saws-Hammers-Drills-Screw Drivers-Nibblers-Impact Wrenches. A complete catalogue and price list mailed upon request.

SURPLUS EQUIPMENT

Immediately available, Granby, Colorado

1500 Bbl C.S. Johnson Cement Silo
Model 200 Colby Gantry Crane, Elect Power

Immediately available, Denver, Colorado

2—1201 Lima 3½ CuYd Shovels
2—Model 25FDT Euclids. 200 HP Cummins
7—Model 43FDT Euclids. 180 HP GMC.

All subject prior sale

GRANBY CONSTRUCTORS
60th and Colorado Blvd., Denver, Colorado

FOR SALE
½ Yard MICHIGAN SHOVEL FRONT
Never Used—TMC 16 $1500.00
VANGUARD CONSTRUCTION CORP.
369 Lexington Ave. New York City
Murray Hill 9-1484

PUMPCRETES

Rebuilt Current Models
For Sale or Rent
CONCRETE EQUIPMENT COMPANY
312 E. Wisconsin Ave.
Milwaukee 2, Wis.

GRADERS

Adams 511, Caterpillar, Austin Western—99M
Truck Cranes, Tractors
UNITED MOTOR EQUIPMENT
914 Spring St. U. S. #1 Elizabeth, N. J.

POWER UNITS

Brand New!
Government Surplus

[illegible] cut on cycle A.C. single phase 5 K.W. H.C.P. water cooled, 28 Volt Permagnet Hysterio Exciter. Remote Control, complete panel board with instruments, 150 ft. [illegible] cable with [illegible] 150 feet 2 conductor light cable with reel, [illegible] for metal case with replacement tarp and [illegible]. Cable with [illegible] worth $160. Regular price of unit $2000. Shipping wt. 12,000 lbs. Our price complete

$495.00
f.o.b. Chicago

2½ K.W. Leland Power Unit with 6½ H.P. ZZ Briggs and Stratton air cooled engine, complete with [illegible] and repair-part [illegible]. Brand New. Shipping wt. 410 lbs. Regular Price $600. Special Price, this

$295.00
f.o.b. Chicago

Net 10 days to approved rated firms—otherwise send check with order. Sold on money back guarantee. WRITE FOR ILLUSTRATED FOLDER

WELLWORTH TRADING CO.
DEPT. ENR
1831 S. State St. Chicago 16, Ill.

LOWBED TRAILER

1947 Fruehauf 40 ton, 16 7.50x15 -12 ply tires, Air Brakes, side brackets and planks, lights, side loading ledges.

C. C. & F. F. KEESLER
1515 Lincoln Ave. Prospect Park, Pa.
Phone Ridley Park 1606

FOR SALE

Two (2) Model 40-D Northwest Crane-Shovel-Draglines
Four (4) Allis-Chalmers HD-19 Tractors.
Four (4) 27FD Euclid End Dump Units.
Ten (10) 31FDT Euclid Bottom Dump Units.
One (1) Rex Dual Drum 34-E Paver.
One (1) Letourneau Model "W" Scraper.

FEHRS TRACTOR & EQUIPMENT CO.
1809-11 Cuming St. Omaha 2, Neb.

Priced to Sell. Like New

5 Super C Tournawagons	$8,000 ea
2 Super C Tournapulls New	$9,000 ea
2 A-C AD-3 graders Clean	$4,000 ea
GMC 48 pass. coach Diesel	$5,000
NW-25 shovelfront 90% new	$1,000

R. SNYDER 2-2821 Willoughby, Ohio

90 TON TRAILER

Rogers "I" Beam Model I-B-90, 1400 x 24 tires with Mack 200 H.P. Diesel LM-20 Tandem Tractor, Winch, 1100 x 24 tires. New 1946. Low mileage. Inspection N. Y. Area.

P.S.-6830, Engineering News-Record
330 W. 42nd St., New York 18, N. Y.

Notice to Advertisers

Because of the Independence Day Holiday, July 4th, the Searchlight pages of the

July 13th Issue of
ENGINEERING NEWS-RECORD

FINAL CLOSING TIME
Display and Undisplayed Ads
Wednesday, June 28th
PROPOSALS
Wednesday, July 5th

FOR SALE
1½ Yd. MARION CRANE
with Pull Shovel Attachment
Practically New
CESTONE BROS. INC.
7403 Broad Street Bloomfield, N. J.
Edison 8-8068

WANTED

WE BUY OR SELL
All Types of
TRENCHING MACHINES
AIR COMPRESSOR RENTAL CO.
19615 NOTTINGHAM RD. CLEVELAND
Kenmore 1-8000

WANTED—*At Once*
30-Cubic Yard and 50-Cubic Yard
DUMP CARS
W-6821, Engineering News-Record
520 N. Michigan Ave., Chicago 11, Ill.

WANTED
CATERPILLAR SCRAPERS
Models 70 and 80
JOHN FABICK TRACTOR CO.
3100 Gravois Ave. St. Louis 18, Mo.
Phone: Laclede 8900 L.D. 5

WANTED
Marion 111-M Shovel or Dragline
Must be in good condition and a bargain. Please give age and full particulars when quoting.
FRANK SWABB EQUIPMENT CO., INC.
Hazelton Nat'l Bank Building Hazleton, Pa.
Telephone 4918

WANTED
2—War surplus (new) 1 yard dragline buckets Hendrix TS Preferred Page RC acceptable.
JOHNSON-GREENE COMPANY
Ann Arbor, Mich. Telephone 22537

WANTED
LOCOMOTIVE
One 25, 30 or 35 ton diesel electric or diesel standard gauge locomotive.
W-6961, Engineering News-Record
330 West 42nd St., New York 18, N. Y.

WANTED
SHOVEL FRONT AND DIPPER
In excellent condition for P & H 855 L.C.
W-7000, Engineering News-Record
330 W. 42nd St., New York 18, N. Y.

WANTED
Steam Crane, late Model, for pile driving, 85 HP boiler, 70-90 ft. boom, having wide Cats.
W-6990, Engineering News-Record
330 W. 42nd St., New York 18, N. Y.

WANTED
PILE HAMMER
VULCAN #1
W-7014, Engineering News-Record
330 W. 42nd St., New York 18, N. Y.

FOR SALE

1—New Shovel Attachment For Unit 1020 Crane Below Dealer Cost

CYRIL J. BURKE, Incorporated
6451 E. McNichols Rd. Detroit 12, Mich.

PILING

1—25 ton Lifting Industrial Brown Hoist, locomotive crane, 8 wheels, 50' boom, double drum, cast steel side frames. Mfg. new 1930. Operating weight 118,000 lbs. Ser. #3926. Model 5. Completely rebuilt 1950. 150 lbs. working pressure. A.S.M.E. Boiler. Price—$5750.

M. INDURSKI
HARVARD EQUIPMENT CO. INC.
291 Cambridge St. Allston, Mass.
Telephone STadium 2-0826

For Sale or Rent
STEEL SHEET PILING

Beth. SP-4 section—First class redrivable

102 Pcs. 42 to 39 ft — 575 Pcs. 29 to 26 ft
249 Pcs. 37 to 34 ft — 586 Pcs. 24 to 20 ft
932 Pcs. 33 to 30 ft — Also Tee Pieces

IMMEDIATE SHIPMENT from Virginia

Carn. MP-101 section-practically new

1842 Pcs. 62 ft — 357 Pcs. 40 ft
64 Pcs. 56 ft — 72 Pcs. 36 to 20 ft
457 Pcs. 48 ft — Also "Y" Pieces

IMMEDIATE SHIPMENT from Kentucky

MISSISSIPPI VALLEY EQUIPMENT CO.
509 Locust St. St. Louis, Mo.

SHEET PILING

Location—Birmingham, Ala.

163 Pcs. SP6a 14 to 17 feet
60 Pcs. SP6A 11 to 14 feet
346 Pcs. SP7A 14 to 17 feet
60 Pcs. SP7A 11 to 14 feet
21 SP6A Corners
62 SP7A Corners

FRAZIER-DAVIS CONSTRUCTION COMPANY
1319 Macklind Ave. St. Louis, Mo.

FOR SALE

Bucyrus-Erie 120-B USED Shovel Boom, Dipper Stick & Dipper in Good Condition. Price $3500.00 F.O.B. Cars, Seattle.

H. T. NEAL MACHINERY CO
58 Sutter Street San Francisco

RAILS-TIES
TRACK ACCESSORIES

INTERLOCKING STEEL SHEET PILING

All lengths & strengths RENT or BUY

LB FOSTER CO.
Pittsburgh 30 New York 7 Chicago 4 Houston 2

We do a Nation-Wide business in

STEEL SHEET PILING

New & Used — Rented & Sold

351 pcs. 60&50 ft. Carn. M115-Chicago
59 pcs. 60 ft. Beth. AP1-Buffalo
62 pcs. 60 ft. Inland 127-Illinois
108 pcs. 35-30 ft. Carn. M116-Nebraska
228 pcs. 30-25 ft. Carn. M112-Minn.

Other lengths & sections at various locations

All sizes Vulcan & McKiernan Pile Hammers & Extractors for Rent and Sale—Shop Rebuilt

Regardless of location of your job, wire or write

MISSISSIPPI VALLEY EQUIPMENT CO.
509 Locust St., St. Louis, Mo.
"WE BUY STEEL PILING FOR CASH"

New **RAILS** *Relay*

Track Accessories — Steel Storage Tanks

W. H. DYER CO., INC.
1859-X Railway Exchange Bldg., St. Louis, Mo.
Stocks at Various Points

Watch—
the *Searchlight Section*
for
Equipment Opportunities

PROFESSIONAL SERVICES

Cards arranged by states, cities, names — **Additional cards on following pages**

Polk, Powell and Hendon

Engineers—Consultants

Harry H. Hendon—
Hugh A. Powell

Water Systems, Sewers and Sewage Treatment Plants, Steam and Hydro Plants, Dams, Drainage, Industrial buildings, municipal planning reports, plans, estimates and construction supervision.

620 Chamber of Commerce Bldg.,
Birmingham 3, Ala.

Palmer and Baker, Inc.

Consulting Engineers

For Problems of Transportation
Subaqueous Vehicular Tunnels
Rock Tunnels
Utility Tunnels
Bridges
Grade Separations
Highways
Airports
Traffic Studies
Parking Problems
Waterfront & Harbor Structures

Mobile, Alabama

John S. Cotton

Consulting Engineer

Hydroelectric, water supply, irrigation, and multiple purpose projects; flood and erosion control; river basin development planning; dams and their foundations; tunnels; marine structures; aviation.

28 Booksone Dr., San Anselmo, Calif.

Heron Engineering Co.

Chemical, Mining, Industrial and Hydraulic Plants, Irrigation, Water Supplies, Power and Sewerage Systems, Large Rockfill Dams, Airports, Oil, Gas and Water Pipe Lines.

2080 So. Zenobia, Denver 10, Colorado
Clara, New Mexico

Industrial Drilling and Boring Corp.

FOUNDATION BORINGS
GEOLOGICAL SURVEYS

P. O. Box 1206 1746 E. Adams St.
Jacksonville, Florida

Patchen & Zimmerman

Engineers

Construction Plant, Cofferdams, Structures, Industrial Plants, Dams, Sewerage and Sewage Treatment, Water Supply and Treatment, Supervision, Surveys, Reports.

Daniel Field Airport,
Augusta, Ga.

E. J. Albrecht Company

Engineers—Contractors

Steel, chemical and power plants, dams, flood control projects, railroads, bridges, tunnels, heavy excavation.

2626 West 26th Street, Chicago 8

Alvord, Burdick & Howson

Charles B. Burdick
Louis B. Howson Donald H. Maxwell

Consulting Engineers

Water Works — Sewerage
Water Purification — Sewage Treatment
Flood Relief — Power Generation
Drainage — Appraisals

Room 1401
20 North Wacker Drive, Chicago

Consoer, Townsend & Associates

Water Supply—Sewerage—Flood Control & Drainage—Bridges—Expressways—Highways—Paving—Power Plants, Appraisals—Reports—Traffic Studies—Airports

351 East Ohio St., Chicago 11, Illinois

De Leuw, Cather & Company

CONSULTING ENGINEERS

Transportation Public Transit and Traffic Problems

Industrial Plants — Grade Separations
Railroads — Expressways
Subways — Tunnels
Power Plants — Municipal Works

150 North Wacker Drive
Chicago 6, Ill.

79 McAllister Street
San Francisco 2, Calif.

Greeley and Hansen

Engineers

Water Supply, Water Purification
Sewerage, Sewage Treatment
Flood Control, Drainage, Refuse Disposal

220 S. State Street, Chicago 4

Hazelet & Erdal

Consulting Engineers

Fixed and Movable Bridges — Designs, Supervision
Superhighways — Investigations
Industrial Bldgs. — Reports
Airports — Dams — Surveys

Monadnock Block Chicago 4, Ill.
State Terminal Bldg. Cincinnati 2, O.
Heyburn Bldg. Louisville 2, Ky.

Harza Engineering Co.

Consulting Engineers

L. F. Harza
E. Montford Fucik Calvin V. Davis
Hydro-Electric Power Projects
Transmission Lines, System Management, Dams, Foundations, Harbor Structures, Soil Mechanics

400 W. Madison St. Chicago 6, Ill.

Pioneer Service & Engineering Co.

Consulting and Design Engineers
Operations — Purchasing
Steam — Hydraulic — Gas
Public Utilities — Industrials
231 So. La Salle St. Chicago 4

Sargent & Lundy

ENGINEERS

Steam and Electric Plants
Utilities, Industrials
Studies, Reports, Design
Supervision
Chicago

Interstate Engineering

Consulting Engineers

Design and Supervision of Municipal Improvements
Water Works, Sewage, Drainage, Surveys
Foundation Borings
Rock Island, Illinois

Jenkins, Merchant & Nankivil

Consulting Engineers

Water Systems, Power Development, Flood Control, Airports, Traffic Surveys, Municipal Improvements, Sewerage, Industrial Plants, Recreational Facilities, Investigations and Reports.

805 East Miller St., Springfield, Ill.

Boyd E. Phelps, Inc.

Engineers

Water Supply and Purification
Sewage and Industrial Waste Treatment
Power Generation, Airfields, Reports, Investigations, Appraisals.

622½ Franklin St., Michigan City, Ind.

PROFESSIONAL SERVICES

Cards arranged by states, cities, names — **Additional cards on preceding and following pages**

Chas. W. Cole & Son

Sewerage, Sewage Treatment, Industrial Wastes, Water Supply, Water Treatment, Airports, Industrial Buildings.
Chas. W. Cole, Sr., Chas. W. Cole, Jr.
Ralph J. Barber, M. J. McErlain
Wilbur H. Gartner
220 W. LaSalle, South Bend, Ind.

Stanley Engineering Company, *Consulting Engineers*

Airports — Drainage — Electric Power Flood Control — Industrial — Rate Studies — Sewerage — Valuations — Water Works
Hershey Building, Muscatine, Ia.

G. Douglas Andrews Associates

Engineering Consultants
General Engineering and Consulting Services
Valuations and Management
212 Washington Avenue
Towson, Baltimore 4
Maryland

Saxe, Williar & Robertson

ENGINEERS—CONSULTANTS
Bridges—Structures—Foundations
Industrial Buildings
Baltimore, Maryland — Richmond, Virginia

Whitman, Requardt and Associates

Engineers — Consultants
Civil — Sanitary — Structural
Mechanical — Electrical
Reports, Plans, Supervision, Appraisals
1304 St. Paul Street
Baltimore 2, Maryland

Chas. T. Main, Inc.

Engineers
Design and Supervision of Construction for Industrial Plants
Electrical, Steam and Hydraulic Engineering
Investigations, Reports and Appraisals
Chamber of Commerce Bldg.
80 Federal St., Boston, Mass.

Metcalf & Eddy

ENGINEERS
Investigations — Reports — Design
Supervision of Construction and Operation
Management — Valuation — Laboratory
Statler Building, 111 Sutter St.
Boston 16, San Francisco 4

Philip B. Streander and Affiliates

Consulting Sanitary Engineers
Water Supply—Treatment—Distribution
Sewage—Sewerage—Disposal
Plans—Supervision—Reports
683 Atlantic Ave., Boston 11, Mass.

Chas. F. Dingman

Engineer
Consultant in Construction Cost
Valuation of Physical Assets
Estimates of Cost of Projected Construction or Expansion
Established 1923
Painter, Maine

Black & Veatch

Consulting Engineers
Water — Sewage — Electricity — Industry
Reports, Design, Supervision of Construction, Investigations, Valuation and Rates
4706 Broadway, Kansas City 2, Mo.

Burns & McDonnell Engineering Company

Consulting Engineers — New York Water Works, Light and Power, Sewerage, Reports, Designs, Appraisals, Rate Investigations
Brush Creek Country Club P. O.
9535 N. Troost, Kansas City 2, Mo.

Harrington & Cortelyou

Consulting Engineers
Frank M. Cortelyou
E. M. Newman, F. M. Cortelyou, Jr.
Movable and Fixed Bridges of All Types, Foundations, and Related Structures.
1004 Baltimore — Kansas City 6, Mo.

Russell & Axon

Consulting Engineers
Geo. S. Russell — F. E. Wenger
Jos Williamson, Jr.
Water Works, Sewerage, Sewage Disposal, Industrial and Power Plants, Appraisals
408 Olive Street — Municipal Airport
St. Louis 2, Mo. — Daytona Beach, Fla.

Sverdrup & Parcel

Consulting Engineers
Bridges, Structures and Reports, Industrial and Power Plant Engineering
Syndicate Trust Bldg., St. Louis 1, Mo.

William J. Wenzel

Consulting Engineer
Great Falls, Montana
Developing the Great Northwest

Edwards and Kelcey

ENGINEERS
Surveys — Reports — Economic Studies
Design — Supervision — Transportation
Traffic — Parking — Terminals — Highways — Expressways — Grade Separations — Tunnels — Bridges — Water Supply
210 Market St. (at) — Newark 2, N. J.

Benjamin L. Smith & Associates

Engineers
Investigations — Reports — Designs — Supervision — Valuations
Municipal Engineering and Sanitary Utilities
11 North Pearl St. — Albany 7, N. Y.

F. D. Cooper

Consulting Engineer
Foundations
Design
Investigation
121 Lanesboro Road
DeWitt, New York

E. Lee Heidenreich, Jr.

Consulting Engineer
Quarries — Plant Layout
Crushing Plants — Storage
Tilling Plants — Methods
Concrete Prod. — Design
ucts Plants — Appraisals
67 Second St. — Newburgh, New York

Barker & Wheeler

Water Supply — Utility and Sewerage — Industrial
Sewage Disposal — Valuations
Power Systems — Reports
New York City, 11 Park Place
Albany, N. Y., 36 State St.

Clinton L. Bogert Associates

Consulting Engineers
Water and Sewage Works
Refuse Disposal — Industrial Wastes
Drainage — Flood Control
624 Madison Ave., New York 22, N. Y.

Bowe, Albertson & Associates

Engineers
Water and Sewage Works—Industrial Waste Reuse—Disposal Works—Irrigation Projects—Airfields—Industrial Buildings—Reports, Designs, Estimates, Valuations, Laboratory Service
116 William St., New York 7, N. Y.

Buck, Seifert & Jost

Consulting Engineers
(Formerly Nicholas S. Hill Associates)
Water Supply — Sewage — Hydraulic Developments, Reports and Valuations, Chemical and Biological Laboratories.
New York City, 112 E. 19th St.

L. Coff

Consulting Engineer
Prestressed Concrete
Bridges and Frames
198 Broadway — New York 7, N. Y.

Hugh L. Cooper & Co.

Incorporated
General Hydraulic Engineering
Including the design, financing, construction and management of hydro-electric power plants.
350 Fifth Ave., New York 1, N. Y.

Ebasco Services Inc.

ENGINEERS
CONSTRUCTORS
BUSINESS CONSULTANTS
Design and Construction
Financial and Operating Consultation
Investigations and Reports
Consulting Engineering
Two Rector Street — New York
209 S. LaSalle Street — Chic. 4, Ill.
1604 K Street, N.W. — Wash. 6, D. C.

Fay, Spofford & Thorndike

Engineers
Charles M. Spofford — Ralph W. Horne
John Ayer — William L. Hyland
Elon A. Bowman — Frank L. Lincoln
Carroll A. Farwell — Howard J. Williams
Bridges and Industrial Plants
Water Supply and Sewerage Works
Port and Terminal Works — Airports
Valuations, Investigations, Designs, Supervision of Construction.
11 Beacon St., Boston, Mass.
420 Lexington Ave., N. Y.
(Graybar Bldg.)

Fraser-Brace Engineering Co., Inc.

DESIGN - CONSTRUCTION - REPORTS - APPRAISALS
COMPLETE MANAGEMENT OF PROJECTS
10 East 40th St., New York 16, N. Y.

Hardesty & Hanover

Consulting Engineers
Successors to Waddell & Hardesty
Bridges
Long Spans of All Types
Movable—Lift, Bascule and Swing
Hammer Shew Bascule
Steel and Concrete Spans
Grade Crossing Eliminations
Other Structures
Foundations
Supervision, Reports, Appraisals
101 Park Avenue, New York 17, N. Y.

Frederic R. Harris, Inc.

CONSULTING ENGINEERS
Harbors, Piers & Bulkheads, Dredging, Foundations, Soil Mechanics
Sanitary & Industrial Waste Disposal
Water Supply, Flood Control
Airports, Highways, Bridges
Power, Industrial Plants
27 William Street — New York
Fidelity Phila. Trust Bldg. — Philadelphia
Ferry Bldg. — San Francisco

Howard, Needles, Tammen & Bergendoff

Consulting Engineers
Bridges and Structures
New York, N. Y., 55 Liberty St.
Kansas City, Mo., 921 Walnut St.

Knappen Tippetts Abbett Engineering Co.

Ports, Harbors, Flood Control, Power, Dams, Bridges, Tunnels, Highways, Subways, Airports, Traffic, Foundations, Water Supply, Sewerage, Reports, Design, Supervision, Consultation.
42 West 47th Street, New York City

Lockwood, Kessler & Bartlett, Inc.

ENGINEERS — SURVEYORS
General Engineering Services
Aerial and Ground Surveys
Photogrammetric Mapping
Domestic and Foreign
32 Court St. — Brooklyn 2, N. Y.

Modjeski and Masters

Consulting Engineers
Design, Supervision, Reports, Inspection and Investigations, of Bridges, Structures, and Foundations.
535 Fifth Ave. — State Street Bldg.
New York, N. Y. — Harrisburg, Penna.

Moran, Proctor, Freeman & Mueser

Consulting Engineers
Foundations for Buildings, Bridges and Dams; Tunnels, Bulkheads, Marine Structures, Soil Studies and Tests; Reports, design and supervision.
New York 17, N. Y., 420 Lexington Ave.
PARIS — PROCTOR, FREEMAN & MUESER
Ap. Cortius 614 — Caracas, Venezuela

Parsons, Brinckerhoff, Hall & Macdonald

ENGINEERS
Airports, Bridges, Tunnels, Highways, Traffic and Transportation Reports, Subways, Foundations, Harbor Works, Valuations, Power Developments, Industrial Buildings, Dams, Sewerage, Water Supply.
51 Broadway, New York 6, N. Y.

Malcolm Pirnie Engineers

Civil & Sanitary Engineers
Malcolm Pirnie — Ernest W. Whitlock
Richard Hazen — G. G. Werner, Jr.
Investigations, Reports, Plans, Supervision of Construction and Operations, Appraisals and Rates
25 W. 43rd St., New York 18, N. Y.

When you need a SPECIALIST in a hurry . . .

Engineering News-Record's Professional Service Section offers the quickest, most direct method of contacting consultants who may be available NOW

PROFESSIONAL SERVICES

Cards arranged by states, cities, names — **Additional cards on preceding pages**

The Pitometer Company

Engineers

Water Waste Surveys
Trunk Main Surveys
Water Distribution Studies
Penstock Gaugings

New York, 50 Church St.

Alexander Potter Associates

Consulting Engineers

Water Works, Sewerage, Industrial Wastes, Hydraulic Works, Reports, Designs, Appraisals.

50 Church St., New York, N. Y.

Clyde Potts

Weston Gavett-Stanley N. Williams
Consulting Sanitary Engineers
Sewerage and Sewage Disposal
Water Works and Water Supply
Valuations and Appraisals
30 Church Street, New York 7

Sanderson & Porter

Engineers and Constructors

New York — Chicago
San Francisco — Los Angeles

Scheidenhelm, F. W.

Consulting Engineer

Hydraulic Engineering; Hydro-electric Development; Water Supply; Flood Control; Engineering Problems relating to Water Rights and Water Power Law; Appraisals. 50 Church Street, New York 7, N. Y.

Seelye, Stevenson & Value

Consulting Engineers
Successors to
Edwin E. Seelye & Company
101 Park Avenue
New York 17, N. Y.

Airports, Highways, Dams, Concrete, Steel, Wharves, Fountains, Stadia, Appraisals & Industrial Plants

Edwin E. Seelye, Albert L. Stevenson
Burnside R. Value

H. S. Woodward, Austin M. Rice, Jr., H. Hamilton Pardee, C. M. Thomas, Salisbury, W. De Bailey, J. C. Wiesenberger, A. R. Kelly.

Ole Singstad

Consulting Engineer

TUNNELS

Investigations, Reports, Design, Specifications, Supervision

24 State St., New York 4, N. Y.

Frederick Snare Corporation

Engineers—Contractors

Harbor Works, Bridges, Power Plants, Dams, Docks and Terminals.

Difficult and Unusual Foundations A Specialty.

233 Broadway, New York City 7
1420 South Penn Square, Philadelphia

Havana, Cuba — Lima, Peru
Bogota, Colombia, Caracas, Venezuela
San Juan, Puerto Rico, Guayaquil, Ecuador

D. B. Steinman

Consulting Engineer

Bridges
Design, Construction, Strengthening, Investigations, Reports, Advisory Service.

117 Liberty St., New York 6, N. Y.

Sy-Co Engineers

G. A. Syversen, G. Randolph Syverson
H. Syverson, Consultants
Industrial Plants, Commercial Buildings, Power Plants,
Materials Handling Systems
Estimates, Reports, Design
Supervision
70 Broadway — New York 6, N. Y.

Taylor, Henry W.

Water Supply, Sewerage
Garbage Disposal, Incineration
Industrial Wastes Disposal
Hydraulic Developments

11 Park Place, New York City

The J. G. White Engineering Corporation

Design—Construction
Reports—Appraisals

80 Broad Street, New York 4

James M. Caird

Established 1898

C. E. Clifton, H. A. Bennett
Chemists and Bacteriologist
WATER ANALYSIS
Tests of Filter Plants
Cannon Building, Troy, N. Y.

Keis & Holroyd

Consulting Engineers
Formerly Solomon & Keis
Since 1908
Water Supply, Sewage Disposal, Garbage & Refuse Incineration, Industrial buildings

Troy, N. Y. — Ft. Lauderdale, Fla.

The Austin Company

Design and Construction

Manufacturing and Process Plants
Airports & Air Transport Buildings
Railroad Terminals and Facilities
Power Plants—Industrial & Institutional
Industrial Office Buildings and Laboratories

Reports and Plant Location Surveys

New York — CLEVELAND — Los Angeles
Chicago — Houston — Oakland
Detroit — Seattle

Havens and Emerson

W. L. Havens — C. A. Emerson
A. A. Burger — F. C. Tolles — F. W. Jones
CONSULTING ENGINEERS
Water, Sewage, Garbage, Industrial Wastes, Valuations, Laboratories

Leader Bldg. — Woolworth Bldg.
Cleveland 14 — New York 7

Burgess & Niple

Civil and Sanitary Engineers

Consultants since 1908

Water supply, treatment and distribution. Sewage and industrial wastes disposal. Investigations, reports, appraisals, rates. Plant operation, laboratory, plans and specifications.

584 E. Broad St., Columbus 15, Ohio

Jones, Henry & Schoonmaker

(Formerly Jones & Henry)
Consulting Sanitary Engineers
Water Works, Sewerage & Treatment
Waste Disposal
Security Building — Toledo 4, Ohio

Toledo Testing Laboratory

Engineers—Chemists

Inspection — Tests
Research — Development
Concrete — Asphalt — Soils — Ceramics
Foundation Investigations
Borings — Diamond Drilling
Load Tests

1810 North 12th St., Toledo 2, Ohio

Glancy, Carle & Marseglia

Engineers

Steel & Concrete Structures
Industrial, Commercial Buildings
Design, Supervision, Reports
1506 Market Street, Youngstown, Ohio

Benham Engineering Co.

ENGINEERS

Webster L. Benham
M. Am. Soc. C. E.
Water Supply & Purification, Sewerage, Sewage Disposal, Electric Light & Power, Roads, Drainage
Am. National Bldg., Oklahoma City, Okla.

Capitol Engineering Corporation

Engineers—Constructors—Management

Bridges — Dams
Planning — Airports
Sewage Systems — Water Works
Design and Surveys — Roads & Streets
Executive offices: Dillsburg, Penna.

Brookhart & Tyo, Inc.

Engineers

Highways
Industrial Buildings
Bridges and Structures
Design, Estimates, Reports

1729 N. Front St. — Harrisburg, Pa.

Gannett Fleming Corddry & Carpenter, Inc.

ENGINEERS

Water Works, Sewage, Industrial Wastes & Garbage Disposal — Roads, Airports, Bridges & Flood Control, Town Planning, Appraisals, Investigations & Reports

Scranton Pa. — Pittsburgh, Pa.
Harrisburg, Pa.

Aero Service Corporation

Photogrammetric Engineers

Aerial Topographic Maps
Precise Photo Mosaics
Plastic Relief Models

210 E. Courtland St.
Philadelphia 20, Pa.

Albright & Friel, Inc.

Consulting Engineers

Water, Sewage and Industrial Waste Problems, Supervision of Design, Refuse Incinerators, Power Plants, Industrial Buildings, City Planning, Reports, Valuations, Laboratory

121 So. Broad St., Philadelphia 7, Pa.

Birkinbine Engineering Offices

Consultants since 1922

Water, Sewers, Dams
Bridges and Roads
Surveys, Investigations, Design, Supervision
Commercial Trust Building
Philadelphia 2, Pa.

Day & Zimmermann, Inc.

Engineers

Designs, Construction, Valuations
Reports and Management
Public Utilities and Industrials
Philadelphia
New York Packard Building Chicago

Frederick H. Dechant

Consulting Engineer

Charles C. Myers (Retd.)
Frederick H. Harris Jr.
Water Works, Industrial Waste, Sewerage, Drainage, Flood Protection, Highway Work, Gas Plant
Philadelphia, Federal Title Trust Bldg. — New York, 32 William St.

Fridy - Gauker - Truscott & Fridy

Architects & Engineers

Water, Sewerage, Industrial Waste Investigations, Reports, Design, Supervision
Airport — Building — Town Planning
1721 Arch Street, Philadelphia 7, Pa.

William A. Goff, Inc.

General Engineering and Consulting Services

Water, Sewerage, Refuse Incineration, Industrial Buildings, Power Plants, Airports, Town Planning, Plans, Supervision, Valuations, Reports.
Broad St. Station Bldg., Phila. 3, Pa.

Hunting, Larsen & Dunnells

Engineers

Industrial Plants—Structures
Bridges—Steel and Reinforced Concrete
Design and Supervision—Reports
1250 Century Bldg., Pittsburgh, Pa.

Morris Knowles, Inc.

Engineers

Water Supply and Purification, Sewerage and Sewage Disposal, Valuations, Laboratory, City Planning.
Pittsburgh, Pa.

Gilbert Associates, Inc.

Engineers and Consultants
Design and Supervision of
Steam, Hydro, Water Supply, Sewage Disposal, Diesel Plants and Airports, Valuations, Laboratory

Reading, Pa. — 612 Washington St.
New York — 61 Broadway
Houston — Oil & Gas Building
Washington, D. C. — 1417 K St., N. W.

Michael Baker, Jr., Inc.

THE BAKER ENGINEERS
CIVIL ENGINEERS, PLANNERS, AND SURVEYORS
MUNICIPAL ENGINEERS
Airport Design—Sewage Disposal Systems—Water Works Design and Operation—Cons. Sur.—Surveys & Maps.

Rochester, Pa. — Jackson, Miss.

Lacy, Atherton & Davis

Architects and Engineers

Hotel Sterling Building
Wilkes Barre, Pa.

Myers & Noyes & Associates

Consulting Engineers
Water Supply, Sewage, Flood Control, Storm Protection, Irrigation and Reclamation, Reports and Valuations
2204 Tower Petroleum Bldg., Dallas, Texas
320 Wilson Building
Corpus Christi, Texas

Lockwood & Andrews

Consulting Engineers

Airports, Paving, Industrial Plants, Drainage & Sewerage, Site Locations, Soils & Foundations, Water Supply, Structures, Harbor Works, Valuations, Reports—Design—Supervision

Union Nat'l Bank Bldg., Houston, Tex.

Engineering Services

S. B. Applin, M.ASCE, A.M. Assoc. M.I.E.M.
Reports, Investigations
Water Supply & Distribution
Municipal Engineering
Materials Testing
Continental Bk. Bldg., Salt Lake City

Hutchings & Milani, Ltd.

Engineers & Constructors

Industrial Roads — Power Plants
Docks — Terminals — Harbor Works
Foundations — Hotels

CARIBBEAN — WEST INDIES — SOUTH AMERICA
BERMUDA CUBAN
CONSULTANTS, LTD.
Architects & Engineers

Design, Reports, Investigations

L. C. Milani, ASCE, C. W. Adams, M.I.B.A., N. Z., Assoc. A.I.A., P. Geier, A.T. Lee, C. J. Wilde, S. H. Pace, W. Weir

BOTH HEAD OFFICES AT HAMILTON, BERMUDA

Inspecting and Testing

Robert W. Hunt Co.

Inspecting and Testing Engineers

Inspection and Tests of Materials
Supervision of Construction for Utility Plants, Buildings, Bridges, Machinery and Equipment

General Offices and Laboratories
175 West Jackson Boulevard, Chicago
New York — Pittsburgh — St. Louis

The Haller Testing Laboratories, Inc.

Testing and Inspecting of Construction Materials

101 2nd Avenue, New York 17, N. Y.
New Brunswick, N. J. — Easton, Pa.
New Haven, Conn. — Plainfield, N. J.

NEW PRODUCTS

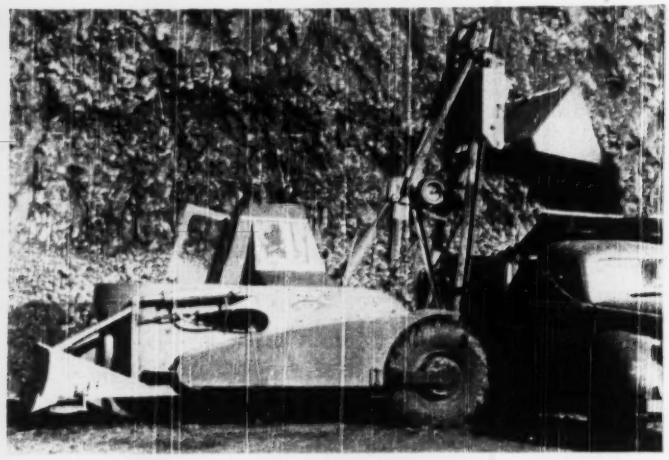

Wagnermobile Duo-Way Scoop Has Hydraulic Track and Dozer Blade

Full hydraulic controls in Wagnermobile Duo-Way Scoop permit fast and smooth action. The Duo-Way performs as a loader, dozer, truck, and tractor. It has an 84-in. dozer blade at one end, and a 1-yd scoop at the other. Side-saddle seating arrangement provides unobstructed visibility for operations at either end. Powered by a 114-hp engine, it has four speeds in either direction, and highway speeds to 20 mph. Tilt control mechanism tilts 10 deg. back or forward. Top section folds down to 9 ft 6 in. for low road clearance.—Mixermobile Manufacturers, Portland 20, Ore.

Heavy-Duty Lift Trucks

New series of heavy-duty Lattruks, is available in three capacities—5, 7½, and 10 tons. Dual pneumatic traction tires are mounted on a dead axle that supports the chassis and fork load, relieving the differential drive from this service. Lifting guides are interlocked to provide good alignment and equal distribution of fork loads. Attachments available include shovels, special forks and fork extensions, power spreaders, rotary tongs for forks, and special winches and crane booms.—Silent Hoist & Crane Co., 841 63rd St., Brooklyn 20, N. Y.



Airborne Surveyor's Target

Balloon combined with kite provides a means for lifting and suspending surveyors' targets at heights to 2,000 ft. This facilitates surveying operations in mountainous terrain and other areas obscured by forests or man-made structures. In aerial mapping, the Kytoon can be used to establish horizontal-control points on the ground. Results with the Kytoon have been found to be accurate and acceptable for third-order work. The balloon is filled with helium or hydrogen.—Dewey & Almy Chemical Co., Cambridge, Mass.

Steel Window Well

Fully corrugated galvanized-steel window well has a flat, crimped, safety-top edge. The USF standard well is produced in only one opening width, but in three standard depths. Dimensions of the Standard well's are: 37x16 in., in a choice of 12, 18, and 24-in depths.—United Steel Fabricators, Inc., Wooster, Ohio.

Reversible Rooter Points

Forged rooter point fits all small trenchers. The Model 51 point is 42-in. long and has a Rockwell C 48/51 hardness. The point resembles a cape chisel with heavy ribs on each side, providing a strong, shallow cutting face.—Jiffy Products Co., Inc., 3611 Parry Ave., Dallas, Tex.



Small Model Gravelmaster

Junior B is the smallest unit in the 880 Gravelmaster series of crushing, screening, and loading plants. Overall height has been lowered and screening area increased with a 2x8-ft, 2-deck screen. Provision is made for removal of chips. A 10x16-in. roller-bearing jaw crusher and an 18x16-in. star-gear roll crusher is used in the Junior B. Power is mounted on the plant. Plant may be fed by shovel-loading hopper, or by a swivel feed conveyor. The Junior B meets road limitations.—Universal Engineering Corp., Div. Pettibone Mulliken Corp., Cedar Rapids, Iowa.



Elevating Tailgate

Hydraulically controlled elevating tailgate is operated by a single lever. Hydrogate lowers to within a few in-

(Continued on page 86)

Pachyderm of trailers protected by Monsanto PENTA CHLOROPHENOL preservative

(Santophen 20)

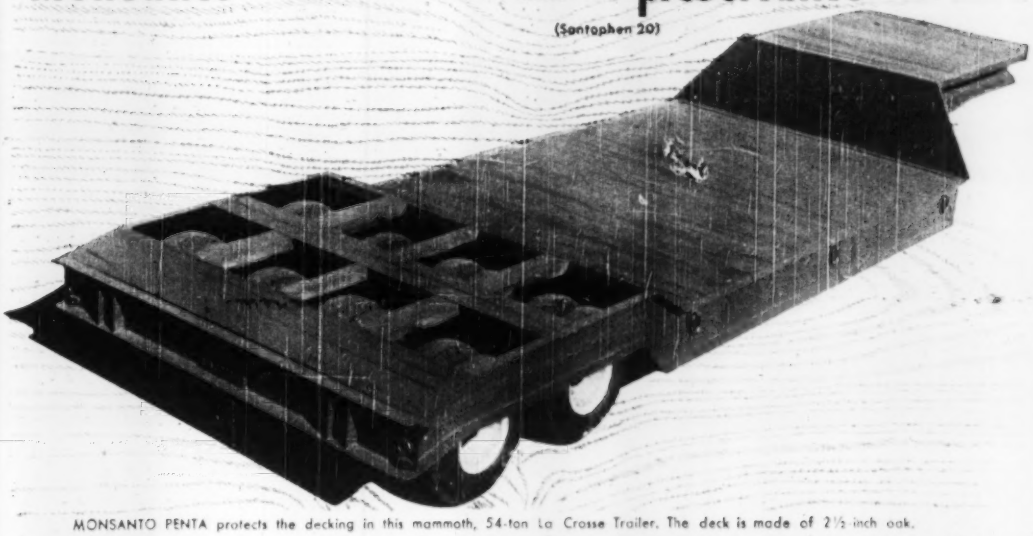

MONSANTO PENTA protects the decking in this mammoth, 54-ton La Crosse Trailer. The deck is made of 2½ inch oak.

A formulation of Monsanto Penta adds to the life of the decking of the 54-ton La Crosse Trailer by increasing its ability to withstand wood rot and by guarding it against damage by insects and fungi.

Monsanto Penta can be formulated to give *clean* treatment, even making treated wood paintable. Penta stays in the wood through blistering sun. And, since penta is virtually insoluble in water, the treatment withstands exposure to rain and snow. Monsanto Penta is positive protection against termites and other wood-boring insects . . . against fungi which cause wood to rot.

Penta, which may be applied by pressure, dip or brush methods, is used to protect all types of wooden construction, from bridge timbers to fence posts . . . from barn sills to millwork for fine homes.

If you wish further information about protecting wood with Monsanto Penta, mail the coupon or contact the nearest Monsanto Sales Office. MONSANTO CHEMICAL COMPANY, Organic Chemicals Division, 1759-F South Second Street, St. Louis 4, Missouri.

DISTRICT SALES OFFICES: Birmingham, Boston, Charlotte, Chicago, Cincinnati, Cleveland, Detroit, Houston, Los Angeles, New York, Philadelphia, Portland, Ore., San Francisco, Seattle. In Canada, Monsanto Canada Ltd., Montreal.

MONSANTO
CHEMICALS for PLASTICS

MONSANTO CHEMICAL COMPANY
Organic Chemicals Division
1759-F South Second Street, St. Louis 4, Missouri
Please send information on the use of Monsanto Penta to protect wood used for .....
.....
.....
Name ..... *Title* .....
Company .....
Street .....
City ..... *Zone* ..... *State* .....

SERVING INDUSTRY . . . WHICH SERVES MANKIND

LOOK

TO LIDDICOAT

Pioneer in the Field of Single Use Bits

for:

More feet per drill-shift!
Less cost per foot drilled!
Sizes, types to meet all conditions!
Immediate delivery!

Complete field service and research facilities available. LIDDICOAT and only LIDDICOAT combines all features essential to maximum drilling at the lowest possible cost.

Full information on request.

WESTERN ROCK BIT MANUFACTURING COMPANY

CALUMET & HECLA CONSOLIDATED COPPER COMPANY

Manufactured for sale in 11 western states the Philippines and Alaska by Western Rock Bit Mfg. Co., 552 W. 7th So., Salt Lake City

Manufactured for sale in the 37 eastern states by Calumet & Hecla Consolidated Copper Co. of Calumet, Michigan, U. S. A.

"Gunite" ..... the sand-cement product of the "CEMENT GUN," for Concrete and Masonry Repairs, Pre-Stressed Tanks, Steel Encasement and for lining Reservoirs, Sewers and Tunnels.

CEMENT GUN COMPANY
"GUNITE" CONTRACTORS
GENERAL OFFICES—ALLENTOWN, PENNA., U.S.A.
MANUFACTURERS OF THE "CEMENT GUN"

ches of the ground, and stops or holds at any height desired. Marion safety features prevent tailgate from dropping accidentally. Rated lifting capacity is 2,000 lb. Unit fits all new and old model trucks.—Marion Metal Products Co., Marion, Ohio.

Hopper-Car Unloader

Belt-type unloader conveys stone, sand, and gravel from hopper cars onto a portable belt conveyor for stockpiling or transfer to trucks. Adjustable gate at forward end of chute controls height of flow. Rubber strip along each side prevents materials from leaking into the chain or other wearing parts. Pneumatic tires or steel wheels are available, as are gasoline or electric power units.—Leidmann Engineering Works, 4603 W. Mitchell St., Milwaukee 14, Wis.

Hydraulic Jacks

Complete line of hydraulic jacks covers a size range from 1½ to 100 tons. All models can be used in vertical or horizontal position. Jack handles must be removed from pump socket in order to open release valve. Bases are ribbed to obtain firm ground bearing.—Star Jack Co., Inc., Elmwood Park, Chicago 35, Ill.

Precision Plotting Table

Rapid plotting and measuring of points on plane surfaces in terms of rectangular coordinates are simplified by this precision plotting table. Standard units have a 4×6-ft working surface and are based on decimal-inch measurements. Other table sizes, as well as metric division, can be supplied in special designs. The X and Y carriages are position to nearest inch by notches spaced to an accuracy of better than 0.0002 in. Even-inch notches are subdivided by means of short lead screws which provide only 1 in. of travel. Lead screws thus have a negli-

gible accumulated error. Large scale movements are made by disengaging latch. Intermediate adjustments to 0.001 in. are made by two hand cranks. —The Fairchild Camera & Instrument Corp., West Coast Division, 53 W. Union St., Pasadena 1, Calif.

Power Saw and File

Metals, wood, plastics, and other materials up to the size of a 36-in. I-beam can be quickly cut by the Mid-States Saw Gun. Power is provided by electric drill, air drill, or through a flexible shaft. The Saw Gun handles standard types of hack-saw blades and files. Units are supplied with or without drills, and in models to connect with various size drill chucks or flexible shafts. — Mid-States Welder Mfg. Co., 6025 S. Ashland Ave., Chicago 36, Ill.

Fuel-Pump Calibrating Stand

Repairs and adjustments of diesel-fuel injection pumps are speeded by the Model AP 5200 calibrating stand. Adjustable to all makes of pumps, the stand is a self-contained unit for calibrating, testing, and adjusting fuel pumps. — Automotive Products, Inc., 1700 S. E. Grand Ave., Portland 14, Ore.

Side-Dump Truck Body

Hydraulic dumping and fully automatic down-folding side gate are features of the new Easton side-dump truck body. Operation of gate is controlled by leverage system with door-operating mechanism completely enclosed for protection against falling stones. Gate opens flush with floor as body is raised, closes automatically as body is lowered. When open, gate provides a chute that carries load clear of tires. Three-sleeve telescopic hydraulic jacks, one at each end of body, are used for dumping. The Model

(Continued on next page)

566-ft. bridge across Smith River in Douglas County, Oregon. Truss section fabricated by Timber Structures, Inc.

Here is a bridge that does two big jobs...

1. **It provides a lifetime of safe, trouble free service.**
2. **It shows how communities may acquire at genuinely low costs permanent, serviceable bridges that would be prohibitively costly if built of any other type of construction. Here are the facts:**

Bridge is 566 feet long overall, with truss section of 183 feet. It is designed for H-20 loading, and has portal clearance of 15 feet. Trusses are of Timber Structures glued laminated design, fabricated of Douglas fir timber, preservative treated and joined to other bridge members with split ring connectors. Clear width of roadway is 20 feet, with wearing surface of asphalt bituminous supported by 2x10 laminations. Total cost of the bridge, including concrete piers, was approximately $150,000.

This is only one of several types of bridges fabricated by Timber Structures, Inc. Other types include arch, pony and composite deck bridges. Timbers may be given any desired preservative treatment to protect them against attack by decay or termites.

If you have a problem in making your bridge dollars go farther, you are invited to consult with Timber Structures, Inc. See the representative nearest you, or write us details of your problem. A brochure on the new composite deck bridge is yours for the asking. Just fill in and mail the coupon.

TIMBER STRUCTURES, INC.

P. O. BOX 3782-C, PORTLAND 8, OREGON

Offices in Boise, Idaho, Eugene, Oregon, Kansas City, Missouri, Jeffersonville, N. J., Chicago, Dallas, New York, Seattle, Spokane

TIMBER STRUCTURES, INC., of California • Oakland, Sacramento, Santa Rosa

TIMBER STRUCTURES OF CANADA, LTD. • Peterborough, Ontario

(Small Representatives Coast to Coast)

TIMBER STRUCTURES, INC.
P. O. Box 3782-C, Portland 8, Oregon.
Please send Composite Deck Bridge brochure to

Name_____

Company_____

Address_____

City_____ Zone____ State_____

300% Overload Rating on Clutch —Typical Airmaster long-life feature

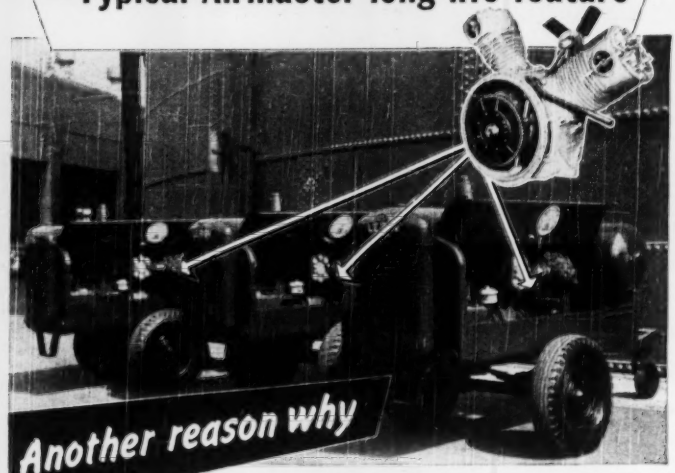

Le Roi Airmaster Compressors produce more air for less money

WHEN you buy a Le Roi Compressor, the pay off is in *extra* service hours. Le Roi's can take it. For example, the 300% overload rating on the clutch provides protection against on-the-job failure.

You find other extra margins of safety — extra sturdy running gear, solid protective housing, heavy-duty engine-compressor units — that show up in *extra* service hours.

Be sure to use a compressor that won't let you down—that produces more air for less money. Sizes from 60 to 600 Cfm. Ask your distributor for more about Le Roi's "long-life" design or write us for bulletins that tell the story.

— and Le-Roi-Cleveland air tools cut costs still more

Experienced distributors everywhere to give prompt service on the job! C-124

LE ROI COMPANY

MILWAUKEE 14, WISCONSIN

NEW YORK • WASHINGTON • CLEVELAND • BIRMINGHAM • TULSA • BUTTE • SAN FRANCISCO

BD-1116H (shown in illustration) has a capacity of 16 tons. The same design is available in larger capacities.—EASTON CAR & CONSTRUCTION CO., EASTON, PA.

Portable Road Beacon

Short-duration flashes are produced at a rate of 70 per min by a new, portable road beacon. The beacon consists of a special gas-discharge lamp, simplified pulse-producing unit, four 1.5-v dry-cell batteries, and lens. Lens drum of pressed glass protects lamp and provides increased light in horizontal direction. Beacon stands 22 in. tall, has an 8-in. dia, and weighs 29 lb.—INTERNATIONAL STANDARD TRADING CORP., 67 BROAD ST., NEW YORK 4, N. Y.



Concrete-Block Lift Truck

Prongs of the No. 533 lift truck are spaced to handle two 16-in. stretcher courses. Especially designed for handling concrete blocks, this 3-prong truck is completely automatic. Stretcher course is held in place by grippers which are forced against the blocks by the weight of the load.—SCHMIDGALL MFG. CO., PEORIA, ILL.

Diesel-Engine Crankcase Oil

Improved crankcase oil for diesel and gasoline engines combats formation of sludge and engine deposits under severe operating conditions. Advantages claimed are: Prevents ring sticking, valve and rocker arm deposits,

(Continued on page 90)



Two of several wool bins in the Hardwick and Magee Spinning Mill—built with K&M APAC.

ON GUARD: K&M "Century" APAC

When raw wool or processed wool is stored in bulk, there's danger of fire—not only from external causes, but also from spontaneous combustion. That's one of the reasons the Hardwick and Magee Company, nationally known carpet and rug manufacturers, chose K&M APAC for the construction of these wool bins in their modern spinning mill.

K&M APAC—specially processed sheets of asbestos-cement—resists fire effectively and dependably. The smooth, hard finish of APAC prevents fibrous matter and dust from adhering to the surface—reduces materially the opportunity for fire to spread. And K&M APAC stops the other enemies of raw materials, also—weather, rust, rot, termites, and rodents can't affect it.

You'll like the installation economies you get from using K&M APAC, too. Sheet sections are large (4' x 8') and strong, but not bulky; they handle easily, can be cut and fitted on the job, are quickly erected. And you save on maintenance costs, too, for K&M APAC doesn't need even paint to preserve its attractive finish.

It will pay you to consider K&M APAC Asbestos-Cement Sheets for such needs as panels, partitions, sheathing, shaft casings, bins, in fact, for all flat surfaces both interior and exterior. APAC can be applied over insulation boards, wood studs, solid wood sheathing, steel or wood girts. It's adaptable and economical—the perfect answer to flat surface covering problems.

GET THE COMPLETE STORY—write us for details and the name of your nearest distributor. There's no obligation, of course.

Nature made Asbestos . . . Keasbey & Mattison has made it serve mankind since 1873

KEASBEY & MATTISON
COMPANY • AMBLER • PENNSYLVANIA

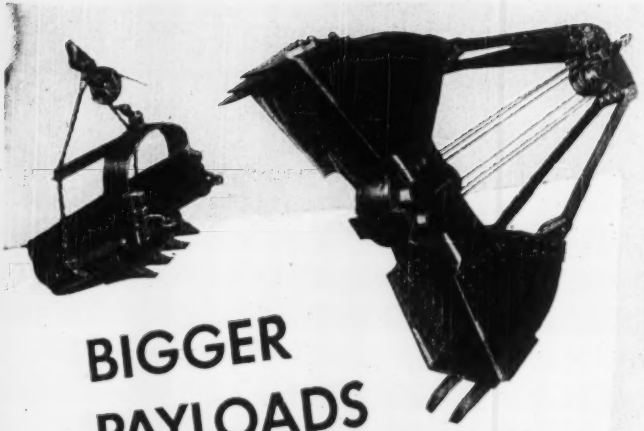

BIGGER PAYLOADS *with* **WELLMAN**

Williams Type **BUCKETS**

• Exclusive features in design and construction make payloads bigger...at lower cost! Weight is balanced, not cumbersome. Extra strength is built into every part with the sturdy **welded rolled steel construction** pioneered by Wellman, the leader for over fifty years. A type for every service!

THE WELLMAN ENGINEERING COMPANY

7000 CENTRAL AVENUE • CLEVELAND 4, OHIO

SEND FOR BULLETIN

"Gunite" Florida Service, Inc.

air applied concrete specialists

1061 Ponce de Leon Blvd. Coral Gables, Fla

- Repair all types Disintegrated Concrete
- Dam Reconstruction and repairs.
- Linings and repairs for Reservoirs, Stacks, Bunkers, Sewers, Tanks, Tunnels, Pen Stocks
- Structural Steel Encasements
- Restoration of Masonry Structures

All work under the supervision of Harvey M. and Victor S. Anderson, using the latest equipment.

Work executed anywhere in the U. S. A. and Latin America

Write for our new illustrated brochure!

PHOENIX BRIDGE COMPANY

Engineers—Fabricators

Erectors

Structural Steel

BRIDGES and BUILDINGS

General Office and Shops

PHOENIXVILLE, PA.

Subsidiary—Barium Steel Corporation

and excessive liner wear when high-sulphur fuels are used; prevents cold engine sludge in stop-and-go operations; and prevents rust and moisture corrosion in engines that are idle or in storage.—D-A Lubricant Co., Inc., Indianapolis, Ind.

Hand-Size Hydraulic Cutter

Small-size hydraulic cutter handles reinforcing rod, stainless steel, and Monel rod of ¼-in. dia, mild-steel rod of ½-in. dia, ½-in. soft chain, and ¾-in. hard chain. Cutting unit of the Manco Guillotine Model 20D has an open C-frame anvil that will accommodate hex-shaped and square material. Air-hydraulic pump operates on compressed air supplying 100-lb. pressure.—Manco Mfg. Co., Bradley, Ill.

Lightweight Power Saw

Three-inch capacity saw rips, cross-cuts, and angle cuts rough or finished lumber. Weighing 12 lb, either right or left-hand blade is available. Bevel-depth attachment permits straight cuts from ¼ to 2⅜ in., and up to 45-deg bevel cuts from ¼ to 1⅝ in. Attachments are available for grooving mortar joints, cutting plastics and metal, and for mortising, cutting, or scoring compositions, tile, stone, and concrete. Both 115 and 230-volt ac/dc models are available.—Skil Tool Co., Power Tool Div., 2750 S. Chicago Ave., Chicago 19, Ill.

New Product Briefs

Air-conditioning compressors meet application needs from 100 to 150 hp in single units, and are designed to operate with a variety of refrigerants. The Model 5J40 is a 4-cyl machine; the 5J60, a 6-cyl unit. Maker: Carrier Corp., Syracuse, N. Y.

Spray gun has controllable nozzle producing pattern from size of a silver dollar to a swath 12 in. wide. Maker: Eclipse Air Brush Co., Newark 7, N. J.

Corrosion and oxidation-resistant coating can be used on concrete, wood, or fiber surfaces. End-O-Rust, (End-O-Rust, Inc., Cleveland, Ohio) has a high, hard gloss finish, impervious to abrasion, weathering, and hard wear.

Electric-hydraulic door opener handles heavy doors with a feather-like touch. The Pittcomatic is essentially a double-acting automatic power hinge. Microswitch is actuated the moment the door handle is touched. Maker: Pittsburgh Plate Glass Co., Pittsburgh 22, Pa.

Pax-all refuse collector, formerly manufactured by Woodson Products of Detroit, has been acquired by the St. Paul Division of Gar Wood Industries, Inc.

Headrest goggle for welders is easily adjustable to any head size. Designed to be worn over eyes or personal glasses, the goggles have well-ventilated indirect side shields to keep out sparks, metal splashes, and stray light rays. Maker: American Optical Co., Southbridge, Mass.

Light-directing glass block transmits more daylight under conditions usually considered adverse. Insulux 563 is described as a light-directing azimuth-correcting block that directs a major portion of daylight toward ceiling areas. Maker: American Structural Products Co., Toledo 1, Ohio.

Gear-type bender features full 180-deg bends and positioning at any point on the tubing, without disassembly. The benders (Imperial Brass Mfg. Co., Chicago 7, Ill.) are designed for use with copper, brass, aluminum, or steel tubing in sizes from ¼ to 1¼ in. outside dia.

Magnetic sweeper attracts ferrous materials on a magnetic tube which rotates through a full 360 deg. Material collects over the entire circumference to a thickness of about 2 in. Available in sizes ranging from 12 to 36 in. Maker: Eriez Mfg. Co., Erie, Pa.

HELTZEL

Heltzel BUILDS IT BETTER

SUPERIOR ROAD & AIRPORT Forms

Compare Heltzel forms with any other. Point for point Heltzel forms are outstanding in construction features and on-the-job advantages. Like all good equipment, they afford economies in working time while assuring a better job.

- HEAVY DUTY ROAD FORMS
- MILITARY HIGHWAY FORMS
- DUAL DUTY AIRPORT-HIGHWAY FORMS
- ISLAND AND CATCH BASIN FORMS
- ROAD FORM ATTACHMENTS

FIVE RIGID SUPPORTS—3 welded stake pockets, 2 lock joints.
UPTURNED FLANGE—50% additional strength.
EXCLUSIVE STAKE POCKET—Wider, welded sure-grip wedging
TOUGHER STAKE—Rerolled rail material—hot forged points.
WIDE THREAD—2½" for greater traction, rigidity and strength
LOCK JOINT—Hot pressed ¼" plate, longer driving ears
Heltzel BUILDS IT BETTER

TEST PROVEN — State highway tests show Heltzel builds better forms. Average results prove Heltzel 20% better.

JOB PROVEN — Veteran Heltzel forms can be seen on many jobs — they last longer. They don't wiggle and weave under pressure and movement of heavy equipment — they stake firmly and carry the load.

HELTZEL DUAL DUTY FORMS

Each dual duty form can be used to make two thicknesses of concrete slabs. Illustration above shows same form in upright position for 24" slab and side position for 20" slab. Sizes from 8" up.

Get details WRITE FOR BULLETIN

HELTZEL STEEL FORM & IRON CO.
WARREN, OHIO, U. S. A.
Please send information regarding:
Road and Airport Forms
Curb and Gutter Forms
Batching Plants and Bins
Name
Address
City State

HELTZEL STEEL FORM & IRON CO. WARREN, OHIO · U. S. A.

RIGHT FOR ROAD BUILDING

The Kinney Bituminous Distributor is an invaluable member of the road crew. With its famous Kinney Rotating Plunger Pump, this distributor delivers bitumen *accurately* as specified and you can always count on it to keep the job rolling smoothly. Grouped, rear-platform controls are specially designed for easy, positive action. Handwheel gives lateral adjustment of spray bar for matching bituminous strips. Fraco hot circulating spray bar can be furnished, as alternate, when desired. Write for Bulletin A-49. Kinney Manufacturing Co., 3527 Washington St., Boston 30, Mass. Representatives in New York, Chicago, Cleveland, Philadelphia, Los Angeles.



KINNEY Bituminous DISTRIBUTORS

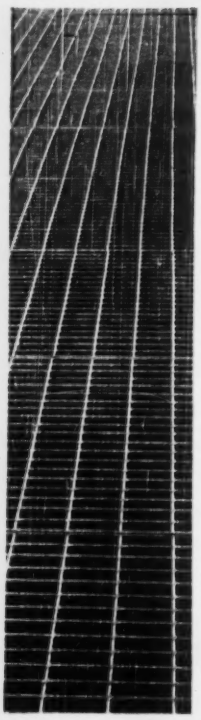

get the grating with all these features—

1. Maximum ventilation and light.
2. Minimum cleaning and painting surface.
3. Always safe, non-skid footing.
4. Rugged durability and long-life rigidity.
5. Completely fire-proof.
6. Quick, easy to install.

GET KLEMP Open Steel GRATING

Planning close quarters? . . . KLEMP will fabricate Grating to fit any location, exactly to your special requirements. Welded or riveted.

Write Today for Detailed Catalog

Also ask about KLEMP Steel Safety Mats, Floor steel, Flexible Floor Armor that rolls out like a rug and Hexsteel Heavy Duty Surface Armor.

P.S. Our deliveries are excellent now!

KLEMP DIAMOND RIVETED GRATING

WM. F. KLEMP CO.

"Steel Flooring Specialists"

6608 S. Melvina St., Chicago 38, Ill.



Manufacturers' Publications

Street Sweeper—Features of the improved Elgin SI street sweeper are listed and described in this folder. These features include the five forward speed transmission, 3-yd Hippo-Hopper, 3-wheel design, 7½-ft sweeping width, and gutter vision controls. Photographs and text describe operation of the Elgin SI, and a table of specifications list information on principal component parts.—The Elgin Corp., 501 Fifth Ave., New York 17, N. Y.

Elevated Water Tank—The Watersphere streamlined, elevated water tank is described in this 8-pager. The pamphlet describes construction of the Watersphere, supports, location of accessories, and other features of construction and operation. The pamphlet contains illustrations of typical installations from 25,000 to 150,000-gal capacity. Standard sizes are available with capacities to 250,000 gal.—Chicago Bridge & Iron Co., 332 S. Michigan Ave., Chicago 4, Ill.

Compressed Air—Basic reference data on compressed air is contained in this 18-p booklet. Designed as a general non-technical review of compressed-air theory, it outlines how air is compressed, machines employed in compressing air, and basic principles of utilization of air power.—Compressed Air & Gas Institute, 1410 Terminal Tower, Cleveland 13, Ohio.

Calgon—Folder describes and illustrates threshold treatment for protecting water systems against general corrosive attack, eliminate red water, and control corrosion of hot water systems and industrial cooling systems. The folder points out that Calgon forms a film over metal surfaces of the water system, which acts as a protective coating.—Calgon, Inc., Hagan Bldg., Pittsburg 30, Pa.

Metal Drainage Structures—Three new bulletins released by Armco describe various types of metal drainage structures. One bulletin, 24 pp in length, describes the primary advantages of perforated pipe and gives recommended installations methods. It also describes the advantages of controlling ground water. The second bulletin describes Armco end sections designed to provide increased culvert efficiency, to match modern road de-

sign; and to provide simple, speedy installation. The third bulletin describes strength advantages of Armco metal drainage structures. A listing outlines types suitable for various installations and kinds of service. — ARMCO DRAINAGE & METAL PRODUCTS, INC., MIDDLETOWN, OHIO.

Air Distribution Outlets—Ceiling air-distribution outlets are described in Catalog E-4085. The catalog contains complete dimension and capacity information for each type of Venturiflo outlet. — BARBER-COLMAN CO., ROCKFORD, ILL.

Sectional-Truss Belt Conveyor—Selection and layout information of sectional-truss belt conveyors is interestingly presented in a new 40-p catalog. The Redi-Fab series described is available in 40 lengths, 3 widths, and with numerous other variables and accessories. A feature of the catalog is a layout sheet which, coupled with the engineering data presented, permits the reader to make his own layout right down to the location and selection of supports. — BARBER-GREENE CO., AURORA, ILL.

Full-Track Trench Excavator—Specifications and operating advantages of the Badger Model 303-3 full-track trench excavator are listed in a 4-p folder. Among the features described in detail are the patented Badger shovel and cleaners, the arc-type reversible cross conveyor, deeper digging range and grade holder and sight. Photographs show recommended applications.—BADGER MACHINE CO., WINONA, MINN.

Welding Materials—Two catalogs now available contain detailed information on a line of welding electrodes and accessories. One bulletin (16 pp) contains two pages of data on each of seven Murex mild-steel arc-welding electrodes. The other bulletin (32 pp) describes the M&T line of arc welding accessories which includes holders, helmets, cable, ground clamps, goggles, cleaning tools, and protective clothing.—METAL & THERMIT CORP., 110 E. 42ND ST., NEW YORK 17, N. Y.

Water Clarifiers, Softeners—Bulletin describes the Graver water clarifiers and cold-process softeners. Feature of the bulletin is a graphic description of design, operation, and features of the Graver reactivator. Explanations in tabular form provide greater clarity. Introductory sections explain principles and chemistry of cold-process water treatment.—GRAVER WATER CONDITIONING CO., DEPT. 163, 216 W. 14TH ST., NEW YORK 11, N. Y.

ADVERTISERS IN THIS ISSUE

Albert Pipe Supply Co. ... 66
American Mutual Liability Insurance Co. ... 10, 11
Armco Drainage & Metal Products, Inc. ... 16

Bethlehem Steel Co. ... 56
Borden Metal Products ... 69

Calumet Hecla Consolidated Copper Co. ... 86
Cast Iron Pipe Research Assoc., Inc. ... 14, 15
Caterpillar Tractor Co. ... 8, 9
Cement Gun Company ... 86
Century Geophysical Corp. ... 57
Chicago Bridge & Iron Co. ... 2nd cover
Cleaver Brooks Company ... 55
Cleco Div., Reed Roller Bit Co. ... 66
Clyde Iron Works, Inc. ... 3
Concrete Surfacing Machinery Co. ... 60
Consolidated Concrete Forms Corp. ... 71

David House Moving Co., E. F. ... 69

Euclid Road Machinery Co. ... 7

Federal Motor Truck Co. ... Insert 41, 42
Flintkote Co., The ... 13

Gar Wood Industries, Inc. ... Insert 48, 49
Gunite Concrete & Construction Co. ... 63
Gunite Florida Service, Inc. ... 90

Hayward Company ... 60
Heltzel Steel Form & Iron Company ... 91
Hyatt Bearings Div., General Motors Corp. 50

Indiana Gunite & Construction Co., Inc. ... 69
Irving Subway Grating Co. ... 45

Keasbey & Mattison Co. ... 89
Kinney Mfg. Co. ... 92
Klemp Co., Wm., F. ... 92

LaPlant Choate Mfg. Co. ... 1
LeRoi Co. ... 88
LeTourneau, Inc., R. G. ... 94, 95
Leupold & Stevens Instruments, Inc. ... 2
Lincoln Electric Co. ... 18

MacArthur Concrete Pile Corp. ... 58
Martin Machine Company ... 65
McKiernan-Terry Co. ... 60
Monsanto Chemical Co. ... 85
Murphy Diesel Corp. ... 5

Nelson Stud Welding Div. Morton Gregory Corp. ... 59

Owen Bucket Company ... 6

Phoenix Bridge Company ... 90

Raymond Concrete Pile Corp. ... 3rd cover
Rogers Bros. Corp. ... 12

Schramm, Inc. ... 20
Sprague & Henwood, Inc. ... 63
Stefco Steel Co. ... 63
Stemco Corp. ... 54

Timber Structures, Inc. ... 87
Timken Roller Bearing Co. ... 4th cover

Universal Form Clamp Co. ... 47
Universal Manufacturing Co. ... 4

Wellman Engineering Co. ... 90
Western Rock Bit Mfg. Co. ... 86
Wills Motor Center ... 45

Yeomans Brothers Co. ... 53

PROFESSIONAL SERVICES ... 81-82, 83

SEARCHLIGHT SECTION

(Classified Advertising)

Employment
Positions Vacant ... 76
Civil Service ... 76
Positions Wanted ... 76
Part Time Work ... 76
Selling Opportunities Wanted ... 76

Special Services ... 76

Business Opportunities
Offered ... 76

Equipment
(Used or Surplus New)
For Sale ... 77-81
Piling ... 81
Pipe ... 78
Rail ... 81
Surveying Instruments ... 76

Wanted
Equipment ... 80

ENGINEERING NEWS-RECORD

HOWARD ORDEN Business Manager

Sales Representatives—Fred G. Hudson, L. H. Hunt and H. L. Keeler, 520 N. Michigan Ave., Chicago 11; Ralph Dorland, 68 Post Street, San Francisco 4; D. S. Robertson and W. G. Payne, 330 W. 42nd St., New York 18; A. B. Gozzens, 17th and Sansome Sts., Philadelphia 3; F. E. Duff, Jr., Hanna Bldg., Cleveland 15; R. F. Horn, Penobscot Bldg., Detroit 26; W. E. Donnell, Continental Bldg., St. Louis 8; C. E. McReynolds, 1111 Wilshire Blvd., Los Angeles 17; Ralph Maulsby, Rhodes-Haverty Bldg., Atlanta 3; J. H. Allen, First National Bank Bldg., Dallas 1. Other sales offices—7-8 39 Oliver Bldg., Pittsburgh 22; Architect Bldg., Boston 16; Aldwych House, London, England.

3 TOURNAROCKERS "very satisfactory on Pine Canyon project"

Tournapull, Carryall—Trademarks Reg. U.S. Pat. Off. Tournarocker—Trademark ©1964

Mail today to: R. G. LeTOURNEAU, Inc., Peoria, Illinois

NAME _____ TITLE _____

COMPANY _____

STREET _____

CITY _____ STATE _____

Type work _____

- ☐ Send us more information
- ☐ Have Distributor call about: 35 m.p.h., 16-ton Tournarocker

Also interested in:

- ☐ 25 m.p.h., 9-ton Tournarocker
- ☐ 30 m.p.h., 35-ton Tournarocker

GOODFELLOW Brothers, Inc.,

tackled one of the northwest's toughest highway jobs . . . relocating 4.4 miles of U. S. 2 along steep sidewalls of rocky Pine Canyon, near Wenatchee, Washington. With over 600,000 yards of shovel rock to be carved out of the cliff face, some of the material is side-cast . . . much of it has to be hauled and dumped along the mountainside trail to widen narrow sections. Goodfellow Brothers, Inc., assigned the most difficult hauling to 3 LeTourneau 16-ton, rear-dump Tournarockers . . . and according to James B. Goodfellow "They are working out *very* satisfactorily".

Here are contractor's own figures

Loading under a 2-yard rock shovel, the Tournarockers carry 9 to 11 bank yards each trip. On one 2800-foot, one-way haul, actual job records show that Tournarockers easily handle shovel production of 1000 yds. every 8-hour shift. This rate of production, day in, day out, helps keep the job on schedule in spite of the rough haul roads, steep grades, and confined hauling conditions at altitudes of 2000 feet.

13′ 9″ turn radius speeds handling

Short, 90° turns, and positive electric steer by push-button control, permit easy turning and spotting anywhere along the narrow trail for load and dump position. Oversize, disc-type air brakes on all 4 wheels (4176 sq. in. total braking surface) give operators complete safety throughout the hauling cycle. Positive holding action of 4-wheel brakes . . . plus front-wheel drive on 186 h.p. Tournapull prime mover . . . let the Tournarockers dump safely out over the edge of mountainside fills. Simple electric hoist raises body to vertical position . . . streamlined bowl clears loads instantly.

Important savings for you

These same revolutionary Tournarocker advantages that are helping Goodfellow Brothers, Inc., lick steep slopes and rough going on the Pine Canyon project offer new low-hauling costs for your jobs, too. Ask your LeTourneau Distributor about this 16-ton, rear-dump Tournarocker. He can also give you complete information on 9-ton and 35-ton Tournarockers . . . and will show you money-saving interchangeability with Carryall Scrapers, bottom-dump hoppers, cranes, flat-beds and other auxiliary hauled units. Your investment dollar provides steady year-round earnings with interchangeable auxiliary units at approximately 25% of the cost of the original unit. Write or call NOW!

Big target . . . Operator on Goodfellow Brothers' 2-yard shovel has large target with Tournarocker's 12′ 5″ x 8′ top opening . . . speeds shovel swings, has less spillage.

Rock body . . . Here's a typical load of big-chunk rock carried by Tournarockers along Pine Canyon's slopes. 186 h.p. for 16-ton capacity licks the toughest hauling conditions.

90 turns with positive power steer . . . Short 13′ 9″ turning radius is an important advantage where operators have to turn and dump their loads along these narrow trails.

Front-wheel drive . . . Means you can keep the drivewheels of the prime mover on firm ground. Front or rear wheel air brakes can be set independently.

LETOURNEAU PEORIA, ILLINOIS **TOURNAROCKERS**

HIGH SPEED on RUBBER PLUS TRACTION ADVANTAGES of a CRAWLER

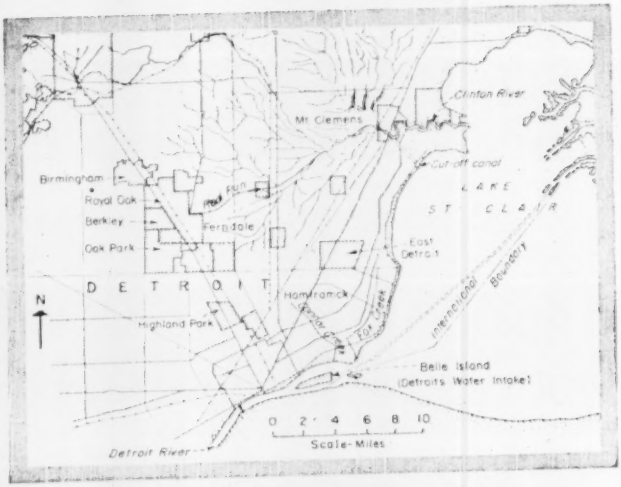

Detroit's stream-pollution problem

Stream and river pollution in and around Detroit—a controversial issue for several years—threatens to worsen unless quicker, stronger measures are taken.

There are many offenders. Detroit's water supply, from Lake St. Clair, is threatened by communities and industrial plants discharging untreated or inadequately treated sewage into the lake. In turn, pollution from Detroit and adjacent communities contaminates the lower Detroit River.

But considerable progress in pollution abatement has been made in the past two years. It's due to joint efforts of federal, state and municipal sanitary engineers, plus some cooperation from industry.

Detroit's problem of maintaining a safe supply of water and reducing its stream pollution seem largely due to the enormous population involved; but these same problems are no less vital to some outlying communities.

• Storm water relief—One of Detroit's current headaches is to provide storm-water relief sewers, and still comply with health and water pollution laws. Crux of the problem is that the state's water-pollution law, amended last year to create a Water Resources Commission, gives broad powers for . . . "regulating and restricting the pollution content of any waste material or polluting substance discharged into any lake, river or stream of the state".

It is virtually impossible for Detroit to meet pollution regulations since its major sewers are of the combined type. Dry-weather flow is treated, but during heavy rains, the combined sewage and surface run-off is discharged untreated.

Cost of treating all of Detroit's combined flood water and sewage would be prohibitive. Estimates range upward of $200 million and it would take several years to construct adequate treatment plant facilities. On the other hand, it would cost $150 million or more to extend the city's present intake line to Lake Huron.

The present sewage-treatment plant won state approval when it was completed 10 years ago. It's primary sedimentation process and chlorination of effluent has helped river pollution tremendously. It now appears, however, that a higher type treatment is desired by state authorities, although no nuisance has been attributed to the effluent.

Detroit obtained permission recently to build a large sewer and pumping station which will divert combined sewer overflows from Fox Creek to Conner Creek. But the city will be required to clean up the pollution in Conner Creek caused by the Fox Creek diversion, as well as the combined sewer overflows already discharging into Conner Creek.

• Flood relief—Two projects now under construction by the Corps of Engineers are first steps in a $2,000,000 program to give flood relief to several communities in the area, the largest, Royal Oak. One project is a 2-mi, $370,000 cut-off canal opening off the Clinton River and extending southward to Lake St. Clair. Started early last year under the direction of Col. Louis J. Runnigg, until recently, Detroit District Engineer, it will help alleviate floods in the lower Clinton River. It may, however, aggravate pollution at Mt. Clemens' water intake and at a large public bathing beach.

The second, started last month under Lt. Col. John D. Bristor, new district engineer at Detroit, involves deepening and widening 12 miles of Red Run, a tributary of the Clinton River. Both should be completed by July, 1951.

Detroit isn't alone in its stream-pollution troubles. Several smaller communities all the way from Port Huron to the mouth of the Detroit River face similar problems. Some have taken definite steps to abate their pollution; others are unable to raise funds; some still "plan."

Mt. Clemens is building a $2,000,000 sewage-treatment plant to keep from polluting Clinton River as well as its own water supply. And several industrial firms already are taking steps to treat their wastes. Port Huron is starting construction of its sewage-treatment facilities, but must raise additional funds to complete its interceptors.

• An international problem—The International Joint Commission under the chairmanship of A. G. Stanley, of the U. S. Section, also is deeply concerned with stream-pollution abatement in the area. (It administers a treaty forbidding pollution of Canadian-American waters.) Although the commission has no enforcement powers, it can be expected to report strong recommendations to Congress should pollution become intolerable.

• Tentative standards—One of the latest proposals is a tentative set of standards for the quality of water based on the purpose of its usage. These standards, now under consideration by the Detroit Regional Planning Commission, deal with seven uses of water. They are domestic consumption, industrial processing water, cooling water for industry, bathing, recreational and boating, fishing and hunting, and wild life.

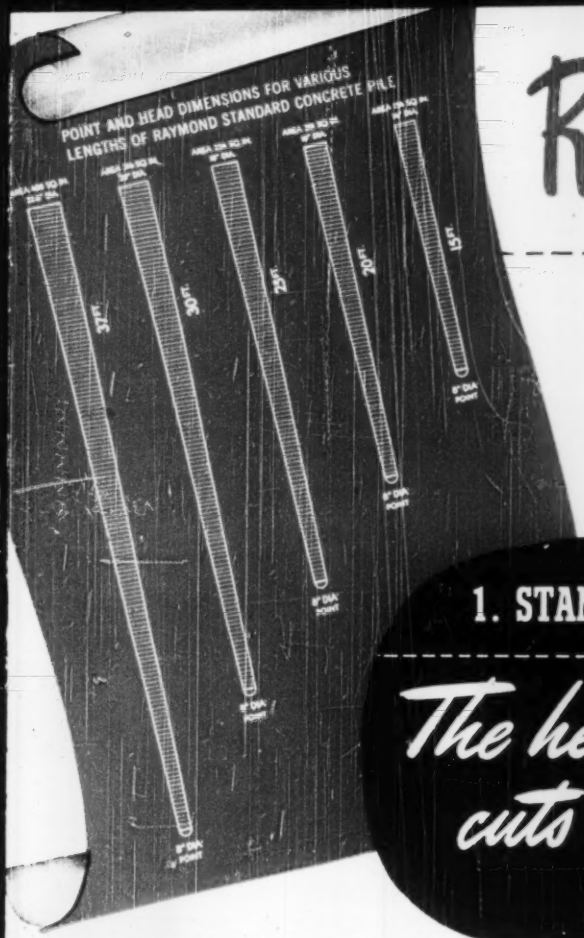

Raymond MAKES 5 TYPES OF CONCRETE PILES

1. STANDARD
2. STEP-TAPER
3. PIPE STEP-TAPER
4. COMPOSITE
5. GOW CAISSONS

Raymond installs every type of pile: cast-in-place concrete, precast concrete, steel pipe, wood and H-beam. Raymond operations include underpinning, borings and soil investigations, waterfront construction and harbor and river improvements.

1. STANDARD PILES

The heavy taper cuts costs...

Note that the permanent steel shell maintains the soil pressure developed during driving and while the concrete is setting, thus insuring a perfect pile free from distortion with a high load capacity.

Raymond Standard Concrete Piles have a heavy, uniformly tapered permanent steel shell. On friction piles, this taper acts like a wedge, giving these specific advantages:

1. Driving resistance is maintained.
2. The load is transmitted to the soil through the entire length of the pile.
3. The load can be carried by shorter piles, because of their greater carrying capacity.
4. Since shorter piles cost less to drive, the taper usually results in substantial savings.

Each of these statements has been tested and proved innumerable times. The evidence is at your disposal at any of our offices. Your inquiry is cordially invited.

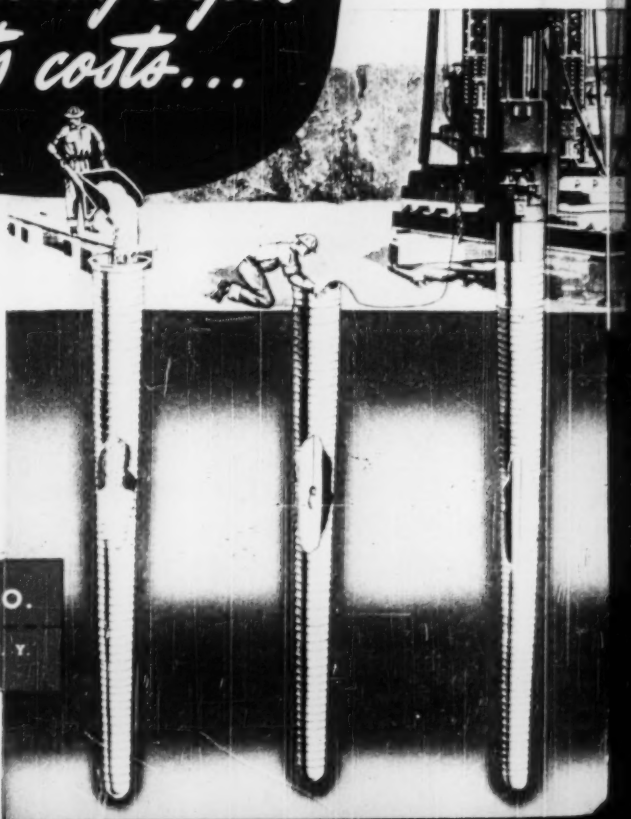

Raymond CONCRETE PILE CO.

140 CEDAR ST., NEW YORK 6, N. Y.

BRANCH OFFICES: Boston, Syracuse, Philadelphia, Baltimore, Washington, Pittsburgh, Atlanta, Miami, Houston, Kansas City, St. Louis, Cleveland, Chicago, Detroit, Portland, San Francisco, Oakland, Los Angeles and principal cities in Latin America.

Only TIMKEN offers all 3 rock bit types...

1. **MULTI-USE.** Basic removable rock bit for 18 years. Gives lowest cost per foot when full increments of the steel can be drilled and when all bits are returned for proper reconditioning. Low cost. Requires less policing than carbide insert bits.

2. **CARBIDE INSERT.** For extremely hard and abrasive ground, small holes, extra deep holes. Lets drillers spend more time drilling—less time changing bits. Holes go down faster. Bit reconditioning is simplified.

and a complete Rock Bit Engineering Service!

3. **ONE-USE "SPIRALOCK".** For use where reconditioning is impractical or undesirable. Offers lowest unit bit cost. New "Spiralock" union holds bit on dependably—permits easy removal. Simplifies steel preparation, makes drill steels last longer.

Multi-use, carbide insert, or one-use "Spiralock" . . . Timken makes them *all!* And to help you select the *one best bit* for each of your jobs, Timken offers the service of the world's largest field engineering organization devoted exclusively to rock bit problems.

With all three types of bits to draw from, the Timken Rock Bit Engineering Service can give you the drilling performance your job requires . . . whether it's lowest bit cost, lowest cost per foot of hole, greatest possible drilling speed, or other desired advantages.

Call upon the Timken Rock Bit Engineering Service at any time, through your nearest Timken Service and Sales office. For full information on rock bits, write on your company letterhead for our newest rock bit book, "Timken Removable Rock Bits". It shows our full line of bits in actual size, with detailed descriptions. The Timken Roller Bearing Company, Canton 6, Ohio. Cable address: "TIMROSCO".

TIMKEN

. . . your best bet for the best bit . . . for every job